

PARSONS

150 Federal Street • Boston, Massachusetts 02110 • (617) 946-9400 • Fax: (617) 946-9777 • www.parsons.com

September 30, 2005

Mr. Scott Bradley
U.S. Army Corps of Engineers
Engineering and Support Center, Huntsville
Attn: CEHNC-FS-IS
4820 University Square
Huntsville, Alabama 35816-1822

**Subject: Submittal of Draft Proposed Plan for No Action / No Further Action SWMUs
 (SEAD-58 and SEAD-63) and Submittal of Draft Proposed Plan for Seventeen
 SWMUs Requiring Institutional Controls (SEADs 13, 39, 40, 41, 43/56/69, 44A, 44B,
 52, 62, 64B, 64C, 64D, 67, 122B, and 122E)
 Contract DACA87-02-D-0005, Delivery Order 26 and Delivery Order 28
 Seneca Army Depot Activity; File No. 1017A**


Dear Mr. Bradley:

Parsons is pleased to submit two (2) Draft Proposed Plans for SWMUs located at the Seneca Army Depot Activity located in Romulus, New York. The first Draft Proposed Plan is for No Action / No Further Action for SEAD-58 and SEAD-63, respectively. The second Draft Proposed Plan is for Seventeen SWMUs Requiring Institutional Controls (SEADs 13, 39, 40, 41, 43/56/69, 44A, 44B, 52, 62, 64B, 64C, 64D, 67, 122B, and 122E).

The work was performed in accordance with the Scope of Work (SOW) for Delivery Order 26 and Delivery Order 28 under Contract DACA87-02-D-0005.

Parsons appreciates the opportunity to provide the Army with this document. Should you have any questions, please do not hesitate to call me at (617) 449-1405 to discuss them.

Sincerely,

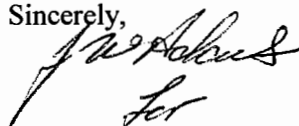

Todd Heino, P.E.
Program Manager

Enclosures

cc: Mr. S. Absolom, SEDA
 Mr. R. Battaglia, CENAN
 Mr. K. Hoddinott, USACHPPM (PROV)
 Mr. C. Boes, USAEC



PARSONS

150 Federal Street • Boston, Massachusetts 02110 • (617) 946-9400 • Fax: (617) 946-9777 • www.parsons.com

September 30, 2005

Mr. Julio F. Vazquez, Project Manager
U.S. Environmental Protection Agency, Region II
Superfund Federal Facilities Section
290 Broadway, 18th Floor
New York, NY 10007-1866

Mr. Kuldeep K. Gupta, P.E.
NYSDEC
Division of Environmental Remediation
Remedial Bureau A, Section C
625 Broadway
Albany, NY 12233-7015

Ms. Charlotte Bethoney
Bureau of Environmental Exposure Investigation
Flanigan Square, Room 300
547 River Street
Troy, NY 12180


Subject: Submittal of Draft Proposed Plan for No Action / No Further Action SWMUs (SEAD-58 and SEAD-63) and Submittal of Draft Proposed Plan for Seventeen SWMUs Requiring Institutional Controls (SEADs 13, 39, 40, 41, 43/56/69, 44A, 44B, 52, 62, 64B, 64C, 64D, 67, 122B, and 122E) Contract DACA87-02-D-0005, Delivery Order 26 and Delivery Order 28 Seneca Army Depot Activity; NYS ID#8-50-006; CERCLIS ID# NY0213820830

Dear Mr. Vazquez/Mr. Gupta/Ms. Bethoney:

Parsons is pleased to submit two (2) Draft Proposed Plans for SWMUs located at the Seneca Army Depot Activity located in Romulus, New York. The first Draft Proposed Plan is for No Action / No Further Action for SEAD-58 and SEAD-63, respectively. The second Draft Proposed Plan is for Seventeen SWMUs Requiring Institutional Controls (SEADs 13, 39, 40, 41, 43/56/69, 44A, 44B, 52, 62, 64B, 64C, 64D, 67, 122B, and 122E).

Should you have any questions, please do not hesitate to call me at (617) 449-1405 to discuss them.

Sincerely,

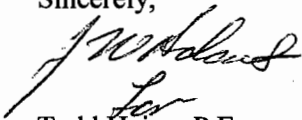

Todd Heino, P.E.
Program Manager

Enclosures

cc: Mr. S. Bradley, CEHNC
Mr. S. Absolom, SEDA
Mr. K. Hoddinott, USACHPPM (PROV)

Mr. C. Boes, USAEC
Mr. R. Battaglia, CENAN

P:\PIT\Projects\Huntsville HTW\TO #26 Decision Docs for Completed Removals (67, 39, 40 & 122B)\cvrltr093005.DOC






US Army, Engineering & Support Center
Huntsville, AL

Seneca Army Depot Activity
Romulus, NY



PARSONS

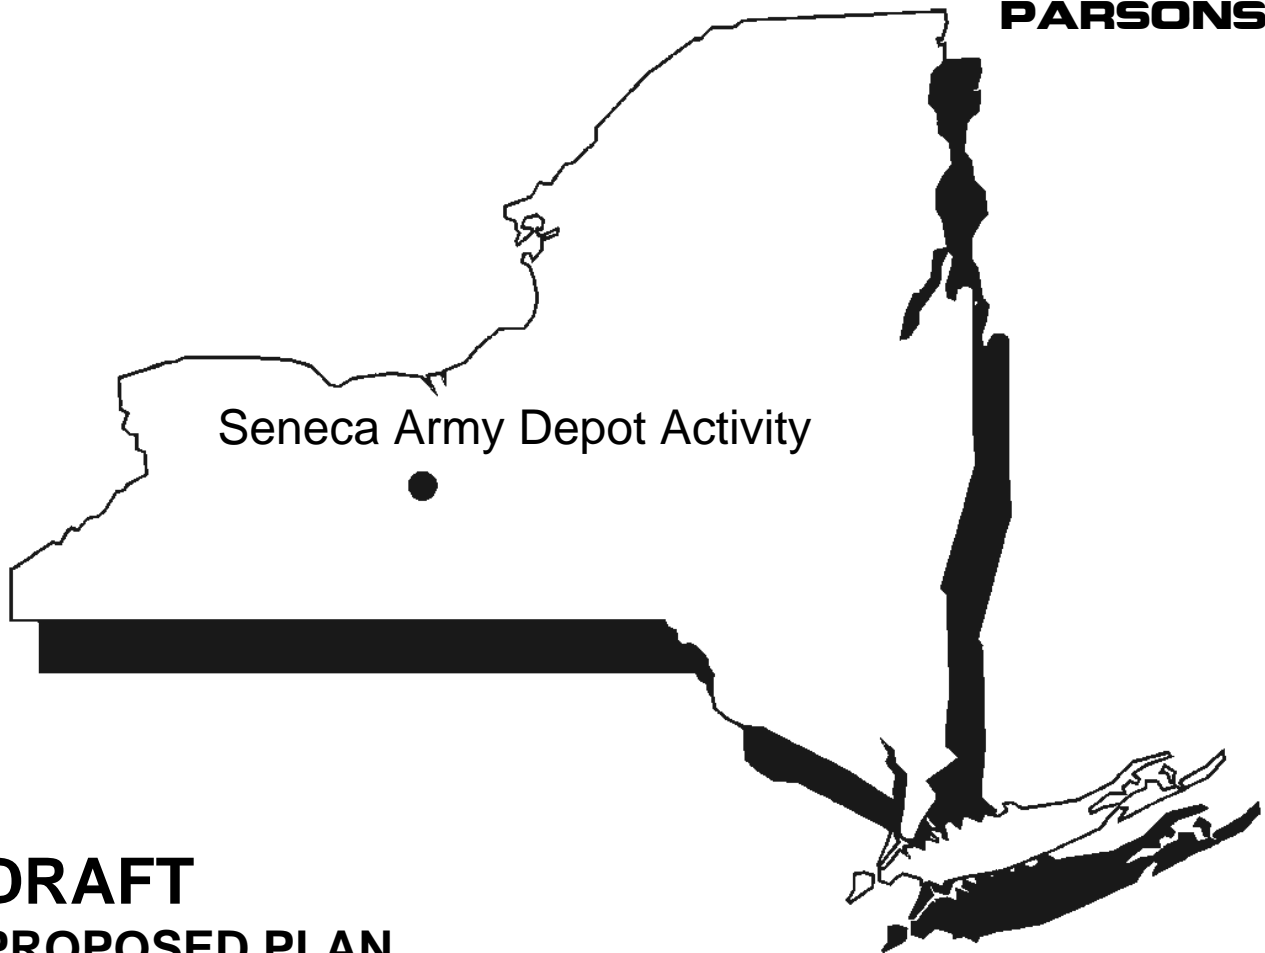

**DRAFT
PROPOSED PLAN
FOR SEVENTEEN SWMUs REQUIRING INSTITUTIONAL
CONTROLS (SEADs 13, 39, 40, 41, 43/56/69, 44A, 44B, 52,
62, 64B, 64C, 64D, 67, 122B, and 122E)
SENECA ARMY DEPOT ACTIVITY (SEDA)**

EPA Site ID# NY0213820830
NY Site ID# 8-50-006
CONTRACT NO. DACA87-02-D-0005
DELIVERY ORDER NO. 0026 & 0028

October 2005

**DRAFT Proposed Plan
 Seventeen SWMUs Requiring Institutional Controls
 (SEADs 13, 39, 40, 41, 43, 44A, 44B, 52, 56, 62, 64B, 64C, 64D, 67, 69, 122B, and
 122E)at the SENECA Army Depot Activity (SEDA)
 Romulus, New York**

TABLE OF CONTENTS

<u>Section Description</u>	<u>Page</u>
Table of Contents	i
List of Tables	iii
List of Figures	v
1 PURPOSE OF PROPOSED PLAN.....	1
2 COMMUNITY ROLE IN THE SELECTION PROCESS	3
3 SITE BACKGROUND	3
4 SITE DESCRIPTIONS.....	5
4.1 SEAD-13: Inhibited Red-Fuming Nitric Acid Disposal Site	5
4.2 SEAD-39: Building 121 Boiler Blowdown Leach Pit	5
4.3 SEAD-40: Building 319 Boiler Blowdown Leach Pit	6
4.4 SEAD-41: Building 718 Boiler Blowdown Leaching Pit.....	6
4.5 SEAD-43/56/69: Building 606 – Old Missile Propellant Test Laboratory/Herbicide and Pesticide Storage/Disposal Area	6
4.6 SEAD-44A: Quality Assurance Test Laboratory	7
4.7 SEAD-44B: Quality Assurance Test Laboratory	8
4.8 SEAD-52: Buildings 608 and 612 – Ammunition Breakdown Area.....	8
4.9 SEAD-62: Nicotine Sulfate Disposal Area near Buildings 606 or 612.....	8
4.10 SEAD-64B: Garbage Disposal Area.....	9
4.11 SEAD-64C: Garbage Disposal Area.....	9
4.12 SEAD-64D: Garbage Disposal Area.....	9
4.13 SEAD-67: Dump Site East of Sewage Treatment Plant No. 4.....	10
4.14 SEAD-122B: Small Arms Range, Airfield Parcel	10
4.15 SEAD-122E: Plane Deicing Area	11
5 SITE INVESTIGATIONS AND STUDIES.....	11
5.1 SEAD-13: Inhibited Red-Fuming Nitric Acid Disposal Site	11
5.2 SEAD-39: Building 121 Boiler Blowdown Leach Pit	14
5.3 SEAD-40: Building 319 Boiler Blowdown Leach Pit	15
5.4 SEAD-41: Blowdown Leaching Area	16

TABLE OF CONTENTS
(continued)

<u>Section Description</u>	<u>Page</u>
5.5 SEAD-43/56/69: Building 606 – Old Missile Propellant Test Laboratory/Herbicide and Pesticide Storage/Disposal Area	17
5.6 SEAD-44A: Quality Assurance Test Laboratory	19
5.7 SEAD-44B: Quality Assurance Test Laboratory	21
5.8 SEAD-52: Buildings 608 and 612 – Ammunition Breakdown Area.....	23
5.9 SEAD-62: Nicotine Sulfate Disposal Area near Buildings 606 or 612.....	23
5.10 SEAD-64B: Garbage Disposal Area.....	24
5.11 SEAD-64C: Garbage Disposal Area.....	24
5.12 SEAD-64D: Garbage Disposal Area.....	25
5.13 SEAD-67: Dump Site East of Sewage Treatment Plant No. 4.....	26
5.14 SEAD-122B: Small Arms Range, Airfield Parcel	28
5.15 SEAD-122E: Plane Deicing Area	30
6 SUMMARY OF RISK ASSESSMENT RESULTS.....	30
6.1 SEAD-13: Inhibited Red-Fuming Nitric Acid Disposal Site	32
6.2 SEAD-39: Building 121 Boiler Blowdown Leach Pit	33
6.3 SEAD-40: Building 319 Boiler Blowdown Leach Pit	33
6.4 SEAD-41: Building 718 Boiler Blowdown Leaching Pit.....	33
6.5 SEAD-43/56/69: Building 606 – Old Missile Propellant Test Laboratory/Herbicide and Pesticide Storage/Disposal Area	33
6.6 SEAD-44A: Quality Assurance Test Laboratory	33
6.7 SEAD-44B: Quality Assurance Test Laboratory	34
6.8 SEAD-52: Buildings 608 and 612 – Ammunition Breakdown Area.....	34
6.9 SEAD-62: Nicotine Sulfate Disposal Area near Buildings 606 or 612.....	34
6.10 SEAD-64B: Garbage Disposal Area.....	34
6.11 SEAD-64C: Garbage Disposal Area.....	35
6.12 SEAD-64D: Garbage Disposal Area.....	35
6.13 SEAD-67: Dump Site East of Sewage Treatment Plant No. 4.....	35
6.14 SEAD-122B: Small Arms Range, Airfield Parcel	35
6.15 SEAD-122E: Plane Deicing Area	35
7 SUMMARY OF REMEDIAL GOALS AND PROPOSED ACTION	36
8 REFERENCES	40
GLOSSARY.....	42

LIST OF TABLES

<u>TABLE NUMBER</u>	<u>TABLE TITLE</u>
1	SUMMARY OF SURFACE SOIL ANALYTICAL RESULTS – SEAD-13
2	SUMMARY OF SUBSURFACE SOIL ANALYTICAL RESULTS – SEAD-13
3	SUMMARY OF GROUNDWATER ANALYTICAL RESULTS – SEAD-13
4	SUMMARY OF SURFACE WATER ANALYTICAL RESULTS – SEAD-13
5	SUMMARY OF SEDIMENT ANALYTICAL RESULTS – SEAD-13
6	SUMMARY OF TCRA SOIL ANALYTICAL RESULTS – SEAD-39
7	SUMMARY OF TCRA SOIL ANALYTICAL RESULTS – SEAD-40
8	SUMMARY OF TCRA SOIL ANALYTICAL RESULTS – SEAD-41
9	SUMMARY OF SOIL ANALYTICAL RESULTS – SEAD-43/56/69
10	SUMMARY OF GROUNDWATER ANALYTICAL RESULTS – SEAD-43/56/69
11	SUMMARY OF SURFACE WATER ANALYTICAL RESULTS – SEAD-43/56/69
12	SUMMARY OF SEDIMENT ANALYTICAL RESULTS – SEAD-43/56/69
13	SUMMARY OF SOIL ANALYTICAL RESULTS – SEAD-44A
14	SUMMARY OF GROUNDWATER ANALYTICAL RESULTS – SEAD-44A
15	SUMMARY OF SURFACE WATER ANALYTICAL RESULTS – SEAD-44A
16	SUMMARY OF SEDIMENT ANALYSIS RESULTS – SEAD-44A
17	SUMMARY OF SOIL ANALYTICAL RESULTS – SEAD-44B
18	SUMMARY OF GROUNDWATER ANALYTICAL RESULTS – SEAD-44B
19	SUMMARY OF SURFACE WATER ANALYTICAL RESULTS – SEAD-44B
20	SUMMARY OF SEDIMENT ANALYSIS RESULTS – SEAD-44B
21	SUMMARY OF SOIL ANALYTICAL RESULTS – SEAD-52
22	SUMMARY OF SOIL ANALYTICAL RESULTS – SEAD-62
23	SUMMARY OF GROUNDWATER ANALYTICAL RESULTS – SEAD-62
24	SUMMARY OF SOIL ANALYTICAL RESULTS – SEAD-64B
25	SUMMARY OF GROUNDWATER ANALYTICAL RESULTS – SEAD-64B
26	SUMMARY OF SURFACE WATER ANALYTICAL RESULTS – SEAD-64B
27	SUMMARY OF SEDIMENT ANALYTICAL RESULTS – SEAD-64B
28	SUMMARY OF SOIL ANALYTICAL RESULTS – SEAD-64C
29	SUMMARY OF GROUNDWATER ANALYTICAL RESULTS – SEAD-64C
30	SUMMARY OF SOIL ANALYTICAL RESULTS – SEAD 64D
31	SUMMARY OF GROUNDWATER ANALYTICAL RESULTS – SEAD-64D
32	SUMMARY OF TCRA SOIL ANALYTICAL RESULTS – SEAD-67
33	SUMMARY OF ESI SOIL ANALYTICAL RESULTS – SEAD-67
34	SUMMARY OF ESI GROUNDWATER ANALYTICAL RESULTS – SEAD-67
35	SUMMARY OF ESI SURFACE WATER ANALYTICAL RESULTS – SEAD-67
36	SUMMARY OF ESI SEDIMENT ANALYTICAL RESULTS – SEAD-67
37	SUMMARY OF LEAD RESULTS IN SOIL AFTER TREATABILITY STUDY SEAD-122B
38	SUMMARY OF 2002 SOIL ANALYTICAL RESULTS – SEAD-122B

LIST OF TABLES
(continued)

<u>TABLE NUMBER</u>	<u>TABLE TITLE</u>
39	SUMMARY OF 2002 GROUNDWATER ANALYTICAL RESULTS – SEAD-122B
40	SUMMARY OF SOIL ANALYTICAL RESULTS – SEAD-122B
41	SUMMARY OF SOIL ANALYTICAL RESULTS – SEAD-122E
42	SUMMARY OF GROUNDWATER ANALYTICAL RESULTS – SEAD-122E
43	CALCULATION OF NON-CARCINOGENIC AND CARCINOGENIC RISKS – SEAD-13
44	CALCULATION OF NON-CARCINOGENIC AND CARCINOGENIC RISKS – SEAD-43/56/69
45	CALCULATION OF NON-CARCINOGENIC AND CARCINOGENIC RISKS – SEAD-44A
46	CALCULATION OF NON-CARCINOGENIC AND CARCINOGENIC RISKS – SEAD-44B
47	CALCULATION OF NON-CARCINOGENIC AND CARCINOGENIC RISKS – SEAD-52
48	CALCULATION OF NON-CARCINOGENIC AND CARCINOGENIC RISKS – SEAD-62
49	CALCULATION OF NON-CARCINOGENIC AND CARCINOGENIC RISKS – SEAD-64B
50	CALCULATION OF NON-CARCINOGENIC AND CARCINOGENIC RISKS – SEAD-64C
51	CALCULATION OF NON-CARCINOGENIC AND CARCINOGENIC RISKS – SEAD-64D
52	CALCULATION OF NON-CARCINOGENIC AND CARCINOGENIC RISKS – SEAD-122E

LIST OF FIGURES

<u>FIGURE NUMBER</u>	<u>FIGURE TITLE</u>
1	Future Land Use and Location of IC SWMUs
2	Location of SEADs 13 and 67
3	Location of SEADs 39 and 40
4	Location of SEAD 41
5	Location of SEADs 43/56/69, 44A, 44B, 52, 62, 64B, and 64C
6	Location of SEADs 64D, 122B, and 122E

#####

Proposed Plan – Draft



Seventeen SWMUs Requiring Institutional Controls (SEADs 13, 39, 40, 41, 43, 44A, 44B, 52, 56, 62, 64B, 64C, 64D, 67, 69, 122B, and 122E) SENECA ARMY DEPOT ACTIVITY (SEDA) Romulus, New York



October 2005

#####

1 PURPOSE OF PROPOSED PLAN

This Proposed Plan describes the preferred remedy for 17 solid waste management units (SWMUs), designated as SEADs-13, 39, 40, 41, 43/56/69, 44A, 44B, 52, 62, 64B, 64C, 64D, 67, 122B, and 122E, located within the Seneca Army Depot Activity (SEDA or the Depot) in the Towns of Varick and Romulus, New York, shown on **Figure 1**.

The Proposed Plan identifies the preferred remedial option for each of the 17 SWMUs, and provides the justification and rationale for the recommended alternative at each site. Representatives of the U.S. Army (Army) developed the Proposed Plan in cooperation with the U.S. Environmental Protection Agency, Region 2 (USEPA) and the New York State Department of Environmental Conservation (NYSDEC).

The Army is issuing this Proposed Plan as part of its public participation responsibilities under Section 117(a) of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) of 1980, as amended, and Section 300.430(f) of the National Contingency Plan (NCP). This Proposed Plan is being provided to inform the

public of the Army's preferred and recommended remedial alternative for each site. The Proposed Plan is intended to solicit public review and comment on all remedial options evaluated, as well as to specify the Army's preferred remedial option for the 17 SWMUs. The Army's preferred remedy for each of the sites in this Proposed Plan is to establish institutional controls (ICs). The specific ICs recommended by the Army are described as follows:

- Reversionary Deed restriction for the following sites:
 - SEAD-43: Building 606 – Old Missile Propellant Test Laboratory
 - SEAD-44A: Quality Assurance Test Laboratory
 - SEAD-44B: Quality Assurance Test Laboratory
 - SEAD-52: Buildings 608 and 612 – Ammunition Breakdown Area
 - SEAD-56: Building 606 – Herbicide and Pesticide Storage
 - SEAD-62: Nicotine Sulfate Disposal Area near Buildings 606 or 612
 - SEAD-69: Building 606 – Disposal Area

A Reversionary Deed was used to convey land in the southern part of the former Depot to the State of New York for the construction of the Five Points Correctional Facility. The deed limits the use of the site in perpetuity to a correctional facility, and indicates that "...the property shall not be sold, leased, mortgaged, assigned or otherwise disposed of" without the consent of the Government. The property reverts back to the US Government if either of these conditions is violated.

- Reversionary Deed, described above, and unauthorized digging restriction:
 - SEAD-64C: Garbage Disposal Area
- Groundwater use restriction to prevent access to or use of groundwater until groundwater standards are achieved.
 - SEAD-41: Building 718 Boiler Blowdown Leaching Pit

A Deed was used to document the transfer of the land currently used for the Hillside Children's Center in the north end of the former Depot to the Seneca County Industrial Development Agency (SCIDA). As part of the Deed, the Army notified SCIDA that groundwater contamination had been identified in the vicinity of Building 718. The Deed further stated "The Grantee, its successors and assigns, and agree that in the event they use the groundwater as a public water supply source at the Property, they will comply with all applicable laws and regulations." Therefore, the Army has proposed and implemented an IC that prohibits access to and use of groundwater.

- Groundwater use restriction to prevent access to or use of groundwater until groundwater standards are achieved.
 - SEAD-13: Inhibited Red-Fuming Nitric Acid (IRFNA) Disposal Site
- Continuation of ICs imposed on all land within the Planned Industrial/Office Development (PID) area that restricts use and access to the

groundwater and prohibits the use of the land for residential activities until and unless such access or use is reviewed and approved by the Army and the USEPA.

- SEAD-39: Building 121 Boiler Blowdown Leach Pit
- SEAD-40: Building 319 Boiler Blowdown Leach Pit
- SEAD-67: Dump Site East of Sewage Treatment Plant No 4
- Residential use restriction over the Airfield Parcel, prohibiting the development or use of property for residential housing, elementary and secondary schools, child care facilities, and playgrounds.
 - SEAD-122B: Small Arms Range, Airfield Parcel
 - SEAD-122E: Plane Deicing Area
- Unauthorized digging restriction, which would be established to prevent unauthorized excavation.
 - SEAD-64B: Garbage Disposal Area.
- Unauthorized digging restriction and a groundwater use restriction to prevent access to or use of groundwater until groundwater standards are achieved.
 - SEAD-64D: Garbage Disposal Area.

Information provided herein, was presented to and discussed with representatives of USEPA and NYSDEC and provides the basis for the Army identifying these sites as requiring ICs.

This Proposed Plan identifies the preferred remedy and discusses the reasons for this preference. The Army will select a final remedy for each site only after careful consideration is given to all comments received during the public comment period, and subsequent to final consultation with the USEPA and NYSDEC.

2 COMMUNITY ROLE IN THE SELECTION PROCESS

The Army, the USEPA, and the NYSDEC rely on public input to ensure that the concerns of the community are considered in selecting an effective remedy for each SWMU. A public comment period has been set from {DATE} through {DATE} to provide an opportunity for public participation in the remedy selection process for the sites. A public meeting is scheduled for {DATE} at the {LOCATION} beginning at {TIME}.

At the public meeting, the results of the site investigations and interim remedial actions (RAs) performed at the sites (as applicable) will be presented. The Army will also provide a summary of the preferred remedy, establishing ICs, for each site. During the presentation, the Army invites the public to participate in a question-and-answer period, during which time the public can ask questions or submit written comments on the Proposed Plan.

Verbal and written comments received from the public during the public meeting will be documented in the Responsiveness Summary section of the Record of Decision (ROD) document. The final ROD formalizes the selection of the remedy.

Written comments may be sent to:

Mr. Stephen Absolom
BRAC Environmental Coordinator
Building 123
5786 State Route 96
PO Box 9
Seneca Army Depot Activity
Romulus, New York 14541-0009

Information and data summarized within this Proposed Plan for each of the 17 SWMUs are presented and described in greater detail in the following documents: “Decision Document – Mini Risk Assessment SEAD-13 Inhibited Red Fuming

Nitric Acid (IRFNA) Disposal Site, *Final*” (Parsons, 2004a); “Ordnance and Explosives Engineering Evaluation and Cost Assessment, *Final*” (Parsons, 2004b); “VOC Sites – SEADs 39 and 40, Time-Critical Removal Action” (Weston, 2004a); “Time-Critical Removal Action Metal Sites – SEAD 67” (Weston, 2004b); “UXO and Soil Remediation AREA-44A” (Weston, 2003); “Action Memorandum and Decision Document, Time-Critical Removal Actions, Four Metals Sites (SEADs 24, 50/54, & 67)” Report (Parsons, 2002a); “Decision Document – Mini Risk Assessment (SEADs 9, 27, 28, 32, 33, 34, 43, 44A, 44B, 52, 56, 58, 62, 64A, 64B, 64C, 64D, 66, 68, 69, 72, and 120B), *Final*” (Parsons, 2002c); “Decision Document for Time-Critical Removal Actions, Three VOC Sites, *Final*” Report (Parsons, 2002b); “Investigation of Environmental Baseline Survey Non-Evaluated Sites, *Final*” (Parsons, 1999); “SWMU Classification Report, *Final*” (Parsons, 1994); which should be reviewed and consulted.

The public is encouraged to schedule a time to review the project documents at the Seneca Army Depot Activity repository (location provided below) to develop a better understanding of each of the listed sites and the investigations and studies that have been conducted.

Seneca Army Depot Activity
Building 123
5786 State Route 96
Romulus, New York 14541-0009
(607) 869-1309
Hours: Mon. – Thurs. 8:30 a.m. – 2:30 p.m.

3 SITE BACKGROUND

SEDA previously occupied approximately 10,600 acres of land located in the Towns of Varick and Romulus in Seneca County, New York. The former military facility was owned by the U.S. Government and operated by the Army between 1941 and approximately 2000, when SEDA’s military mission ceased.

SEDA is located in an uplands area, which forms a divide separating two of the New York Finger Lakes, Cayuga Lake on the east and Seneca Lake on the west. The elevation of the Depot is approximately 600 feet (ft.) above mean sea level (MSL).

On July 14, 1989, the USEPA proposed SEDA for inclusion on the National Priorities List (NPL). The USEPA recommendation was approved and finalized on August 30, 1990, when SEDA was listed in Group 14 of the Federal Facilities portion of the NPL.

Once SEDA was listed on the NPL, the Army, USEPA, and NYSDEC identified 57 SWMUs where historic data or information suggested, or evidence existed to support, that hazardous materials or hazardous wastes had been handled at the sites, and information or data suggested that identified materials may have possibly been released and migrated into the environment. Each of these sites was identified in the "Federal Facilities Agreement" (i.e., FFA, USEPA, NYSDEC, Army, 1993) signed by the three parties in 1993. This list was subsequently expanded to include 72 sites when the Army completed the "SWMU Classification Report, *Final*" (Parsons, 1994), which was prepared in response to the terms of the FFA. SEDA was a generator and Treatment, Storage and Disposal Facility (TSDF) for hazardous materials; and thus, subject to regulation under the Resource Conservation and Recovery Act (RCRA), as appropriate. Under this permit system, corrective action is required at SWMUs, as needed.

Remedial goals are the same for CERCLA and RCRA; thus, when the 72 SWMUs were classified in the "SWMU Classification Report, *Final*" (Parsons, 1994), the Army recommended that they be listed either as No Action sites or Areas of Concern (AOCs). SWMUs listed as AOCs in the "SWMU Classification Report, *Final*" (Parsons, 1994) were then scheduled for further investigations

based upon data and potential risks to the environment.

In 1995, SEDA was designated for closure under the Department of Defense's (DoD's) Base Realignment and Closure (BRAC) process. With SEDA's inclusion on the BRAC list, the Army's emphasis expanded from expediting necessary investigations and remedial actions at prioritized sites to include the release of non-affected portions of the Depot to the surrounding community for their reuse for beneficial, non-military purposes (i.e., industrial, municipal, and residential).

As part of the BRAC process, the Army commissioned an Environmental Baseline Survey (EBS) of the Depot. Under the EBS, all of the property identified as subject to transfer or lease at a facility (e.g., SEDA) was classified into one of the seven standard environmental conditions of property area types as defined by the Community Environmental Response Facilitation Act (CERFA) guidance and the Department of Defense (DoD) BRAC Cleanup Plan Guidebook. This was achieved by identifying, characterizing, and documenting the obviousness of the presence, or likely presence, of a release or a threatened release of a hazardous substance or petroleum product associated with the historical and current use of Seneca Army Depot Activity. The complete details of the EBS are summarized in the document "U.S. Army Base Realignment and Closure 95 Program; Environmental Baseline Survey Report", Seneca Army Depot Activity, New York (Woodward-Clyde Federal Services, 1997). At the completion of the EBS, 113 BRAC parcels of land were identified and classified within the 10,600 acre Depot.

Since the inclusion of the SEDA in the BRAC program, the Army has transferred approximately 8,000 acres to the community. An additional 250 acres of land have undergone a federal-to-federal transfer for continued use by the U.S. Coast Guard.

4 SITE DESCRIPTIONS

4.1 SEAD-13: Inhibited Red-Fuming Nitric Acid Disposal Site

SEAD-13 is located in the northeast portion of the Depot and includes two disposal areas, SEAD-13-East and SEAD-13-West, located on the eastern and western sides of the south end of the Duck Pond (**Figures 1 and 2**). Historically, SEAD-13 was active during the early 1960s to dispose of quantities of unserviceable Inhibited Red-Fuming Nitric Acid (IRFNA), an oxidizer used in missile liquid propellant systems. It was originally thought that both areas had disposal pits but observations during the geophysical survey performed in 1993/1994 indicated that SEAD-13-East was the only area containing pits, with six (possibly seven) elongated pits being observed. The pits, which were each generally 20 ft. to 30 ft. long, oriented east to west, were marked by sparse vegetation, crushed shale, and 1-inch limestone pieces at the surface. The SEAD-13-West area had no visible evidence of former disposal pits at the surface in 1993/1994 like at SEAD-13-East; however, there was an area characterized by sparse vegetation and some crushed shale.

During the operation of the IRFNA Disposal Site, the pits were utilized as a neutralization area for IRFNA. The barrels of unserviceable IRFNA were stored on pallets near the west end of the pits. A stainless steel ejector, operated by water pressure, was fitted into one barrel at a time with water flowing through the ejector. The IRFNA mixed with water in the ejector and was then discharged through a long polyethylene hose under the water surface in the pit being used. During this period, the IRFNA/water mixture mixed with the limestone in the pit to facilitate the neutralization of the acid. Ten barrels were typically discharged into each pit during one day of operation.

4.2 SEAD-39: Building 121 Boiler Blowdown Leach Pit

Building 121 is a boiler plant located in the administrative area (i.e., halfway along the eastern border) of the SEDA. A Time Critical Removal Action (TCRA) was completed by Weston at SEAD-39 in August 2003, and a total of 34 tons of soil were excavated to a depth of 1-foot. The excavated area was backfilled and returned to its original grade. Building 121 and two paved roads helped define and limit the border of the excavation.

SEAD-39 is the historic blowdown leaching area that was located exterior to, and immediately north of, Building 121 (**Figures 1 and 3**). Use of the leaching area was terminated in 1979 or 1980 when all boiler blowdown points within the Depot were connected to the sanitary sewer. After the SEAD-39 blowdown point was connected to the sewer, the area of the historic discharge was regraded and covered with topsoil. The Army estimates that six inches of fill and topsoil were placed in this area; thus, no depression or indication of where the historic blowdown leaching area was previously located were visible. Center Street, which runs in an east-west direction, is located 50 ft. to the north of Building 121 and the suspected location of the former leach pit.

Prior to connecting the boiler blowdown points to the sewer in 1979-1980, blowdown was reportedly released three times a day, and the discharged liquid was allowed to flow onto the ground at the blowdown point where it either infiltrated into the ground or flowed into the street. Each boiler is reported to have discharged between 400 and 800 gallons of blowdown liquids per day. The boiler blowdown is suspected to have contained water, tannins, caustic soda (sodium hydroxide), and sodium phosphate.

4.3 SEAD-40: Building 319 Boiler Blowdown Leach Pit

Building 319 is a boiler plant located on 1st Street at the SEDA, which is located in the east-central portion of the Depot, shown in **Figure 1**. A TCRA was completed by Weston in August 2003, and approximately 39 tons of soil were removed from SEAD-40. The impacted soil was excavated in one section to a depth of 1 ft. below ground surface (bgs) and in another section to a depth of 6 ft. bgs. The excavated areas were backfilled and returned to their original grades. The excavation was limited in size by railroad tracks to the north and a parking lot to the south.

The historic blowdown leach pit that constitutes SEAD-40 was located in a drainage ditch next to the railroad tracks that are located north of Building 319 (**Figure 3**). A drainage pipe originating in Building 319 is suspected to have carried blowdown liquids to the drainage ditch, where they were released and allowed to flow onto the ground. The drainage ditch originated at the mouth of the drainage pipe approximately 30 ft. northeast of Building 319. The drainage ditch continued for approximately 400 ft. to the north where it eventually leveled out into a grassy field. The ground surface to the north of Building 319 and to the south of the drainage ditch was covered with asphalt.

Between the time when the boilers were first installed and when the blowdown points were connected to the sanitary sewer system (1979-1980), the boilers discharged blowdown three times every 24 hours. It is estimated that the average blowdown flow totaled 400 to 800 gallons per day. The blowdown flow drained partly into the drainage ditch and partly into the ground. It is presumed that the boiler blowdown contained water condensate and a small amount of tannins, caustic soda (sodium hydroxide), and sodium phosphate that were used to reduce corrosion and scale in the boiler.

4.4 SEAD-41: Building 718 Boiler Blowdown Leaching Pit

SEAD-41 is the blowdown leaching area suspected to have existed in the drainage ditch located approximately 40 ft. west of Building 718, an abandoned boiler plant located in the northern end of the former Depot, in property currently used for the Hillside Children's Center (**Figures 1 and 4**). A TCRA was conducted at SEAD-41, and approximately 5 cubic yards (cy) of petroleum-contaminated soils were removed in 2000.

It is estimated that a total of 400 to 800 gallons per day during 1979 and 1980 when all blowdown points were connected to the sanitary sewer system. The discharge flow drained partly into nearby drainage ditches and partly onto the ground. It is unknown whether the blowdown liquid was discharged directly into the ditch to the west of Building 718, or whether it was discharged next to the building and flowed over the ground into the ditch. It is presumed that the boiler blowdown contained water and a small amount of tannins, caustic soda (sodium hydroxide), and sodium phosphate.

All surface discharge originating along the west side of Building 718 flowed into this ditch. Thirty feet to the north of Building 718 an unnamed road runs from east to west. The drainage ditch is relatively steep near the building and primarily drains to the north, where it joins a roadside drainage ditch. Some runoff in the ditch flows to the southwest, where the drainage ditch is cut off by a crushed gravel road leading southwest away from Building 718.

4.5 SEADs 43, 56, and 69: Building 606 – Old Missile Propellant Test Laboratory/ Herbicide and Pesticide Storage/ Disposal Area

SEADs-43, 56, and 69 are located in the southeastern corner of the Depot (**Figures 1 and 5**)

in property that is currently associated with the New York State Department of Correctional Services' Five Points Correctional Facility. These areas are discussed as one site because SEAD-43 and SEAD-56 both represent historic uses of Building 606; SEAD-69 is a disposal area situated close to Building 606, which was previously suspected of receiving wastes from the two other SWMUs. The entire area encompassing the three SWMUs measures roughly 900 ft. long (east-west) and 600 ft. wide (north-south).

In the 1960s, Building 606 was used as a missile propellant test laboratory; this use is designated as SEAD-43, the Old Missile Propellant Test Laboratory, which was used for quality assurance (QA) surveillance testing of military ordnance items. Operations performed reportedly involved the operational or functional testing of explosive devices. The "SWMU Classification Report, Final" (Parsons, 1994) indicates that IRFNA was used in, and stored at and near Building 606 prior to its disposal at SEAD-13. Much of the IRFNA storage occurred in a corrugated metal shed, which was exterior to and northwest of Building 606. The concrete pad was also used to aerate spill residues; thus IRFNA and/or liquid propellants from the QA laboratory may also have been released or disposed of in this area.

After 1976, Building 606 was used as a pesticide and herbicide storage and mixing facility; this historic use is designated as SEAD-56, Herbicide/Pesticide Storage. Storage of pesticides and herbicides occurred at an old building foundation that was located west of Building 606. A historic concrete underground tank was also used for the intermittent storage of wastewater generated during the rinsing of the portable truck-mounted tank that was used for mobile spraying operations at the Depot. The truck-mounted tank was rinsed between dissimilar successive pesticide and herbicide application, and the recovered wastewater was used as a diluent in successive mixing applications. In 1989 the pesticide/herbicide was

upgraded when a new rinseate building was constructed to the east of Building 606, and the historic underground rinseate storage tank was replaced with a new vaulted tank that complied with changing environmental regulations.

SEAD-69 is a disposal area in an open field that is located southeast of Building 606. It is suspected that waste from the IRFNA storage and pesticide/herbicide mixing was disposed of at SEAD-69. SEAD-69 measures approximately 100 ft. by 100 ft. in size, and contained various construction debris, including bricks and concrete blocks, that were visible at the surface.

4.6 SEAD-44A: Quality Assurance Test Laboratory

SEAD-44A is located in the southeastern portion of the Depot, approximately 1,000 ft. east of Brady Road and 1,500 ft. north of South Patrol Road (**Figures 1 and 5**) in property that is currently associated with the New York State Department of Correctional Services' Five Points Correctional Facility.

Ordnance and explosives (OE) and unexploded ordnance (UXO) removal was completed by Weston during 2001 and 2002. Once the removal was completed, soil stockpiles, which were previously screened for OE debris, were graded to allow for drainage by mounding the stockpiles. The surrounding 25 acre area was seeded.

Prior to performing any remedial actions or investigations at SEAD-44A, Building 416 was located at the site and a number of earthen berms that ran parallel to an unnamed dirt road at the site were present.

The earthen berms were historically used for QA testing of ordnance items, including various pyrotechnics, firing devices, and 40-millimeter practice and chemical smoke grenades. The above ground testing of landmines also reportedly

occurred in SEAD-44A in a separate bermed area. It is suspected that the area contains high levels of metals, cyanide, and other contaminants associated with ordnance testing. A drainage swale runs east to west along the middle of the site; this feature drains surface water runoff to the west towards Silver Creek.

4.7 SEAD-44B: Quality Assurance Test Laboratory

SEAD-44B runs along the west side of Brady Road and occupies an area that is approximately 350 ft. by 200 ft. (**Figures 1 and 5**) on property that is currently associated with the New York State Department of Correctional Services' Five Points Correctional Facility. Two buildings were originally associated with SEAD-44B. The buildings were part of a QA test area for pyrotechnics, chemical smoke grenades, and other fire devices. It is suspected that the area contains high metals and possible UXO debris.

Topographically there is a drainage ditch on the eastern border of SEAD-44B between the site and Brady Road. During a site visit in 1994, no stressed vegetation was observed and the terrain of SEAD-44B was relatively flat with the exception of two distinct earthen berms 1 to 2 ft. high.

4.8 SEAD-52: Buildings 608 and 612 – Ammunition Breakdown Area

SEAD-52 is located in the southeastern portion of SEDA (**Figures 1 and 5**). The area is characterized by developed and undeveloped land. East and west of the SWMU are grassy fields with some sparse brush. Brady Road bisects the area running from north to south.

SEAD-52 was active from the mid 1950s to the late 1990s. The area consists of four buildings: Buildings 608, 610, 611, and 612. Building 608 was previously used for the storage of ammunition magazines; Building 610 was used for ammunition

powder collection; Building 611 was used for storage of equipment, paints, and solvents; and Building 612 was used for the breakdown and maintenance of ammunition. None of these buildings are currently active or used for storage of materials. SEDA railroad tracks enter the area from the northwest and divide into two spurs that provide access to the western side of Building 609 and the northern side of Building 612. There are paved access routes to Buildings 608, 610, and 611 and paved access routes on all sides of Building 612.

The topography of SEAD-52 is relatively flat with the area to the west of Brady Road sloping gently to the west from a topographic high that is located at Building 612. Numerous drainage ditches are located to the west, north, and south of Building 612. Four ditches are located west of the building. One ditch directs runoff flow to the north where it intersects an east-west trending drainage ditch. Another ditch directs flow southwest, and two ditches direct flow to the west. A fifth ditch is located south of Building 612, and it channels runoff flow to the south where it parallels Brady Road. The area to the east of Brady Road also slopes gently to the west. A north-south trending drainage ditch is located east of Buildings 608, 610, and 611. Another drainage ditch parallels the east side of Brady Road and flows south.

4.9 SEAD-62: Nicotine Sulfate Disposal Area near Buildings 606 or 612

The Nicotine Sulfate Disposal Area (SEAD-62) is located in the southeastern portion of SEDA (**Figures 1 and 5**). It measures approximately one-half mile by one-quarter mile and is characterized by mostly undeveloped land with the exception of bunkers and buildings along the western perimeter. The undeveloped areas are predominantly low grassland in the western portion that becomes more vegetated with low brush and sparse trees in the eastern portion. The developed area along the western perimeter of the site is SEAD-52, which includes Buildings 609 and 612 and two grass

covered bunkers with paved access. Brady Road separates the buildings and bunkers. The site is bound on all sides by mostly undeveloped land. An unnamed paved road that runs between Brady Road and Building 606 near the eastern boundary of the site defines the northern boundary of the site. The fence separating the ammunition storage area from the unrestricted portion of the site generally forms the eastern boundary of the site. The ammunition storage area fence restricts access to most of the site.

The regional topography slopes gently to the west toward Brady Road. A ditch drains several wet areas in the central and south-central portions of the site; the ditch drains west through a culvert under Brady Road.

4.10 SEAD-64B: Garbage Disposal Area

The Garbage Disposal Area at SEAD-64B is located immediately north of Ovid Road near Building 2086 in the southern end of SEDA (**Figure 3**). Previously, this location was characterized by undeveloped land that was bounded by Ovid Road on the south, an unnamed paved road on the west, an intermittent stream and several sets of SEDA railroad tracks to the north, and undeveloped land with dense vegetation and deciduous trees to the east. Two large piles were observed located along the northern boundary of SEAD-64B.

SEAD-64B was used for garbage disposal from 1974 to 1979, which corresponds to a period when the Depot's solid waste incinerator was not in operation. It appears that one or two truck loads of household waste were disposed at SEAD-64B based on the size of the fill area and amount of debris observed.

The local topography of SEAD-64B is somewhat uneven, but generally slopes to the south-southwest. The intermittent stream flows west along the west-sloping regional features.

4.11 SEAD-64C: Garbage Disposal Area

The Garbage Disposal Area at SEAD-64C is located near the intersection of East Patrol Road and South Patrol Road in the southeastern corner of SEDA (**Figures 1 and 5**). The area is vegetated with grass and low brush; the vegetation is denser in the southern and western portions of the site.

Two small concrete pads are located in the southeastern portion of the site and can be accessed via a 75-foot long crushed shale road. One pad (25 ft. long by 15 ft. wide) is slightly elevated above the ground and shows little evidence of deterioration. The second pad (15 ft. square), covered with gravel and cracked in several places, is located near the southern edge of the first and is oriented approximately 25 degrees counterclockwise to it. A north-south trending chain-link fence divides the site into eastern and western portions. A small west-flowing intermittent stream bounds the site on the north. Paved roadways define the eastern and southern boundaries of the site. Topography at SEAD-64C is generally flat, sloping gently to the southwest.

4.12 SEAD-64D: Garbage Disposal Area

SEAD-64D covers an area located between West Patrol Road and the SEDA railroad tracks that are located to the west along North-South Baseline Road in the southwestern portion of SEDA (**Figures 1 and 6**). The SWMU stretches for approximately 2,700 ft. along the straight portion of West Patrol Road and is approximately 1,200 ft. wide extending east from West Patrol Road. Firebreaks are cut into the dense vegetation in the area and trend east-west and north-south.

Portions of SEAD-64D were used for garbage disposal from 1974 to 1979 when the SEDA solid waste incinerator was not in operation. The type of waste disposed at SEAD-64D was primarily household waste, although according to information contained in the "SWMU Classification Report,

Final” (Parsons, 1994) and conditions observed during test pitting, construction debris was also disposed of at SEAD-64D. Based on the size of the area and the volume of waste estimated to be present, this area was used intermittently for disposal during the referenced period (i.e., 1974 – 1979).

Several discrete disposal areas were developed at SEAD-64D, and today these areas can be identified by the surface expression of metal objects and other forms of debris. The majority of the identified disposal areas were located in the southern, south-central, and east-central portions of SEAD-64D. An elongated east-west trending mound (approximately 75 ft. long) that is located in the southern portion of the SWMU is reported to contain trash and assorted debris. Immediately to the north and east of this elongated mound are three 25-foot to 30-foot diameter depressions that are 2 to 4 ft. in depth, which were areas excavated to provide adequate cover material.

The topography of SEAD-64D slopes to the west. The regular west-sloping topography is interrupted in the south-central portion of the site by an eroded stream bed that traverses the south-central portion of the area. The intermittent stream flows west toward low areas that are located to the east of West Patrol Road. These low areas parallel to West Patrol Road are believed to collect much of the surface water run-off from the SWMU.

4.13 SEAD-67: Dump Site East of Sewage Treatment Plant No. 4

The SEAD-67 site is located in the central eastern portion of SEDA (**Figures 1 and 2**), immediately south of West Romulus Road and east of Sewage Treatment Plant No. 4. A TCRA was performed by Weston during 2002 and 2003, which included the excavation of approximately 250 cy of soil, including five waste piles and two berms. The surface soil was excavated to a depth of 12 inches, and the berms and waste piles were excavated to the

existing grade. Prior to the commencement of the TCRA, the site was cleared of vegetation. Upon completion of the removal action, site restoration was not conducted.

Before the removal action, the area was undeveloped and heavily vegetated with low brush and deciduous trees. A total of five waste soil piles and two berms were formerly staged at the SEAD-67 site. A grass covered 10-foot diameter waste soil pile and a 5-foot diameter waste soil pile were located approximately 50 ft. and 70 ft. respectively, to the south of West Romulus Road. A 10-foot diameter waste soil pile and a 60-foot long brush covered berm were located approximately 225 ft. south of the road. Two smaller waste soil piles were located to the south of the berm. All waste soil piles and berms were approximately 3 to 4 ft. high, except for the 10-foot diameter pile that was approximately 5 ft. high. The origin of the bermed areas and waste piles are unknown.

The topography of the site slopes gently to the west to an unnamed stream, which is approximately 250 ft. away from the former waste piles and berm structures. The stream is a Class C surface water body that flows north beneath West Romulus Road into a regulated wetland area. The wetland area provides tertiary treatment for the wastewater discharges from the treatment plant. Downstream of the wetland, the stream enters Kendig Creek.

4.14 SEAD-122B: Small Arms Range, Airfield Parcel

The small arms range (SAR, SEAD-122B) located on the Airfield Parcel along Route 96A was previously used by the Air Force, Navy, and Army as a small arms qualification ground. The Airfield SAR is located in the southwest corner of SEDA adjacent to the SEDA Airfield Parcel (**Figure 5**). The SAR consists of two bermed small arms ranges: one previously used for small arms training, and the second previously used for machine gun targeting.

As part of a treatability study conducted by Parsons in 2004, approximately 500 cy of soil were excavated from SEAD-122B. The excavations included excavating the floor of the range to a depth of 3 inches, the western face of the backstop berm to a depth of 2 ft. to 3 ft. below grade surface, and a drainage swale to a depth of 6 inches.

Since construction by the Air Force in the early 1950s, the size and shape of the firing lanes and berms have been modified.

The configuration of the firing lanes and berms observed during the investigations consisted of a 20-lane SAR with protective wooden baffles and a two-lane machine gun range. Each of the firing line areas were surrounded on three sides (north, east, and south) by earthen berms that measure up to 28 ft. in height. The firing line areas were suspected to contain UXO, high lead concentrations, and possibly other high metal concentrations. Underlying the firing lines within each range area was a network of footer drains that captured surface water runoff from within the firing lines and conveyed it to the open area located west of the SAR where it was discharged. The surface water and groundwater flow is anticipated to follow the general trend of the land and flow towards the west and Seneca Lake.

4.15 SEAD-122E: Plane Deicing Area

SEAD-122E is associated with the deicing of planes at three separate aircraft refueling areas in the airfield (**Figures 1 and 6**). The airfield is no longer an active airfield, and it is currently utilized by the New York State Police for training and special events. Two of the refueling areas are located near the end (west side) of the northwest-southeast runway, and the third is located at the end of a short taxiway, west of the central portion of the runway.

5 SITE INVESTIGATIONS AND STUDIES

5.1 SEAD 13: Inhibited Red-Fuming Nitric Acid Disposal Site

Site investigations performed at SEAD-13 included an Expanded Site Investigation (ESI) in 1993 and 1994, followed by a Supplemental Investigation in 2001. The ESI work included geophysical investigations, surface and subsurface soil sampling, monitoring well installations, groundwater sampling, surface water/sediment sampling, and chemical analyses. The supplemental investigation included additional soil borings (with surface and subsurface soil sampling), monitoring well installations, groundwater sampling, and chemical analysis. Complete analytical results from both investigations are presented in "Decision Document Mini Risk Assessment SEAD-13, Inhibited Red Fuming Nitric Acid (IRFNA) Disposal Area, Final" (Parsons, 2004a). A brief summary of the site investigations performed is presented below.

Surface / Subsurface Soils

Five soil borings were advanced within each of the two reported disposal areas (East and West) for a total of ten borings. Three samples were collected from each boring (one surface soil sample and two subsurface samples). Samples were analyzed for Target Compound List (TCL) volatile organic compounds (VOCs), semivolatile organic compounds (SVOCs), pesticides/polychlorinated biphenyls (PCBs), Target Analyte List (TAL) metals, cyanide, explosives, herbicides, nitrates, and fluoride.

SVOCs were found in the surface soil samples collected at SEAD-13 and were not detected at depth. In general, the concentrations of SVOCs were low, with concentrations of 4-methylphenol, benzo(a)pyrene, dibenz(a,h)anthracene, and phenol exceeding their New York State (NYS) Technical Administrative Guidance Memorandum (TAGM) #4046 cleanup objective level values in one sample.

Analytical results for the surface and subsurface samples are summarized in **Tables 1** and **2**, respectively.

One pesticide compound was detected at SEAD-13. The pesticide, 4,4'-DDE, which was found in one surface sample, SB13-2-1 (SEAD-13-East), at an estimated concentration of 3.6 µg/Kg, was below the TAGM value of 2,100 µg/Kg.

Several metals were detected in the surface and subsurface samples at SEAD-13. Thirteen metals exceeded their respective TAGM values in surface soils, and twelve metals exceeded their respective TAGM values in subsurface soils, as listed in **Tables 1** and **2**, respectively.

Groundwater

Four new wells were installed in 2001 to further delineate SEAD-13 and to replace two wells that were consistently found to be dry during the ESI. Groundwater sampling, using low-flow sampling technique, was performed in both 2001 and 2002, and the samples were analyzed for SVOCs, metals, cyanide, and nitrogen.

During the previous groundwater investigation conducted as part of the ESI in 1993 and 1994, seven monitoring wells were installed at SEAD-13: four on the east side of the Duck Pond, and three on the west side of the pond. The three wells installed on the west side were positioned to investigate rumors of a disposal area, which had not previously been identified in the geophysical investigation. The wells on the east side were installed to assess the possible groundwater contamination associated with the six or seven identified pits. Groundwater samples were collected and analyzed for VOCs, SVOCs, pesticides/PCBs, metals, cyanide, herbicides, nitrate/nitrite-nitrogen, and fluoride.

During the 2001 and 2002 sampling rounds, five SVOCs were detected in the groundwater. The

only SVOC with a criteria value, bis(2-ethylhexyl)phthalate, was detected in two samples at concentrations below its GA standard. During the ESI investigation, one SVOC, bis(2-ethylhexyl)phthalate, was detected in the groundwater twice with a maximum concentration of 23 µg/L. Both detections exceeded the GA standard of 5 µg/L. This compound was determined to be a common laboratory contaminant and is not attributed to site conditions.

Seven metals (aluminum, antimony, iron, magnesium, manganese, selenium, and sodium) were found in the groundwater samples from the 2002 sampling round at concentrations above their respective groundwater standards. Turbidity readings for the groundwater samples collected in 2002 were low, ranging in value from 1.25 Nephelometric Turbidity Units (NTUs) to 13.7 NTUs. During the 2001 sampling round, nine metals (aluminum, arsenic, chromium, iron, lead, magnesium, manganese, nickel, and sodium) were found in the groundwater samples at concentrations above their respective Class GA standard levels. The turbidity in the samples collected in 2001 was elevated, with a maximum turbidity level recorded of 999 NTUs. The elevated metal concentrations for chromium, iron, magnesium, and manganese were measured during the 2001 sampling round when turbidity was high. Lower turbidity readings in the 2002 sampling round showed a significant decrease in concentrations. In 2002, manganese was detected in a sample with the lower turbidity reading at a concentration of 397 µg/L, which is greater than the GA value of 300 µg/L. A summary of detected analytes in groundwater are presented in **Table 3** and complete analytical results are presented in the "Decision Document Mini Risk Assessment SEAD-13, Inhibited Red Fuming Nitric Acid (IRFNA) Disposal Area, Final" (Parsons, 2004a).

The groundwater samples were analyzed for nitrate/nitrite-nitrogen and fluoride, which were considered indicator compounds based on the types of materials disposed in the pits at SEAD-13.

Five of the ten groundwater samples had nitrate (expressed as nitrogen) concentrations above the criteria value of 10 mg/L. The maximum nitrate value detected was 731 mg/L in sample MW13-13, which is located downgradient from the former IRFNA pits in SEAD-13-East. The nitrite concentrations were all below the criteria value of 1 mg/L, except the concentrations detected at MW13-11 and MW13-14, which were 2.1 mg/L and 1.1 mg/L, respectively. Fluoride was detected at concentrations ranging from 0.1 mg/L to 0.45 mg/L. All of the reported fluoride concentrations were below the Class GA Standard of 1.5 mg/L.

Surface Water/Sediment

Three sediment and surface water sample sets were collected from within the Duck Pond during the ESI in 1993 to assess the potential impact of the IRFNA disposal pits on adjacent surface water bodies. Sediment and surface water samples collected during the ESI were analyzed for VOCs, SVOCs, explosives, pesticides/PCBs, herbicides, metals, cyanide, nitrate/nitrite-nitrogen, and fluoride. Surface water samples collected in 1993 exhibited unusually high aluminum concentrations. Consequently, additional samples were collected in January 2000 at sample locations SW13-4, SW13-5, and SW13-6 to confirm the presence of aluminum. In 1993, turbidity in the surface water samples collected was noted as being high. The turbidity readings associated with the follow-up sampling in 2000 were extremely low, ranging from 3 NTUs to 5.7 NTUs. The correlation between the higher turbidity and higher concentrations and the lower turbidity and lower concentrations indicate that the aluminum and iron values were consistent with the lower concentrations. However, since the set of 1993 data recorded turbidity as a sample observation and not an actual value, both sets of results were used in the Risk Assessment evaluation. In 2001, surface water samples were collected at five of the six surface sample locations adjacent to SEAD-13 (SW13-1, SW13-2, SW13-3, SW13-4, and SW13-5), and sediment samples were collected at

all six locations. Surface water and sediment samples were analyzed for SVOCs, metals, cyanide, and nitrate/nitrite-nitrogen. A summary of surface water and sediment results are presented in **Tables 4** and **5**, respectively.

Nitrate/nitrite-nitrogen was detected in six out of nine of the surface water samples at SEAD-13, with concentrations ranging from 0.02 mg/L to 0.11 J mg/L. The maximum concentration, 0.11 J mg/L, was found in sample SW13-5 near the point of groundwater discharge to the pond. Fluoride was also detected in the surface water samples. The reported concentrations ranged from 0.27 mg/L to 0.39 mg/L. There are no surface water standards for nitrate/nitrite-nitrogen or fluoride.

Twenty-two metals were detected in the sediment samples collected at SEAD-13. Of these, cadmium, chromium, copper, iron, lead, manganese, nickel, and sodium were detected at concentrations greater than the NYS Lowest Effect Level guidance values for sediment. Cadmium exceeded the criteria (0.6 mg/Kg) in five samples, with a maximum detection estimated at 0.96 mg/Kg at SD13-4. Nickel was detected in all ten sediment samples at concentrations that exceeded the criteria level of 16 mg/Kg, with a maximum concentration of nickel of 35.4 mg/Kg in sample SD13-4. Sodium was detected at concentrations that exceeded its criteria (1 mg/Kg) in four samples. The maximum concentration estimated at 326 J mg/Kg was found at sample location SD13-4. The manganese criterion of 460 mg/Kg was exceeded in three samples. The maximum concentration of manganese, 778 mg/Kg, was detected in sample SD13-3. The chromium criterion, 26 mg/Kg, was exceeded in three sediment samples, with a maximum concentration, 27.7 mg/Kg, detected at SD13-4. The copper criteria of 16 mg/Kg was exceeded in all ten samples, with the maximum concentration of 20.7 mg/Kg detected in SD13-4. The iron criteria of 20,000 mg/Kg was exceeded in nine of the ten sediment samples collected, with the

maximum concentration of 29,400 mg/Kg detected in sample SD13-4.

SVOC concentrations in sediment did not exceed the NYS Sediment Criteria for Benthic Aquatic Life Chronic Toxicity, with the exception of 4-methylphenol at SD13-4. The sediment results are presented in **Table 5**.

Nitrate/nitrite-nitrogen was detected in seven of the ten sediment samples analyzed. The maximum concentration detected was 6.4 J mg/Kg in sample SD13-6. Fluoride was detected in all four of the sediment samples analyzed for fluoride. The reported concentrations ranged from 188 mg/Kg to 270 mg/Kg.

5.2 SEAD 39: Building 121 Boiler Blowdown Leach Pit

Site work performed at SEAD-39 included a Limited Sampling Program (LSP) and a TCRA, which included confirmatory sampling. The results of the investigations are summarized and presented below.

Time Critical Removal Action - 2003

A total of 34 tons of soil were excavated at SEAD-39 to a depth of 1-foot by Weston in August 2003. Building 121 and two paved roads helped define and limit the border of the excavation. Following the excavation, eight soil samples were collected for analysis. Analytical results showed elevated concentrations of one or more parameters [Polycyclic Aromatic Hydrocarbons (PAHs), arsenic, barium, and/or silver]. The areas where the highest concentrations were detected were further delineated in October 2003 by collecting eight additional soil samples to determine the required extent of further excavation.

The average concentrations of PAHs in post-excavation and delineation samples showed that PAH levels in soil had been significantly reduced

but were still above the recommended soil cleanup criteria. PAH concentrations in all of the post-excavation and delineation samples exceeded their respective individual TAGM values. Carcinogenic PAH (cPAH) concentrations were compared to NYSDEC's recommended screening level of 10 mg/Kg benzo(a)pyrene toxicity equivalent (BTE). The BTE value calculation is based on the relative toxicity of the individual cPAHs, as cited by USEPA Integrated Risk Information System (IRIS) database. An evaluation of the BTE at each sample indicated that the average BTE value was 11 mg/Kg. The overall average was heavily biased by a single BTE value of over 121 mg/Kg (SEAD39-PX-SS-003), which was collected from a location near the boiler house blowdown release point in the shallow soils (0–6 inches). This soil included soil and topsoil that was used to regrade the area after the boiler blowdown was connected to the sewer, and is not believed to be associated with the historic release. Without this value, the overall average BTE falls to 3.8 mg/Kg. The deeper sample collected from this same location had a BTE value of 20 mg/Kg. Results of the remainder of the confirmatory sampling points indicated that NYSDEC's suggested screening level of 10 mg/Kg BTE was not exceeded at depths greater than 6 inches, or beyond 5 ft., of the initial post-excavation sample collected at this location.

The target metal mercury was detected above the recommended soil cleanup criteria of 0.13 mg/Kg in two samples, which represent one sample location (SEAD39-PX-SS-004), with a maximum detection of 1 mg/Kg. Although exceedances were detected, the site-wide average for mercury (0.13 mg/Kg) did not exceed the recommended cleanup criteria of 0.13 mg/Kg for this compound. The average concentrations of other metals detected at the site were at levels consistent with SEDA site-wide background data. A summary of the confirmatory and delineation samples are presented in **Table 6**. Complete analytical results for the samples collected can be found in "VOC Sites – SEADs 39 and 40 Time-Critical Removal Action" (Weston,

2004a). Based on the confirmatory and delineation samples, it was determined that further excavation would not be necessary at SEAD-39.

Limited Sampling Program – 1993/94

A LSP was performed at SEAD-39 to obtain evidence of a release. One soil boring was advanced to a depth of 5.7 ft. below ground surface (bgs), with a soil sample collected directly above the water table (3 ft. to 5 ft. bgs) for chemical analysis for Total Petroleum Hydrocarbons (TPH). Four surface soil samples were also collected in the area surrounding the soil boring.

TPH was detected below the 100 ppm soil standard in all samples collected with the exception of one, which had a level of 118 ppm. It could not be determined if the contaminants were a result of boiler blowdown liquids being released or if TPH was from other sources. Analytical results for the samples can be found in the “Action Memorandum and Decision Document, Time-Critical Removal Actions, Three VOC Sites, Final” (Parsons, 2002b).

5.3 SEAD-40: Building 319 Boiler Blowdown Leach Pit

The investigative work at SEAD-40 included a LSP in 1993 and 1994 followed by a TCRA conducted in 2002 and 2003. The results of the investigations are summarized and presented below.

Time Critical Removal Action – 2003

Approximately 39 tons of soil were removed from SEAD-40 by Weston in August 2003. The impacted soil was excavated at one section to a depth of 1 ft. bgs and at another section to a depth of 6 ft. bgs. The excavation was limited in size by railroad tracks to the north and a parking lot to the south. Eighteen post-excavation samples were analyzed for VOCs, PAHs, and metals. Elevated levels of PAHs and non-target metals (arsenic, barium, and/or chromium) were reported. Subsequently, 29

delineation samples were collected in October 2003 to evaluate the need for further excavation at the site.

Based on the analytical results of the post-excavation and delineation samples, it was determined that the concentrations of PAH contaminants had been significantly reduced at SEAD-40; however, there were some results that exceeded the recommended soil cleanup objective criteria. An evaluation of the BTE values for each sample indicated that the average BTE value found at SEAD-40 was 7.3 ppm, with values ranging from a low of 0.067 ppm to a high of 48 ppm. BTE values were detected at levels greater than NYSDEC’s recommended 10 ppm level in ten of the 47 samples. All of the samples where the BTE values were greater than 10 ppm were collected from four locations (SEAD40-PX-SS-006, SEAD40-PX-SS-007, SEAD40-PX-SS-012, and SEAD40-PX-SS-013), all of which were located on the edge of the excavations, beyond the limits of the drainage channel where the boiler blowdown was previously discharged.

Results of the additional delineation sampling conducted in October 2003 at these locations indicated that BTE concentrations were greater than the recommended 10 ppm screening value in samples collected from 12 inches bgs (i.e., 6 inches deeper than the original confirmatory sample) at sample locations PX-SS-012 and PX-SS-013; however, results from samples collected at depths of 6 and 12 inches bgs at sampling points moved 5 ft. out from the excavation at locations PX-SS-012 and PX-SS-013 indicated levels below the 10 ppm BTE value. This suggests that the lateral spread of PAHs in the direction of the nearby railroad tracks is limited. Results of the additional delineation sampling conducted on the other side of the drainage ditch indicated that BTE concentrations were less than the 10 ppm value in samples collected beneath the original confirmation sample (i.e., at a depth of 12 inches bgs at the original perimeter location). However, additional delineation

samples collected 5 ft. away from the original perimeter sample locations, PX-SS-006 and PX-SS-007 (at depths of 6 and 12 inches bgs) indicated that concentrations in excess of the 10 ppm BTE value were present. This suggests that runoff from the adjacent parking area, which is not a CERCLA release, is contributing to the elevated levels observed in this area.

The site-wide average concentration of metals at the site were also below the cleanup criteria. A summary of the confirmation and delineation samples can be found in **Table 7**. Analytical results for the samples collected were reported in "VOC Sites – SEADs 39 and 40 Time-Critical Removal Action" (Weston, 2004a). It was determined based on the confirmation and delineation samples that further excavation would not be necessary at SEAD-40.

Limited Sampling Program – 1993/1994

Potential evidence of a release at SEAD-40 was evaluated with a LSP in 1993 and 1994. One soil boring was advanced in the ditch near the mouth of the drainage pipe to a depth of 5.8 ft. bgs, and one sample was collected from a depth of 4-6 ft. bgs. Four surface soil samples were also collected at the site. One surface sample was collected at the mouth of the drainage pipe near the 6 ft. boring, another was collected between Building 319 and the drainage ditch, and the remaining two were collected in the drainage ditch approximately 50 ft. and 100 ft. downstream of the mouth of the discharge pipe. All samples were submitted for chemical analyses and analyzed for TPH and pH.

TPH was detected in all samples collected at SEAD-40, with concentrations ranging from 270 mg/Kg to 1,640 mg/Kg. The second highest detection of TPH, 1,270 mg/Kg, was found at the sample collected at a depth interval of 4 to 6 ft. Complete analytical results for the samples can be found in the "Action Memorandum and Decision

Document, Time-Critical Removal Actions, Three VOC Sites, Final" (Parsons, 2002b).

5.4 SEAD-41: Building 718 Boiler Blowdown Leaching Pit

Work performed at SEAD-41 included a LSP conducted in 1993/1994, followed by a TCRA conducted in 2000. The results of these activities are summarized below.

Time Critical Removal Action - 2000

A TCRA was conducted at SEAD-41 in 2000 by the Army to remove the petroleum-contaminated soils identified during the LSP. Approximately 5 cy of soil were removed as part of the TCRA. Soil samples were collected along the extent of the excavation area and analyzed for VOCs by USEPA Method SW-846 8021 and SVOCs by USEPA Method SW-846 8270 to confirm that site cleanup goals were achieved, and the area was refilled with clean fill. **Table 8** summarizes the TCRA soil analytical results. The excavated soil was transported to another location within the Depot for use in a low temperature thermal desorption study at the SEDA.

Limited Sampling Program – 1993/1994

One soil boring was advanced in the drainage ditch immediately to the west of the location where blowdown liquids were suspected to have been discharged from Building 718. The boring was terminated in weathered bedrock at refusal, 6.3 ft. bgs. The water table was encountered 4.0 ft. bgs. No VOCs were detected with the field screening instrument, and no stained soil was observed. The sample collected from immediately above the water table (2-4 ft. bgs) was submitted to the lab for chemical analysis. A second soil sample collected from the 0-2 ft. bgs interval at the same location was also submitted for analyses. Three additional shallow soil samples were also collected from the interval of 0 to 2 ft. bgs at other locations along the base of the drainage ditch. The samples were

analyzed for pH by SW-846 Method 9045 and TRPH by USEPA Method 418.1.

Petroleum hydrocarbons were detected in all of the soil samples collected from SEAD-41. TRPH detected in the surface soil samples ranged from 40 to 300 ppm. The subsurface soil sample contained 66 ppm TRPH. The pH of the soil samples ranged from 8.19 to 8.74.

The detection of petroleum hydrocarbons in all of the samples indicated that a release did occur. The surface samples collected nearest the point where the blowdown liquids were suspected of being discharged contained the greatest concentration of petroleum hydrocarbons. The sampling program delineated the extent of petroleum-impacted soil to an area approximately 40 ft. long by 3 ft. wide.

5.5 SEADs 43, 56, and 69: Building 606 – Old Missile Propellant Test Laboratory/ Herbicide and Pesticide Storage/ Disposal Area

A summary of the subsurface soil, groundwater, surface water, and sediment results can be found in **Tables 9** through **12**. Complete analytical results for the samples collected can be found in “The Completion Report for Six Areas of Concern – SEADs (43, 56, 69), 44A, 44B, 52, 62 and 120B, Final” (Parsons, 2001b).

Field investigations were conducted at SEADs 43, 56, and 69 in February of 1994 as part of the “ESI for Eight Moderately Low Priority AOCs” (Parsons–, 1995a).

Test Pits

Three test pits were excavated at SEAD-69 in areas with distinct EM-31 geophysical anomalies and in areas with debris on the ground. The test pits revealed the presence of buried bricks, concrete blocks, construction debris, and piping. No impacted soil or obvious contamination was

observed in the three test pits investigated. Soil samples from the investigated test pits were not submitted for analysis.

Surface/Subsurface Soil

Ten soil borings were drilled at SEADs-43, 56, and 69; three at SEAD-56, three at SEAD-69, and four at SEAD-43. A total of 30 samples were collected from these ten borings and were submitted for chemical analysis. A summary of soil results is presented in **Table 9**.

Five VOCs were detected in 10 of the 30 soil samples collected at SEADs-43, 56, and 69. All VOCs were found at concentrations below their respective TAGM cleanup objective level values.

Twenty-one SVOCs were detected at varying concentrations in the soil samples collected at SEAD-43, 56, and 69. Six carcinogenic PAHs (benzo(a)anthracene, chrysene, benzo(a)pyrene, dibenz(a,h)anthracene, benzo(b)fluoranthene, and benzo(k)fluoranthene) were detected at concentrations that exceeded their respective TAGM cleanup objective level values. All of the TAGM exceedances for these compounds were limited to three soil samples: SB43-3-00, SB43-4.01 and SB43-4.02. The highest concentrations of the PAHs found above TAGM values, as well as the highest concentrations for 12 of the 15 remaining SVOCs detected at SEADs 43, 56, and 69, were found in soil sample SB43-4.02.

Two pesticides (endosulfan I and alpha-chlordane) were detected in two of the soil samples collected at SEADs-43, 56 and 69 at levels below their respective TAGM values.

Eleven metals were detected in one or more samples at concentrations that exceeded their respective TAGM cleanup objective level values. The occurrences of TAGM exceedances were distributed throughout the 30 soil samples collected at SEADs 43, 56, and 69. Zinc exceeded its TAGM

value of 110 mg/Kg in ten samples, with a maximum detection of 338 mg/Kg. Aluminum, calcium, iron, magnesium, nickel, and potassium are nutrients commonly found in the soils at SEDA; historically, these metals are not considered to be contaminants of concern. All other metals that exceeded their respective TAGM cleanup objective level values were detected at concentrations nominally greater than their TAGM values.

Cyanide was detected in one sample. A trace amount of cyanide (1.7 mg/Kg) was found in soil sample SB56-3-04.

Nitrate/nitrite-nitrogen was detected in 83% of the soil samples collected at SEADs-43, 56, and 69. Concentrations ranged from a low of 0.02 mg/Kg in sample SB56-3-00 to a high of 9.7 mg/Kg in sample SB69-1-00.

Groundwater

Four groundwater monitoring wells were installed in the vicinity of SEADs-43, 56, and 69. One monitoring well (MW43-1) was installed upgradient, along the eastern boundary of SEADs-43, 56, and 69 to obtain background water quality data. The remaining three monitoring wells were installed downgradient of the individual SEADs, in a linear fashion along the southwestern side of each area of concern being investigated.

One herbicide, 2,4,5-TP (silvex), was detected at a concentration of 0.44 µg/L in the groundwater sample collected from monitoring well MW43-3. This concentration is slightly above the New York Class GA groundwater criteria of 0.26 µg/L.

Twenty metals were detected in the groundwater at SEADs-43, 56, and 69, shown in **Table 10**. Aluminum, iron, and manganese were detected at concentrations greater than their respective groundwater standards in all four samples. Thallium was detected once at a concentration (2.2

J µg/L) above its Maximum Contaminant Level (MCL) value of 2 µg/L.

The groundwater samples were analyzed for nitrate/nitrite-nitrogen. Concentrations of 0.06 mg/L, 0.03 mg/L, and 0.02 mg/L were reported in samples MW43-1, MW43-1 and MW43-4, respectively. No indicator compounds were detected in groundwater sample MW43-2.

Surface Water

Five surface water and sediment samples were collected from drainage swales located within SEADs-43, 56, and 69. Of these samples, one was collected from the drainage swale located upgradient of the site, two samples were collected downgradient of SEAD-43 and SEAD-56 following both possible drainage directions (northwest and southwest). The final sample was collected downgradient of SEAD-69, the suspected disposal area for Building 606. A duplicate sample was also collected from this location. All surface water and sediment samples were submitted for chemical analysis.

Two SVOCs were found in the surface water collected at SEADs-43, 56, and 69, and one SVOC, bis(2-ethylhexyl)phthalate, was detected at a concentration of 150 µg/L, which is greater than its NYSDEC Ambient Water Quality Standards (AWQS) for Class C surface water standard of 0.6 µg/L (**Table 11**).

A total of 17 metals were detected in the surface water samples collected at SEADs-43, 56, and 69. Four metals (aluminum, iron, nickel, and zinc) exceeded their AWQS Class C standards in one or more of the five surface water samples collected. The highest concentrations of aluminum (1,190 µg/L) and iron (1,750 µg/L) were detected in sample SW43-1. The highest concentrations of nickel (277 µg/L) and zinc (1,040 µg/L) were found in surface

water sample SW43-4. All other detected metals were below their respective criteria values.

Nitrate/nitrite-nitrogen was detected in all five of the surface water samples analyzed from SEADs-43, 56, and 69. The reported concentrations of nitrate/nitrite-nitrogen ranged from a low of 0.01 mg/L in sample SW43-1 to a high of 1.42 mg/L in SW43-3.

Sediment

Five sediment samples were collected as part of the investigation at SEADs-43, 56, and 69. Acetone and 2-butanone were the only VOCs detected in the five sediment samples collected at SEADs-43, 56, and 69. These VOCs are common laboratory contaminants.

Three herbicides were detected in the sediment samples collected at SEADs-43, 56, and 69. Three herbicides, 2,4,5-T, 2,4-DB, and MCP, were all found in sample SD43-2 at concentrations of 18 µg/Kg, 110 µg/Kg, and 17,000 µg/Kg, respectively (**Table 12**). These were the highest concentrations of 2,4-DB and MCP detected in the sediments at SEADs-43, 56, and 69. The maximum concentration of 2,4,5-T, 23 µg/Kg, was detected in sample SD43-3.

A total of 22 metals were detected in the sediment samples collected as part of the SEADs-43, 56, and 69 investigations. Arsenic, cadmium, chromium, copper, iron, manganese, nickel, and zinc were detected at concentrations exceeding their respective sediment criteria values. Except for zinc, the highest concentrations for the eight metals found above criteria values occurred in sample SD43-1. The highest reported concentration of zinc (178 µg/Kg) was detected in sediment sample SD43-5.

The analysis for explosives by USEPA Method 8330 detected HMX in two of the five sediment samples collected at SEADs-43, 56, and 69. The concentrations in sediment samples SD43-2 and

SD43-4 were 110 µg/Kg and 72 µg/Kg, respectively. Nitrate/nitrite-nitrogen was detected in four of the five sediment samples. Concentrations ranged from 0.03 µg/Kg to 0.15 µg/Kg. The maximum concentration was found in sample SD43-3.

5.6 SEAD-44A: Quality Assurance Test Laboratory

Site investigations at SEAD-44A included a LSP in 1993 and 1994, followed by a TCRA in 2000 and 2002. A brief summary of the site investigations performed is presented below.

Time Critical Removal Action – 2000/2002

Between 2000 and 2002 three separate contractors, EODT, Parsons, and Weston Solutions, Inc., performed a site-wide UXO and OE clearance and removal and soil remediation at SEAD-44A. This UXO removal action was performed using heavy equipment to remove the top 2 ft. of soil from the entire 25-acre site, followed by sifting it to remove all pieces greater than 1-inch in size. The goal of this effort was to separate the UXO and OE related items from the surface soil and berm soil. The total volume of soil removed from the ground surface and bermed areas equaled 27,000 yards of material. This soil was processed through a vibratory screen that separated the oversized material that was greater than 1-inch from the surrounding soil.

After the OE contaminated soil was removed from the area and stockpiled on-site, Parsons performed a geophysical survey across 55% of the 25-acre site to locate and investigate any subsurface anomalies that remained after the 0-2 foot soil removal. The geophysical survey was used to assess whether all of the UXO and OE related items had been recovered during the initial soil removal effort. This geophysical mapping effort resulted in 1,588 geophysical anomalies being investigated and five UXO items being recovered from the area surveyed after the initial soil removal.

The soil removal and screening effort was continued the following year by Weston Solutions Inc. and resulted in the entire 18,750 yards of material EODT removed being re-processed down to >1-inch. Weston Solutions, Inc. then removed an additional 8,250 yards of material from a 1-foot soil removal outside the bermed area. This recovery effort removed an additional 12 OE items from the top 1-foot of material and 10 OE items from the remaining mapped area of 1-foot removal. Documentation of the work performed by EODT and Weston Solutions, Inc. can be found in the document "UXO and Soil Remediation Area 44-A Final Report" (Weston, 2003b).

Limited Sampling Program – 1993/1994

Potential evidence of a release at SEAD-44A was evaluated with a LSP in 1993 and 1994. Nine excavations were performed at the three earthen berms, with three samples collected from each berm. Two surface soil samples were collected at various points around each of the three berms from a depth of 0-2 inches. Three groundwater monitoring wells were installed; one upgradient of the site and the other two downgradient of the berms. Four surface water and sediment samples were collected from the drainage swale that runs east-west across the site. All samples were submitted for chemical analysis of TCL VOC, SVOC, pesticides/PCBs, TAL metals, and cyanide according to NYSDEC Contract Laboratory Protocol (CLP) Statement of Work (SOW), explosives by Method 8330, and nitrates by Method 353.2. Complete analytical results for the samples collected can be found in the "Expanded Site Investigation – Eight moderately Low Priority AOCs - SEADs 5,9,12 (A and B), (43, 56, 69), 44 (A and B), 50, 58, and 59" (Parsons, 1995a).

Surface/Subsurface Soil

The analytical results for the 15 soil samples collected as part of the SEAD-44A investigation are presented in **Table 13**. The following is a summary

of the nature and extent of the soil contamination SEAD-44A.

Detected analytes did not exceed their TAGMs in surface soil and were generally low in concentration. The subsurface samples from the berm showed TAGM exceedances for benzo(a)anthracene, chrysene, benzo(a)pyrene, and dibenz(a,h)anthracene. Benzo(a)pyrene was detected in all nine berm excavation samples, with a maximum detection of 1,100 µg/Kg. Benz(a)anthracene, chrysene, and dibenz(a,h)anthracene were found at concentrations that were 2 to 11 times the TAGM value.

Nine pesticide compounds were detected in the 15 soil samples collected during the LSP at concentrations below their respective TAGM values.

Twenty-one metal compounds were detected in the 15 soil samples submitted as part of the LSP. Of the 21 metals reported, 15 were found in one or more of the samples at concentrations greater than two times their TAGM values. Antimony and magnesium were detected at concentrations three times greater than their TAGM value.

One nitroaromatic compound, 2,4,6- trinitrotoluene, was detected in one soil sample at a concentration of 110 J µg/Kg. There is no TAGM value for 2,4,6 – TNT.

Groundwater

Two VOCs, acetone and 1,1,2,2-tetrachloroethane, were detected in groundwater at concentrations below the GA standard.

Nineteen metals were detected in the groundwater, and three metals (aluminum, iron, and manganese) exceeded their groundwater standards. Iron was detected in MW44A-2 at a concentration of 4,810 µg/L; this elevated concentration of iron has been associated with the elevated turbidity in the

sample (693 NTUs). Groundwater sample results are presented in **Table 14**.

Surface Water / Sediments

Surface water results indicate that the unnamed drainage swale within SEAD-44A has not been significantly impacted by contaminants. Only aluminum, iron, nickel and zinc were detected at concentrations above the designated NYS Class C surface water criteria value. Surface water results are presented in **Table 15**.

Two SVOCs were detected in the sediment at concentrations below their sediment criteria (**Table 16**). Twenty one metals were detected in the sediment at SEAD-44A; of the metals detected, copper, iron, manganese, and nickel were detected at concentrations that exceeded the NYSDEC Sediment Criteria.

5.7 SEAD-44B: Quality Assurance Test Laboratory

The investigative work at SEAD-44B included an ESI in 1993 and 1994. The results of the investigation are summarized and presented below.

During the ESI, three surface soil samples were collected from a depth of 0-2 inches. One sample was collected to the west (downgradient) of the concrete pad and flagpole. A second sample was collected in the southwestern portion of SEAD-44B, immediately downgradient of several small piles observed on the ground surface. The last soil sample was collected to the west (downgradient) of the metal building located on the property. Three groundwater-monitoring wells were installed at SEAD-44B. One monitoring well (MW44B-1) was installed on the other side of East Brady Road, upgradient of the concrete slab and metal building associated with SEAD-44B to obtain back groundwater quality data. The two remaining monitoring wells were installed downgradient of the concrete slab and the metal building along the

western boundary of SEAD 44-B. One groundwater sample was collected from each of the three monitoring wells and submitted for chemical analysis. Two surface water and sediment samples were collected from SEAD-44B for chemical analysis. Each of the two samples were located within the drainage ditch, which runs parallel to Brady Road along the eastern boundary of SEAD-44B. All of the samples were analyzed for TCL VOCs, SVOCs, pesticide/PCBs, TAL metals, and cyanide according to NYSDEC CLP SOW, and explosives by Method 353.2.

A summary of the surface soil, groundwater, surface water, and sediment are presented in **Tables 17 to 20**, respectively. Complete analytical results for the samples collected can be found in "Decision Document – Mini Risk Assessment SEAD 9, 27, 28, 32, 33, 34, 43, 44A, 44B, 52, 56, 58, 62, 64A, 64B, 64C, 64D, 66, 68, 69, 70, and 120B, Final" (Parsons, 2002c).

Surface/Subsurface Soil

Two VOCs, acetone and 2-butanone, were detected in the soil samples collected at SEAD-44B (**Table 17**). Acetone and 2-butanone are common laboratory contaminants. Both contaminants were detected at concentrations below the respective TAGM cleanup objective level values.

Thirteen SVOCs were detected at varying concentrations in two of the three surface soil samples. Of the 13 SVOCs detected, two carcinogenic PAHs, benzo(a)pyrene and dibenz(a,h)anthracene, exceeded their respective TAGM values. The maximum detections of benzo(a)pyrene and dibenz(a,h)anthracene were both found in surface soil sample SS44B-3 at concentrations of 98 J $\mu\text{g}/\text{Kg}$ and 28 J $\mu\text{g}/\text{Kg}$, respectively.

Five pesticides were detected with a frequency of detection of 33%. One pesticide, dieldrin, exceeded

its TAGM value of 44 µg/Kg with a concentration of 57 µg/Kg.

Twenty metals were detected in the surface soils, and three metals (arsenic, lead, and zinc) were found at concentrations above their associated TAGM values at SEAD-44B. Arsenic was detected at a maximum concentration of 13.1 mg/Kg, which is above its TAGM value of 8.2 mg/Kg. Lead was detected in a single soil sample SS44B-1 at a concentration of 39.5 mg/Kg, exceeding the TAGM value of 24.4 mg/Kg. Zinc was detected in sample SS44B-1 at a concentration of 145 mg/Kg, slightly above the TAGM value of 110 mg/Kg.

Nitrate/nitrite-nitrogen was detected in all three surface soil samples collected. Concentrations ranged from a low 0.04 mg/Kg to a maximum of 0.47 mg/Kg in sample SS44B-1.

Groundwater

Sixteen metals were detected in the groundwater samples collected and submitted for analysis at SEAD-44B (**Table 18**). Aluminum, iron, manganese, and thallium were detected at concentrations above their respective groundwater standards. Aluminum was detected in all three samples collected at concentrations exceeding its Secondary Drinking Water Regulation level (50 µg/L). Manganese was found in two of the wells at concentrations exceeding its Secondary Drinking Water criteria level. Iron was found at concentrations above the NY AWQS Class GA criteria value of 300 µg/L in two of the samples collected. Thallium was found at a level of 4.7 µg/L in the sample collected from well MW44B-3, which is roughly twice its MCL criteria or 2 µg/L.

Surface Water

No VOCs, SVOCs, pesticides/PCBs, or cyanide were detected in the surface water. Thirteen metals were detected in the surface water samples

analyzed from SEAD-44B (**Table 19**). All reported concentrations of aluminum, arsenic, copper, iron, mercury, nickel, and zinc were below the NYSDEC AWQS Class C surface water values. No criteria exist for the remaining six metals (barium, calcium, magnesium, manganese, potassium, and sodium) detected in surface water at SEAD-44B.

Nitrate/nitrite-nitrogen compounds were detected in one of the two samples at a concentration of 0.01 mg/L. Currently, no criteria exist for nitrate/nitrite-nitrogen in NY Class C surface water.

Sediment

Two sediment samples were collected as part of the SEAD-44B investigation; the results are presented in **Table 20**. The only VOC detected in the sediment samples collected at SEAD-44B was 2-butanone.

One SVOC, di-n-butylphthalate, was detected in both sediment samples collected at SEAD-44B, with a maximum concentration of 110 µg/Kg. Currently no sediment criteria exist for di-n-butylphthalate.

Twenty metals were detected in the sediment samples collected at SEAD-44B. Five metals (arsenic, copper, iron, manganese, and nickel) were detected at concentrations that exceeded the NYSDEC sediment criteria. The maximum concentration of arsenic was 58.3 mg/Kg, which was over 9 times the sediment criteria value of 6 mg/Kg. The remaining metals, copper, iron, manganese and nickel, were detected in excess of the NYSDEC Sediment Criteria Value for Aquatic Life. The concentrations of the remaining metals detected above their criteria were only slightly above their associated sediment criteria established by NYSDEC.

Nitrate/nitrite-nitrogen compounds were detected in the both sediment samples at concentrations of 0.03 mg/Kg and 0.06 mg/Kg.

5.8 SEAD-52: Buildings 608 and 612 – Ammunition Breakdown Area

The field investigation at SEAD-52 included a LSP that focused on soil sampling that was performed in 1993. Complete analytical results from the LSP investigations are presented in “Decision Document – Mini Risk Assessment SEAD 9, 27, 28, 32, 33, 34, 43, 44A, 44B, 52, 56, 58, 62, 64A, 64B, 64C, 64D, 66, 68, 69, 70, and 120B, Final” (Parsons, 2002c).

A LSP was performed in 1993 to evaluate the presence of explosives in the soil at SEAD-52. Eighteen surface soil samples (plus one duplicate sample) were collected from a depth of 0 to 2 inches bgs, and the samples were chemically analyzed for explosives by USEPA Method 8330.

Results of the soil samples are summarized in **Table 21**. The results of the investigation indicated that three explosive compounds were detected in one or more of the collected soil samples. One compound, 2,4-dinitrotoluene, was detected in ten of the surface soil samples. Surface soil samples collected from the buildings on the east side of Brady Road were generally free of all explosive compounds, with the exception of two samples with detections of 2,4-dinitrotoluene.

All but two of the surface soil samples collected around Building 612 contained explosive compounds. The compound 2,4-dinitrotoluene was most frequently detected (found in 10 of the 18 samples), and concentrations measured for 2,4-dinitrotoluene ranged from estimated levels of 91 J $\mu\text{g}/\text{Kg}$ to 2,100 J $\mu\text{g}/\text{Kg}$. The other two explosives found (tetryl and 2,4,6-trinitrotoluene) were detected in one or two soil samples around Building 612. No TAGM soil cleanup objective values exist for the explosive compounds detected.

5.9 SEAD-62: Nicotine Sulfate Disposal Area near Buildings 606 or 612

The field investigation at SEAD-62 included an ESI that was performed in 1994. Complete analytical results from the ESI are presented in “Decision Document – Mini Risk Assessment SEAD 9, 27, 28, 32, 33, 34, 43, 44A, 44B, 52, 56, 58, 62, 64A, 64B, 64C, 64D, 66, 68, 69, 70, and 120B, Final” (Parsons, 2002c).

Three soil samples and three groundwater samples were collected from SEAD-62 and submitted for chemical analysis. All the samples were analyzed for the following: TCL VOCs, SVOCs, pesticides/PCBs, TAL metals, and cyanide according to the NYSDEC CLP SOW, and herbicides by Method 8150. Summaries of the soil and groundwater results are presented in **Table 22** and **23**, respectively.

Soil

Two SVOCs, fluoranthene and pyrene, were detected in one soil sample at concentrations below their respective TAGM cleanup objective level values. Two herbicides, 2,4,5-T and dicamba, were detected in the soil; however, neither compound exceeded its respective TAGM value.

The soil samples collected at SEAD-62 were found to contain various metals at concentrations that exceeded their associated TAGM cleanup objective values (**Table 22**). Of the 20 metals detected at SEAD-62 soils, four metals (arsenic, mercury, potassium, and zinc) were found in one or more samples at concentrations above their associated TAGM value; however, the exceedances were within the same order of magnitude as their respective TAGM value.

Groundwater

One VOC, benzene, was detected in the groundwater samples collected at SEAD-62 (**Table**

23). Benzene was detected in two samples at concentrations of 2 J $\mu\text{g/L}$, which exceeded its GA standard of 1 $\mu\text{g/L}$.

Sixteen metals were detected in the groundwater samples collected at SEAD-62, and four metals exceeded their respective groundwater standards. Aluminum, iron, and manganese were detected in each of the three sampled wells at concentrations exceeding their respective groundwater comparative criteria. Thallium was detected in one sample at a concentration of 2.4 $\mu\text{g/L}$, which is greater than its MCL of 2 $\mu\text{g/L}$.

5.10 SEAD-64B: Garbage Disposal Area

The field investigation at SEAD-64B included an ESI performed in 1994. Complete analytical results from the investigation are presented in "Decision Document – Mini Risk Assessment SEAD 9, 27, 28, 32, 33, 34, 43, 44A, 44B, 52, 56, 58, 62, 64A, 64B, 64C, 64D, 66, 68, 69, 70, and 120B, Final" (Parsons, 2002).

Soil

A total of three soil borings were installed at SEAD-64B during the ESI. Locations were based on geophysical surveys that were performed to delineate the boundary of the disposal area. Soil samples were collected at three depths at each boring location, as well as at one monitoring well, and they were analyzed for TCL VOCs, SVOCs, pesticides/PCBs, TAL metals, and cyanide according to the NYSDEC CLP SOW.

The results of the soil samples are summarized in **Table 24**. VOCs, SVOCs, pesticides, and metals were detected in the soils. One metal, magnesium, exceeded its TAGM cleanup value in one sample. All other parameters were detected below their respective TAGM values.

Groundwater

Three monitoring wells, including one upgradient (background) well, were installed and sampled at SEAD-64B. Aluminum and manganese exceeded their respective Secondary Drinking Water Regulation levels in every sample with maximum concentrations of 1,530 $\mu\text{g/L}$ and 559 $\mu\text{g/L}$, respectively. Iron exceeded the GA standard twice, with a maximum concentration of 5,090 $\mu\text{g/L}$. The higher concentration measured for each of these metals was found in the sample collected from MW64B-3, located furthest to the north and closest to the railroad tracks. The results of the groundwater samples are summarized in **Table 25**.

Surface Water/Sediment

Three surface water and three sediment samples were collected from SEAD-64B. All three sample sets were collected from the drainage ditch that flows to the west along the northern perimeter of this site.

Aluminum and iron exceeded their NYS AWQS criteria in one sample at concentrations barely above their respective criteria values, as shown on **Table 26**.

Three pesticides (4,4'-DDE, endosulfan I, and heptachlor) exceeded their sediment criteria in one sample. Arsenic, copper, iron, manganese, mercury, and nickel were detected at concentrations exceeding criteria in one or more of the sediment samples. The analytical results for sediment are summarized in **Table 27**.

5.11 SEAD-64C: Garbage Disposal Area

The field investigation at SEAD-64C included an ESI that was performed in 1994. Complete analytical results from the ESI are presented in "Decision Document – Mini Risk Assessment SEAD 9, 27, 28, 32, 33, 34, 43, 44A, 44B, 52, 56, 58, 62,

64A, 64B, 64C, 64D, 66, 68, 69, 70, and 120B, Final” (Parsons, 2002c).

Surface soil samples, subsurface soil samples, and groundwater samples were collected at SEAD-64C and submitted for chemical analysis. All of the samples were analyzed for TCL VOCs, SVOCs, pesticides/PCBs, TAL metals, and cyanide according to the NYSDEC CLP SOW. Summaries of the soil and groundwater results are presented in **Table 28** and **29**, respectively.

Soil

Ten soil samples were collected at SEAD-64C, and a summary of the analytical results are presented in **Table 28**. Four metals (calcium, magnesium, manganese, and potassium) exceeded their respective TAGM cleanup objective values.

Groundwater

Five groundwater samples were collected from wells at SEAD-64C, and the analytical results are summarized in **Table 29**. Phenol was detected in two wells at a concentration of 2 J $\mu\text{g/L}$, which exceeded its GA standard of 1 $\mu\text{g/L}$. Five metals (aluminum, iron, manganese, sodium, and thallium) exceeded their respective groundwater standards. Iron was detected in four of the samples at concentrations that exceeded its GA standard, with a maximum detection of 2,640 $\mu\text{g/L}$. Aluminum and manganese were detected in three samples at concentrations that exceeded their respective Secondary Drinking Water Regulation criteria levels. Sodium was detected at a concentration of 30,400 $\mu\text{g/L}$ in one sample, which exceeded its GA standard. Similarly, thallium was detected at a concentration of 2.1 J $\mu\text{g/L}$ in the same sample, which is greater than its MCL criteria value of 2 $\mu\text{g/L}$.

5.12 SEAD-64D: Garbage Disposal Area

The field investigation at SEAD-64D included an ESI that was performed in 1994. Complete analytical results are presented in “Decision Document – Mini Risk Assessment SEAD 9, 27, 28, 32, 33, 34, 43, 44A, 44B, 52, 56, 58, 62, 64A, 64B, 64C, 64D, 66, 68, 69, 70, and 120B, Final” (Parsons, 2002c).

During the ESI conducted in 1994, a total of 16 surface soil (0-0.2 ft.), 20 subsurface soil samples, and five groundwater samples were collected at SEAD-64D and submitted for chemical analysis. All samples were analyzed for TCL VOCs, SVOCs, pesticides/PCBs, TAL metals, and cyanide according to the NYSDEC CLP SOW. Summaries of the soil and groundwater results are presented in **Table 30** and **31**, respectively.

Soil

Thirty-six soil samples were collected at SEAD-64D. Three SVOCs, [Benzo(a)pyrene, dibenz(a,h)anthracene, and phenol] exceeded their respective TAGM cleanup objective values at least once. Nine metals (aluminum, calcium, iron, lead, manganese, potassium, sodium, thallium, and zinc) were detected in one to five samples at levels exceeding their respective TAGM cleanup objective values. Lead was detected in three samples with a maximum value of 60.7 mg/Kg. All other compounds exceeding TAGM values did so at less significant amounts.

In addition to soil samples, three test pits were excavated at SEAD-64D. No metallic objects were discovered in the test pits. Field measurements recorded at Test Pit 1 indicated that VOC levels in the headspace above the waste were at a concentration of 3 ppm. Two borings were drilled near this test pit. In Test Pit 2 an east-west trending 4-inch outside diameter red clay pipe was found at a depth of 2 ft. 3 inches. The interior of the pipe was dry and free of deposits.

The excavated material for all three pits was continuously screened for organic vapors and radioactivity with an OVM-580B and a Victoreen-190, respectively. Excluding the 3 ppm OVM reading from the 2-4 foot interval of TP64D-1, no readings above background levels (0 ppm of organic vapors and 10 to 15 microRems per hour of radiation) were observed during the excavations.

Groundwater

Six metals (aluminum, iron, lead, manganese, nickel, and thallium) exceeded their respective groundwater standards in at least one of the five groundwater samples collected, as shown in **Table 31**. Aluminum, iron, and manganese exceeded their GA standard or Secondary Drinking Water Regulation values in all five samples. Lead exceeded its GA standard of 25 µg/L in one sample with a concentration of 71.6 µg/L. The turbidity level recorded at that sample was greater than 200 NTUs. Thallium was detected at concentrations greater than its MCL value of 2 µg/L three times, with estimated concentrations ranging from 2.1 J µg/L to 3.2 J µg/L.

Low-flow sampling techniques were not used to collect the groundwater samples at SEAD-64D. Four of the five samples collected and analyzed exhibited turbidity levels greater than 100 NTUs. High turbidity in a groundwater sample can falsely increase the concentration of metals reported by the laboratory. It is presumed that the elevated concentrations of aluminum, iron, lead, and manganese are associated with the high turbidity in the samples. Groundwater concentrations of iron increased from 440 µg/L to 65,800 µg/L as turbidity increased from 1.5 NTUs to greater than 200 NTUs. Manganese groundwater concentrations increased from 223 µg/L to 8,250 µg/L, as turbidity increased from 1.5 NTUs to more than 200 NTUs.

5.13 SEAD-67: Dump Site East of Sewage Treatment Plant No. 4

Previous work at SEAD-67 included an ESI in 1993 and a TCRA in 2002/2003. The results of the investigations are summarized and presented below.

Time Critical Removal Action – 2002/2003

Weston completed a TCRA at SEAD-67 in 2002 and 2003, which included the excavation of approximately 250 cy of soil. SEAD-67 was subdivided into two areas prior to excavation in 2002. Area 1 (piles 1 and 2) had 483 cy of soil removed, and Area 2 (piles 3 through 7) had 1,308 cy of soil removed. The soil removed from SEAD-67 was classified and profiled as non-hazardous metal and PAH contaminated soil for treatment and disposal. Analytical results for the samples collected are summarized in **Table 32**, originally presented in “Time Critical Removal Action Metal Sites – SEAD 67” (Weston, 2004a).

Excavation Area 1

The waste piles were removed in December 2002, and confirmatory samples were collected in the surface soils directly around the removal. These initial samples had concentrations of mercury (the constituent of concern) above the cleanup goal of 0.1 mg/Kg at a maximum concentration of 0.32 mg/Kg. Three metals (beryllium, copper, and mercury) and five PAHs were also detected at concentrations exceeding their respective TAGM cleanup objective values.

In June 2003, a crew remobilized to SEAD-67 to remove an additional foot of soil from Area 1. The amount of soil to be removed was determined following the collection and analysis of a series of split spoon soil samples collected at 10 ft., 25 ft., and 50 ft. increments to the north, south, east, and west of the footprint represented by former waste Pile 1. A total of nine soil borings were advanced

and sampled to a depth of 4 ft. Analytical results indicated that only the first foot of soil to the lateral limits of the soil borings should be removed. Confirmatory samples were not collected following the soil removal, and soil removal at Area 1 was considered complete following the June 2003 removal action based on the results of the split spoon samples collected at depth prior to the excavation.

Excavation Area 2

The five waste piles at Area 2 were removed in December 2002, and confirmatory samples were collected in the footprints of each of the piles. The initial samples exhibited concentrations of mercury (the constituent of concern) above the cleanup goal of 0.1 mg/Kg at a maximum concentration of 0.16 mg/Kg. Five non-target metals (arsenic, copper, selenium, silver, and zinc) and two PAHs were also observed to exceed their respective TAGM cleanup objective values.

In June 2003, a crew remobilized out to the site to remove the top foot of soil from Area 2. The amount of soil removed was determined based on eight soil locations collected within a 135 ft. by 165 ft. perimeter limit encompassing the footprint represented by Piles 3 through 7. Thirty-two samples were collected to a maximum depth of 4 ft. in those eight borings. Concentrations of target metals and PAHs did not exceed their respective TAGM cleanup objective values in any of the samples collected below ground surface. Therefore, the top foot of soil to the lateral limits of the soil borings was removed. Confirmatory samples were not collected following the soil removal. Area 2 was considered remediated following the June removal action based on the split spoon samples collected at depth prior to the excavation.

Expanded Site Inspection – 1993

The ESI combined non-intrusive and intrusive sampling operations as part of the field investigation. The non-intrusive investigations included seismic refraction, electromagnetic, and ground penetrating radar (gpr) surveys. Intrusive investigations included five test pits, eight soil samples, installation and subsequent testing of three monitoring wells, and the collection of two surface water/sediment samples. All samples collected as part of the ESI were analyzed for the following constituents: VOCs, SVOCs, pesticides/PCBs, metals, and cyanide. A summary of the soil, groundwater, surface water, and sediment results presented below can be found in **Tables 33** through **36**. Analytical results for the samples collected can be found in “Decision Document for Removal Actions at SWMUs SEAD-24, SEAD-50, SEAD-54, and SEAD-67” (Parsons, 2001b).

Surface/Subsurface Soil

Available results indicated that soil in the piles and berm structures at SEAD-67 were impacted by SVOCs, predominantly PAHs, and by mercury. A total of 50 TCL/TAL compounds were detected in the soil samples, and ten compounds were detected at concentrations that exceeded their respective TAGM cleanup objective values, as shown in **Table 33**. Five carcinogenic PAHs and five metals (calcium, lead, manganese, mercury, and potassium) exceeded their respective TAGM values. Lead exceeded its TAGM value of 24.8 mg/Kg once with a concentration of 40.9 mg/Kg. Mercury was detected in all eight samples and exceeded its TAGM value of 0.1 mg/Kg in three samples with a maximum detection of 4 mg/Kg.

Groundwater

Available data indicated that the groundwater has not been significantly impacted by historic operations at SEAD-67. Aluminum, iron, and manganese were the only compounds detected at

concentrations exceeding the respective groundwater standards, shown in **Table 34**. Iron exceeded its GA standard of 300 µg/L in all three samples, with a maximum detection of 10,800 µg/L. Aluminum exceeded its Secondary Drinking Water Regulation value of 50 µg/L in all three samples, with a maximum detection of 5,790 µg/L. Elevated levels of turbidity were recorded in groundwater samples collected at SEAD-67. It is likely that the noted exceedances of aluminum, iron and manganese were associated with the elevated turbidity levels.

Surface Water / Sediments

Surface water results indicated that the unnamed stream near SEAD-67 has not been significantly impacted by contaminants. Aluminum and iron were detected at concentrations above the designated NYS AWQS surface water criteria value, as shown in **Table 35**.

Sediment near SEAD-67 has been impacted by SVOCs (mostly PAHs), pesticides, and a few metals (copper, manganese, nickel, and silver), summarized in **Table 36**.

The results of the ESI served as the basis for conducting the TCRA at SEAD-67.

5.14 SEAD-122B: Small Arms Range, Airfield Parcel

The investigative work at the SAR included an EBS in 1998, an initial site investigation in 2002, and a treatability study in 2004.

Treatability Study – 2004

In 2004 a treatability study was conducted, and approximately 500 cy of soil were excavated from locations where high concentrations of total lead were found during the 2002 investigation. Metals other than lead that were detected at levels above their respective NYSDEC cleanup objective levels

were located within the areas with high lead concentrations. Elevated lead concentrations included any value above 400 ppm. The excavation area was delineated by lead concentrations greater than 400 ppm and included the western face of the backstop berm and a drainage swale that carried surface water runoff away from the firing range area. The surface of the floor of the range was also excavated.

Confirmatory soil samples were collected and analyzed for total lead to ensure that all soil with total lead concentrations in excess of 400 ppm were removed during the treatability study. If lead concentrations exceeded 400 ppm in the confirmation sample, excavation continued in that area and an additional confirmation sample was collected. The final samples reported confirm that all excavated locations detected lead at levels less than 400 ppm. The maximum detection of lead in the final confirmation samples was 299 ppm detected at CS012, which was collected in the area where soil was formerly stockpiled. A summary of lead data that characterizes current site conditions is presented in **Table 37**; samples that were removed during excavation and preliminary confirmation samples that were subsequently dug out are not part of the final data set and are not included in the summary presented in **Table 37**, since they are no longer representative of current soil conditions at the range. Confirmatory soil analytical results are presented in “The Characterization Report – Small Arms Range – Airfield (SEAD-122B), Revised Final” (Parsons, 2004).

Initial Site Investigation – 2002

Surface soil samples were collected at 25 different locations within the SAR. Two samples were collected at each location with the exception of one location, which only collected a sample at one depth. The samples were analyzed for TAL metals, Synthetic Precipitation Leaching Procedure (SPLP) metals, and Toxic Characteristic Leaching

Procedure (TCLP) metals. Each sample was screened for visible bullets and bullet fragments before being sent to the laboratory for analysis. A summary of the soil results are presented in **Table 38**.

Subsurface soil samples were collected from seven borings located in the two berms and from three monitoring wells located exterior to the bermed area. Each boring advanced within the berms had three to seven associated subsurface samples, while one sample was collected from each monitoring well. The 32 collected samples (including one duplicate) ranged in depth from surface to 30 ft. bgs. The samples were analyzed for TAL metals, TCLP metals, and SPLP metals.

Lead, the main constituent of concern, was primarily found in the surface soil samples with a maximum concentration of 88,700 ppm detected along the southeast perimeter of the berm (impact area). Additional metal results, including antimony, arsenic, copper, silver, sodium, thallium, and zinc, were found primarily in the surface soil samples at concentrations slightly over the soil cleanup objective. These concentrations were all collocated in areas where high levels of lead were detected. One TCLP lead concentration was above the RCRA limit of 5,000 µg/L.

The SPLP metals results indicated that there were levels of antimony, iron, and thallium above the NYSDEC Class GA standards. The maximum detected concentrations of iron and thallium were consistent with Seneca background levels. Four of the antimony SPLP concentrations that exceeded the GA limit were within the proposed excavation area for the treatability study. The remaining four detections were in an area where the antimony concentrations in soil were below the maximum Seneca background concentration. A comprehensive table of results can be found in "The Characterization Report – Small Arms Range – Airfield (SEAD-122B), Revised Final" (Parsons, 2004).

Groundwater

Three monitoring wells were installed and sampled in 2002. The groundwater samples were collected using low-flow sampling procedures with a peristaltic pump and dedicated tubing, and the samples were analyzed for TAL metals. Metal concentrations detected in the groundwater were below NYSDEC Class GA standards with the exception of antimony and iron. The elevated antimony and iron concentrations were likely due to the elevated turbidities of the samples. The antimony and iron concentrations detected in the downgradient wells were generally consistent with the concentrations in the upgradient well. In addition, lead, the primary contaminant of concern at small arms ranges, was not detected in any of the groundwater samples. Therefore, it is concluded that groundwater is not impacted by the SAR site soil. Groundwater data is summarized in **Table 39**.

Environmental Baseline Survey – 1998

Surface soil samples were collected at five different locations within the SAR. The samples were collected at locations immediately downrange and in locations that were believed to be impact points for the shots. The samples were analyzed for TAL metals. A summary of the EBS soil samples is presented in **Table 40**.

Seven metals exceeded their respective TAGMs. Two metals, copper and lead, exceeded their TAGM values in all six samples. The maximum concentrations of these metals exceeded their TAGMs by 15 times and 1,962 times, respectively. Less prevalent metals included antimony, arsenic, and silver, which were found to exceed their TAGMs in two to three samples. Three metals (chromium, magnesium, and zinc) and cyanide exceeded their TAGMs in one sample, and the exceedances were between 1 time and 3 times their TAGM values.

5.15 SEAD-122E: Plane Deicing Area

The investigative work at SEAD-122E included an EBS that was performed in 1998 and 1999. The Final EBS Report was issued to the USEPA and the NYSDEC in May 1999 (Parsons, May 1999).

Environmental Baseline Survey – 1998/1999

The purpose of the EBS was to determine if soils or groundwater on the perimeter of three pads were impacted by the deicing fluids used on the planes. The constituents of concern are SVOCs and principal components of deicing fluids (alcohols/glycols, i.e., ethylene glycol, propylene glycol, total unknown alkanes) in soil and groundwater.

The investigation included the advancement and sampling of one soil boring at each identified fueling/deicing location. Each of the selected soil borings was located in a low spot immediately adjacent to the asphalt pad. Two soil samples were collected from each boring, one from the top 2-inches of soil, with the second being collected at depths of either 2 to 2.5 ft. bgs (at two locations) or 6 to 7.5 ft. below grade (one location). A temporary well was installed in each of the three soil borings subsequent to the completion of soil sampling, and a groundwater sample was recovered from the well after purging using a peristaltic pump. Summaries of the soil and groundwater results are presented in **Table 41** and **42**, respectively.

Twenty SVOCs, comprised mainly of PAHs and phthalates, were found in the six soil samples collected from the three soil borings (**Table 41**). The maximum detections of PAHs were collocated in one surface soil sample collected from the edge of the pavement next to central fueling/deicing station. No phthalates were detected in this sample. The PAH concentrations at the other five locations were at least an order of magnitude lower than the maximum concentration. No deicing

chemicals (e.g., glycols) were detected in any of the six soil samples characterized during this event.

Five contaminants were found in the four groundwater samples collected (**Table 42**). Bis(2-ethylhexyl)phthalate was detected in all four groundwater samples collected, as well as in the field blank, and is believed to be an artifact of the sampling process and the use of the temporary wells. Four other SVOCs (fluoranthene, hexachloro-butadiene, phenanthrene, and pyrene) were detected in the sample collected from the boring where the majority of the PAHs were detected in the surface soil. None of the detected compounds found in the groundwater were present exceeded their exceeded any groundwater standards.

6 SUMMARY OF RISK ASSESSMENT RESULTS

At some SWMUs, a mini risk assessment was conducted to estimate the risks associated with current and future site conditions. A mini risk assessment is a conservative, screening risk assessment tool. Due to the conservative nature of the mini risk assessment, it is likely that a more traditional risk assessment would estimate even lower risks. The mini risk assessment estimated the human health and ecological risk that could result from the site if no remedial action were taken. Maximum site concentrations were used as the exposure point concentrations (EPCs) for every site except SEAD-13. Based on USEPA comments received in 2005, the mini risk assessment completed for SEAD-13 was re-calculated using the 95% upper confidence limit as the EPC, and the results of the revised mini risk assessment are included in the discussion below.

Human Health Risk Assessment

The reasonable maximum human exposure was evaluated. A four-step process was used for assessing site-related human health risks for a reasonable maximum exposure scenario:

- *Hazard Identification*--identified the contaminants of concern based on several factors such as toxicity, frequency of occurrence, and concentration;
- *Exposure Assessment*--estimated the magnitude of actual and/or potential human exposures, the frequency and duration of these exposures, and the pathways by which humans are potentially exposed;
- *Toxicity Assessment*--determined the types of adverse health effects associated with chemical exposures, and the relationship between magnitude of exposure (dose) and severity of adverse effects (response); and
- *Risk Characterization*--summarized and combined the outputs of the exposure and toxicity assessments to provide a quantitative assessment of site-related risks (for example, one-in-a-million excess cancer risk).

The receptors used in the risk assessment depended on the intended future use at that time the risk assessment was completed. SCIDA revised the future land use of the Depot in 2005, as shown in **Figure 1**, and the new future land uses for sites that were in the Conservation/Recreation area (SEADs 13, 64B, and 64D) are currently designated as a Residential/Resort for SEAD-13 and as a Training Area for SEADs 64B and 64D. The future uses for all other sites evaluated in a mini risk assessment have not changed. The receptors and exposure assumptions used under a Conservation/Recreation land use scenario are considered more conservative than the receptors and exposure assumptions that would be evaluated under a Training Area scenario. For instance, under a Training Area scenario, potential receptors may include child trespassers, adult trainees, adult trainers, and construction workers. The receptors for the Conservation/Recreation scenarios can generally be used as surrogate receptors for the Training Area scenario (i.e., a recreational child visitor receptor can be used as a surrogate receptor for a child trespasser; a park worker can be used as surrogate receptor for a trainer or trainee, who

would likely have a lower ingestion rate and exposure duration).

At SEAD-13, in addition to evaluating receptors under a Conservation/Recreation scenario, risks to residential receptors were also evaluated. The residential receptors (resident adult and resident child) can serve as the most conservative receptors that would be considered under a Residential/Resort scenario.

The potentially exposed populations that were evaluated for the following future use scenario are as follows:

Conservation/Recreation Area (SEADs 13, 64B, and 64D):

1. Park worker;
2. Recreational visitor (child); and
3. Construction worker.

Prison Area (SEADs 43, 56, 69, 44A, 44B, 52, 62, and 64C):

1. Prison inmate;
2. Prison worker;
3. Construction worker;
4. Day care center child; and
5. Day care center worker.

Institutional/Industrial Area (SEAD-122E):

1. Industrial worker;
2. Future on-site construction worker;
3. Future worker at on-site day care center; and
4. Future child at on-site day care center.

The exposure pathways presented reflect the projected future use of the each area at the time the risk assessment was completed. The following exposure pathways were considered:

1. Inhalation of particulate matter in ambient air (all future receptors);
2. Ingestion and dermal contact to on-site surface soils (all future receptors);
3. Ingestion and dermal contact to on-site surface and subsurface soils (construction worker); and

4. Ingestion of groundwater (daily) (all receptors except the construction worker).

Under current USEPA guidelines, the likelihood of carcinogenic and non-carcinogenic effects due to exposure to site-related chemicals is considered separately. Non-carcinogenic risks were assessed by the calculation of a Hazard Index (HI), which is an expression of the chronic daily intake of a chemical divided by its safe or Reference Dose (RfD). An HI that exceeds 1.0 indicates the potential for non-carcinogenic effects to occur. Carcinogenic risks were evaluated using a cancer Slope Factor (SF), which is a measure of the cancer-causing potential of a chemical. Slope Factors are multiplied by daily intake estimates to generate an upper-bound estimate of excess lifetime cancer risk. For known or suspected carcinogens, USEPA has established an acceptable cancer risk range of 10^{-4} to 10^{-6} (one-in-ten thousand to one-in-one million).

Ecological Risk Assessment

The reasonable maximum environmental exposure was also evaluated. A four-step process was used for assessing site-related ecological risks for a reasonable maximum exposure scenario:

- *Characterization of the Unit and the Ecological Communities it May Affect*—Includes ecological conditions observed at the unit, site habitat characterization, wildlife resources that are present in the area, and ecological resource values to wildlife and to humans;
- *Exposure Assessment*—Discusses chemicals of potential concern (COPC), exposure point concentrations, and it presents exposure assessments. Chemical distribution of COPCs, and their uptake through various pathways are also discussed in this section. And daily intakes of COPCs through environmental media are quantified as well;
- *Toxicity Assessment*—Assesses ecological effects that potentially may result from receptor exposure to COPCs. Evaluates

potential toxicity of each COPC in each medium and defines toxicity benchmark values that will be used to calculate the ecological quotient (EQ); and

- *Risk Characterization*—Integrates the results of the preceding elements of the assessment. It estimates risk with respect to the assessment endpoints, based on the predicted exposure to and toxicity of each COPC.

Ecological risk was then presented in terms of an EQ, which is derived from the results of the exposure quantification and the toxicity assessment for each COPC. The EQs are based on relevant measurement endpoints and are indicative of the potential for each chemical to pose an ecological risk to receptors. In general, guidelines suggest that EQs less than or equal to 1 present no probable risk. EQs between 1 and 10 present a small potential for environmental effects; EQs between 10 and 100 present a significant potential that effects could result from greater exposure; and EQs greater than 100 indicate the highest potential for expected effects.

6.1 SEAD 13: Inhibited Red-Fuming Nitric Acid Disposal Site

Data from the site investigations served as the basis of a mini risk assessment that was performed to assess potential site risks. As stated above, the human health risk assessment was revised in accordance with recent USEPA guidance. As a result, the human health risk assessment was conducted using the 95% upper confidence level as the EPC. The maximum detected concentration was used as the EPC for the ecological risk assessment. For comparison purposes, risk to residential receptors was also evaluated.

The results of the mini risk assessment (**Table 43**) indicated that risks to all recreational and residential receptors were below the USEPA acceptable limits (i.e., HI of 1 or less and a cancer risk in the range of

10^{-4} ~ 10^{-6} or less) if exposure to groundwater is limited. The total non-cancer HI from all exposure routes is less than 1 for the construction worker, but exceeds 1 for the park worker (HI=7) and the recreational visitor (HI=3). The elevated HI for both receptors is due to ingestion of groundwater, with nitrate/nitrite-nitrogen, aluminum, and manganese in groundwater as the largest contributors to risk for both receptors. When the groundwater pathway is eliminated, the total HIs for these receptors are 0.08 and 0.07, which meets the USEPA HI criteria of less than 1. The cancer risk for the park worker, recreational visitor, and the construction worker were at acceptable limits.

Risks to a resident were also calculated, which serves as an evaluation of risks to receptors under the new land use scenario, Resort/Residential. The cancer risk for the resident (adult), $2E-4$, is greater than the EPA acceptable limit of $1E-4$; and the cancer risk for resident (child), $1E-4$, is at the acceptable limit. The cancer risk is due to ingestion of groundwater. If the groundwater pathway were eliminated, the cancer risk value for future residents would be within acceptable limits.

An ecological risk assessment was completed and no chemicals of concern (COCs) were identified.

6.2 SEAD 39: Building 121 Boiler Blowdown Leach Pit

No risk assessment was performed since a TCRA was proposed for SEAD-39.

6.3 SEAD-40: Building 319 Boiler Blowdown Leach Pit

No risk assessment was performed since a TCRA was proposed for SEAD-40.

6.4 SEAD-41: Building 718 Boiler Blowdown Leaching Pit

No risk assessment was performed since a TCRA was proposed for SEAD-41.

6.5 SEADs 43, 56, and 69: Building 606 – Old Missile Propellant Test Laboratory/ Herbicide and Pesticide Storage/ Disposal Area

The mini risk assessment evaluated risk to receptors under the Prison land use scenario (i.e., prison worker, prison inmate, construction worker, worker at onsite day care, and child at on-site day care center). It should be noted that the described property shall be used and maintained for a correctional facility in perpetuity. **Table 44** summarizes the calculated cancer and non-cancer risks for all receptors and exposure routes considered in the risk assessment presented in *Decision Document – Mini Risk Assessment* (Parsons, 2002c). The total cancer risk from all exposure routes is within or below the USEPA target range for all five receptors. Likewise, the total non-cancer HI from all exposure routes is less than 1 for all five receptors.

An ecological risk assessment was completed and no COCs were identified.

6.6 SEAD-44A: Quality Assurance Test Laboratory

The risk assessment completed for SEAD-44A indicated total cancer risks below or within the USEPA target ranges for all receptors under the Prison land use scenario (i.e., prison worker, prison inmate, construction worker, worker at on-site day care, and child at on-site day care center). Likewise the total non-cancer risk and total non-cancer HIs from all exposure routes are less than 1 for all receptors. The described property shall be used and maintained for a correctional facility in perpetuity. The results of total cancer risk and total

non-cancer HI are summarized in **Table 45** and in the *Decision Document – Mini Risk Assessment* (Parsons, 2002c).

An ecological risk assessment was completed and no COCs were identified.

6.7 SEAD-44B: Quality Assurance Test Laboratory

The mini risk assessment evaluated risk to receptors under the Prison land use scenario (i.e., prison worker, prison inmate, construction worker, worker at on-site day care, and child at on-site day care center). The described property shall be used and maintained for a correctional facility in perpetuity. **Table 46** summarizes the calculated cancer and non-cancer risks for all receptors and exposure routes considered in the risk assessment presented in *Decision Document – Mini Risk Assessment* (Parsons, 2002c). The total cancer risk from all exposure routes is within or below the USEPA target range for all five receptors. Likewise, the total non-cancer HI from all exposure routes is less than 1 for all five receptors.

6.8 SEAD-52: Buildings 608 and 612 – Ammunition Breakdown Area

The mini risk assessment evaluated risk to receptors under the Prison land use scenario (i.e., prison worker, prison inmate, construction worker, worker at on-site day care, and child at on-site day care center). The described property shall be used and maintained for a correctional facility in perpetuity. The total cancer risk from all exposure routes was calculated to be within or below the USEPA acceptable limits for all five receptors. In addition, the total non-cancer HI from all exposure routes was less than 1, the USEPA acceptable limit for non-cancer risks, for all five receptors. A summary of the risk assessment results is presented in **Table 47**, and a full discussion is presented in the *Decision Document – Mini Risk Assessment* (Parsons, 2002c).

An ecological risk assessment was completed and no COCs were identified.

6.9 SEAD-62: Nicotine Sulfate Disposal Area near Buildings 606 or 612

The mini risk assessment evaluated risk to receptors under the Prison land use scenario (i.e., prison worker, prison inmate, construction worker, worker at on-site day care, and child at on-site day care center). The described property shall be used and maintained for a correctional facility in perpetuity. The total cancer risk from all exposure routes was below the USEPA acceptable level for all five receptors. The total non-cancer HI from all exposure routes was less than 1 for all five receptors. A summary of the risk assessment results is presented in **Table 48**, and a full discussion is presented in the *Decision Document – Mini Risk Assessment* (Parsons, 2002c).

An ecological risk assessment was completed and no COCs were identified.

6.10 SEAD-64B: Garbage Disposal Area

The cancer and non-cancer risks for all future potential receptors under the Conservation/Recreation land use scenario (park worker, recreational visitor – child, and construction worker) and exposure routes (inhalation of dust, ingestion of soil, and dermal contact to soil, surface water, and sediment) for SEAD-64B were evaluated during the mini risk assessment. The total cancer risk from all exposure routes were below the USEPA acceptable level for all three receptors. The total non-cancer HI from all exposure routes were less than 1 for all three receptors. A summary of the risk assessment results is presented in **Table 49**, and a full discussion is included in the *Decision Document – Mini Risk Assessment* (Parsons, 2002c).

An ecological risk assessment was completed and no COCs were identified.

6.11 SEAD-64C: Garbage Disposal Area

The cancer and non-cancer risks for all future potential receptors under the Prison land use scenario (prison inmate, prison worker, on-site construction worker, day care center – child, and day care center - worker) and exposure routes (inhalation of dust and groundwater, ingestion of soil and groundwater, and dermal contact to soil and groundwater) for SEAD-64C were evaluated during the mini risk assessment conducted in 2001 and 2002. The described property shall be used and maintained for a correctional facility in perpetuity. The total cancer risk from all exposure routes was below the USEPA acceptable level for all five receptors. The total non-cancer HI from all exposure routes was less than 1 for all five receptors. A summary of the risk assessment results is presented in **Table 50**, and a full discussion is included in the *Decision Document – Mini Risk Assessment* (Parsons, 2002c).

An ecological risk assessment was completed and no COCs were identified.

6.12 SEAD-64D: Garbage Disposal Area

Table 51 summarizes the calculated cancer and non-cancer risks for all future potential receptors under the Conservation/Recreation land use scenario (park worker, recreational visitor – child, and construction worker) and exposure routes (inhalation of dust and groundwater, ingestion of soil and groundwater, and dermal contact to soil and groundwater) considered in the mini risk assessment conducted at SEAD-64D in 2001 and 2002. The total cancer risk from all exposure routes was below the USEPA acceptable level for all three receptors. The total non-cancer HI from all exposure routes were less than 1 for the construction worker, but equal to or greater than 1 for the park worker (HI=3) and the recreational child

visitor (HI=1). The elevated HI for both receptors is due solely to ingestion of groundwater. The elevated HIs for the park worker and the child visitor were due to elevated concentrations of metals in the groundwater samples, which were associated with the observed elevated turbidity levels. If the groundwater pathway were eliminated, the non-cancer risk would be reduced to within acceptable levels. A full discussion is included in the *Decision Document – Mini Risk Assessment* (Parsons, 2002c).

An ecological risk assessment was completed and no COCs were identified.

6.13 SEAD-67: Dump Site East of Sewage Treatment Plant No. 4

No risk assessment was performed since a TCRA was proposed for SEAD-67.

6.14 SEAD-122B: Small Arms Range, Airfield Parcel

No risk assessment was performed.

6.15 SEAD-122E: Plane Deicing Area

In response to a request by USEPA, the Army presented the results of a mini risk assessment in a memo submitted in March 2005. The cancer and non-cancer risks for all future potential receptors (industrial worker, construction worker, day care center – worker, and day care center – child) and exposure routes (inhalation of dust in air, ingestion of soil or groundwater, or dermal contact to soil) for SEAD-122E were evaluated. The total non-cancer HIs for all exposure routes were less than 1 for all four receptors. The total cancer risk from all exposure routes was within USEPA acceptable level for the industrial worker and the construction worker. The cancer risk values for the day care center worker and day care center child, 2E-4 and 1E-4, respectively, were above or at the acceptable level. The unacceptable cancer risk is due to

dermal contact to soil and ingestion of soil. The contributing COCs are carcinogenic PAHs in soils. A summary of the risk assessment results is presented in **Table 52**.

For comparison purposes, risk to residential receptors was evaluated. The non-cancer His were less than 1. Cancer risk values were above USEPA acceptable limits due to the presence of cPAHs in the soil.

7 SUMMARY OF THE REMEDIAL GOALS AND PROPOSED ACTION

The selected remedy for any site should, at a minimum, eliminate or mitigate all significant threats to the public health or the environment presented by the hazardous waste present at the site. Based on the data presented and summarized earlier within this Proposed Plan, the Army has individually selected preferred remedies for SEADs 13, 39, 40, 41, 43/56/69, 44A, 44B, 52, 62, 64B, 64C, 64D, 67, 122B, and 122E that satisfy this objective.

The Army’s preferred remedy for each of the individual sites described in this Proposed Plan is to establish institutional controls (ICs). The specific ICs required for each site are summarized in the table below and are described as follows:

SEAD	Reversionary Deed	Groundwater Use Restriction	Residential Use Restriction	Digging Restriction
13		✓		
39		✓	✓	
40		✓	✓	
41		✓		
43	✓			
44A	✓			
44B	✓			
52	✓			
56	✓			
62				
64B				✓
64C	✓			✓
64D		✓		✓
67		✓	✓	
69	✓			
122B			✓	
122E			✓	

For the purposes of discussion in this Proposed Plan, the types of ICs required as part of the recommended remedies are divided into Group I and Group II. All ICs that include a Reversionary Deed are included in Group I. Group II consists of ICs that restrict groundwater use, restrict residential use, and/or restrict unauthorized excavation.

Group I Institutional Controls:

Reversionary Deed

A Reversionary Deed was used to convey land in the southern part of the former Depot to the State of New York for the construction of the Five Points Correctional Facility. The deed limits the use of the site in perpetuity to a correctional facility, and indicates that “...the property shall not be sold, leased, mortgaged, assigned or otherwise disposed of” without the consent of the Government. Provisions of the Reversionary Deed apply to the following SWMUs:

- SEAD-43: Building 606 – Old Missile Propellant Test Laboratory
- SEAD-44A: Quality Assurance Test Laboratory

- SEAD-44B: Quality Assurance Test Laboratory
- SEAD-52: Buildings 608 and 612 – Ammunition Breakdown Area
- SEAD-56: Building 606 – Herbicide and Pesticide Storage
- SEAD-62: Nicotine Sulfate Disposal Area near Buildings 606 or 612
- SEAD-69: Building 606 – Disposal Area

Based on the results of previous investigations, mini risk assessments, and/or removal actions, these sites do not pose a risk or threat to human health and the environment. These SWMUs are located within the bounds of the Five Points Correctional Facility, which has been transferred to the State of New York under a Quitclaim Deed. The Quitclaim Deed, which was recorded by the Seneca County Clerk on 26 September 2000 (see Liber 612 Page 014 through page 031). If the conditions of the Reversionary Deed are breached, the property reverts back to the US Government. SEADs 43, 44A, 44B, 52, 56, 62, and 69 are subject to the terms stated in the deed.

Reversionary Deed and Unauthorized Digging

The Reversionary Deed, described immediately above, and an IC that prohibits unauthorized excavations is the preferred remedy for another SWMU located within the current Five Points Correctional Facility. These combined ICs apply to:

- SEAD-64C: Garbage Disposal Area

Based on the results of previous investigations and the mini risk assessment, SEAD-64C does not pose a risk or threat to human health and the environment. SEAD-64C is located in the Prison area, which has been transferred to the State of New York under a Quitclaim Deed. The Quitclaim Deed was recorded by the Seneca County Clerk on 26 September 2000 (see Liber 612 Page 014 through page 031).

In addition, SEAD-64C is a former garbage disposal area that was closed prior to 1979. At the time of closure, the former dump site was covered with fill and the area has since re-vegetated. The proposed IC would prohibit digging within the bounds of the site will be established.

Group II Institutional Controls:

Groundwater Restriction

A Deed was used to document the transfer of the land currently used for the Hillside Children’s Center in the north end of the former Depot to the SCIDA. As part of the Deed, the Army notified SCIDA that groundwater contamination had been identified in the vicinity of Building 718. The Deed further stated “The Grantee, its successors and assigns, and agree that in the event they use the groundwater as a public water supply source at the Property, they will comply with all applicable laws and regulations.” Therefore, the Army has proposed and implemented an IC that prohibits access to and use of groundwater. The groundwater IC will be applied to the entire area, and be specifically applicable to:

- SEAD-41: Building 718 Boiler Blowdown Leaching Pit

SEAD-41 is located within the parcel of land in the North Depot that is designated for Institutional land use and currently used for the youth facility. SEAD-41 is subject to the terms stated in the deed for the North Depot. In addition, groundwater sampling data indicated that TPH concentrations (690 ppm) in the upper aquifer in the vicinity of Building 718 (SEAD-41) exceeded the New York State Public Water System standards for unspecified organic contamination in groundwater of 100 ppb.

The deed states that “the Property is currently served by a public water supply system that uses Seneca Lake as the source of drinking water.” The groundwater use restriction will eliminate contact with groundwater. The IC will continue until the concentration of hazardous substances in

groundwater beneath have been reduced to levels that allow for unlimited exposure and unrestricted use.

Groundwater Restriction

A groundwater use restriction is proposed at the following site:

- SEAD-13: Inhibited Red-Fuming Nitric Acid (IRFNA) Disposal Site.

The groundwater use restriction will eliminate contact with groundwater as an exposure pathway for human health risk, thereby reducing risk to within acceptable levels for potential human receptors. As discussed above, there is risk associated with the use of the groundwater, driven by the concentrations of nitrate, aluminum, and manganese identified. The Army believes that the risk due to the presence of metals is associated with the suspended solids that were present in the collected groundwater samples, and is aware that the nitrate is related to past activities conducted in the area. The nitrate concentrations are naturally attenuating, and will continue to diminish with time.

Therefore, the Army is proposing that an IC will be implemented over the geographic area of SEAD-13 to prevent access to or use of the groundwater until the Class GA Groundwater Standards are met. The IC will continue until the concentration of hazardous substances in groundwater beneath have been reduced to levels that allow for unlimited exposure and unrestricted use. With USEPA approval, once groundwater cleanup standards are achieved, the groundwater use restrictions may be eliminated.

Residential and Groundwater Restrictions

A ROD signed by the Army and USEPA in 2004 for land within the Planned Industrial/Office Development (PID) Area of the former Depot imposes ICs that:

- Prevent residential housing, elementary and secondary schools, childcare facilities and playgrounds activities.
- Prevent access to or use of the groundwater until Class GA Groundwater Standards are met.

Although these restrictions were recommended specifically because of conditions identified at SEAD-27, SEAD-64A, and SEAD-66, the Army and the USEPA agreed that these ICs will be imposed on all land within the PID. The Army recommends that the existing ICs identified for the PID Area be applied to the following SWMUs:

- SEAD-39: Building 121 Boiler Blowdown Leach Pit
- SEAD-40: Building 319 Boiler Blowdown Leach Pit
- SEAD-67: Dump Site East of Sewage Treatment Plant No. 4

The ICs will continue until the concentration of hazardous substances in the soil and the groundwater beneath have been reduced to levels that allow for unlimited exposure and unrestricted use.

Residential Use Restriction

A residential use restriction is recommended for:

- SEAD-122B: Small Arms Range, Airfield Parcel
- SEAD-122E: Plane Deicing Area

An IC will be implemented over the entire Airfield Parcel, including SEAD-122B and SEAD-122E, to prohibit the development and use of property for residential housing, elementary and secondary schools, child care facilities, and playgrounds. This IC will be applied to all areas within the property until such time as data are developed and approved by the Army and the USEPA to confirm that portions of the overall property are suitable for unrestricted use. The boundary of the Airfield Parcel is defined

as the boundary of the Airfield Special Events, Institutional, and Training area highlighted on **Figure 1**.

Unauthorized Digging Restriction

The Army recommends that a no digging restriction, which would be established to prevent unauthorized excavation at the SWMU, be imposed for the following SWMU:

- SEAD-64B: Garbage Disposal Area.

SEAD-64B is a former garbage disposal area that was closed prior to 1979. At the time of closure, the former dump site was covered with fill and the area has since re-vegetated. The proposed IC would prohibit digging within the bounds of the former waste site.

Unauthorized Digging and Groundwater Restriction

The Army recommends that ICs be imposed at SEAD-64D, Garbage Disposal Area to restrict:

- Unauthorized excavation, and
- Access to and use of groundwater.

The results of the mini risk assessment indicate that ingestion of groundwater could pose a risk to future receptors. An IC will be implemented over the geographic area of SEAD-64D to prevent access to or use of the groundwater until the Class GA Groundwater Standards are met. The IC will continue until the concentration of hazardous substances in groundwater beneath have been reduced to levels that allow for unlimited exposure and unrestricted use. With USEPA approval, once groundwater cleanup standards are achieved, the groundwater use restrictions may be eliminated.

SEAD-64D is a former garbage disposal area that was closed prior to 1979. At the time of closure, the former dump site was covered with fill and the area has since re-vegetated. The proposed IC would prohibit digging within the bounds of the former waste site.

The Army's recommended remedial actions for all sites discussed in this Proposed Plan includes ICs. To implement the Army's recommended remedy at the eight sites discussed in Group II, as defined above, a land use control (LUC) RD for each of the five IC combinations in Group II (e.g., groundwater restriction only; groundwater and residential restriction; residential restriction only; digging restriction only; and digging and groundwater restriction) will be prepared to satisfy the applicable requirements of Paragraphs (a) and (c) of ECL Article 27, Section 1318: Institutional and Engineering Controls. The LUC RD Plan will include: a Site Description; the IC Land Use Restrictions, the IC Mechanism to ensure that the land use restrictions are not violated in the future, Reporting/Notification requirements. In addition, the Army will prepare an environmental easement for each of the sites, consistent with Section 27-1318(b) and Article 71, Title 36 of ECL, in favor of the State of New York and the Army, which will be recorded at the time of transfer of the sites from federal ownership. A schedule for completion of the draft LUC RD covering the individual sites will be completed within 21 days of the ROD signature, consistent with Section 14.4 of the FFA. In accordance with the FFA and CERCLA §121(c), the remedial action (including ICs) will be reviewed no less often than every 5 years. After such reviews, modifications may be implemented to the remedial program, if appropriate.

8 REFERENCES

NYSDEC, 2004 - Division of Water Technical and Operational Guidance Series 1.1.1 (TOGS 1.1.1), Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations, June 1998 as amended January 1999, April 2000, and June 2004.

NYSDEC, 1999 - Technical Guidance for Screening Contaminated Sediments, November 1993, as amended July 1994, March 1998, and January 1999.

NYSDEC, 1994 - Technical and Administrative Guidance Memorandum #4046, Determination of Soil Cleanup Objectives and Cleanup Levels, Jan 24, 1994.

Parsons, 2004a –Decision Document – Mini Risk Assessment SEAD-13 Inhibited Red Fuming Nitric Acid (IRFNA) Disposal Site, Final, July 2004.

Parsons, 2004b - Ordnance and Explosives Engineering Evaluation and Cost Assessment Seneca Army Depot Activity, Final, January 2004.

Parsons, 2004c – Record of Decision for Sites Requiring Institutional Controls in the Planned Industrial/Office Development or Warehousing Areas, Final, September 2004.

Parsons, 2002a – Action Memorandum and Decision Document, Time-Critical Removal Actions, Four Metal Sites (SEADs 24, 50/54, & 67), Seneca Army Depot Activity, Final, August 2002.

Parsons, 2002b – Action Memorandum and Decision Document, Time-Critical Removal Actions, Three VOC Sites (SEADs 38, 39, & 40), Seneca Army Depot Activity, Final, August 2002.

Parsons, 2002c – Decision Document – Mini Risk Assessment (SEAD-9, 27, 28, 32, 33, 34, 43, 44A, 44B, 52, 56, 58, 62, 64A, 64B, 64C, 64D, 66, 68,

69, 72, and 120B) Seneca Army Depot Activity, Final, May 2002.

Parsons, 2001a - Low Temperature Thermal Desorption Cost and Performance Test Report, Draft, September 2001.

Parsons, 2001b – Completion Report for Six Areas of Concern SEADs (43, 56, 69, 44A, 44B, 52, 62, and 120B, Seneca Army Depot Activity, Final, May 2001.

Parsons, 1999 - Environmental Baseline Survey for Non-Evaluated Sites, Final, May 1999.

Parsons, 1995a – Expanded Site Investigation – Eight moderately Low Priority AOCs SEADs 5,9,12 (A and B), (43, 56, 69), 44 (A and B), 50, 58, and 59 Seneca Army Depot Activity, December 1995

Parsons, 1995b – Expanded Site Inspection Seven Low Priority AOCs SEADs 60, 62, 63, 64 (A, B, C, and D), 67, 70, and 71, Seneca Army Depot Activity, April 1995.

Parsons, 1994 – SWMU Classification Report, Final, September 1994

Seneca County Clerk, 2000 – Quitclaim Deed for the Five Point's Correctional Facility – Liber 612 Page 014 through Page 031, September 2000.

Title 40, Code of Federal Regulations, Part 261, Identification and Listing of Hazardous Waste.

Title 40 Code of Federal Regulations, Part 300, National Oil and Hazardous Substances Pollution Contingency Plan.

Title 42 US Code Chapter 103, Comprehensive Environmental Response, Compensation, and Liability, Section 9620.

USATHAMA, 1988 - Update of the Initial Installation Assessment of Seneca Army Depot, NY, prepared

by Environmental Science and Engineering Inc. (ESE), Report No. AMXTH-IR-A-157(U), August 1988.

USATHAMA, 1980 - Installation Assessment of Seneca Army Depot, Report No. 157, Aberdeen Proving Grounds, MD, January 1980.

USEPA, Army, and NYSDEC, 1993 - Federal Facility Agreement Under CERCLA Section 120, Docket Number: II-CERCLA-FFA-00202, January 1993.

USEPA, 2002 - Test Methods for Evaluating Solid Waste, Physical/Chemical Methods, Integrated Manual, NTIS-PB2002105715, EPA SW-846, 2002.

USEPA, 2001 - National Primary Drinking Water Standards, EPA 816-F-01-007, March 2001

USEPA, 1999 - A Guide to Preparing Superfund Proposed Plans, Records of Decision, and Other Remedy Selection Decision Documents, EPA 540-R-98-031, OSWER 9200.1-23P, PB98-963241, July 1999.

Weston, 2004a – Seneca Army Depot VOC Sites – SEADs 39 and 40, Time-Critical Removal Action, Seneca County, Romulus, New York, October 2004.

Weston, 2004b – Seneca Army Depot Activity Time-Critical Removal Action Metal Sites – SEAD 67, Seneca County, Romulus, New York, March 2004.

Weston, 2003 – Seneca Army Depot Activity UXO and Soil Remediation AREA-44A Seneca County, Romulus, New York, May 2003.

GLOSSARY

Aquifer

An aquifer is a saturated permeable geologic unit or rock formation that can store significant quantities of water and transmit the water under ordinary hydraulic gradients, possibly to wells.

Area of Concern (AOC)

Areas of Concern (AOCs) include both solid waste management units where releases of hazardous substances may have occurred and locations where there has been a release or threat of a release in the environment of a hazardous substance, pollutant, or contaminant (including radionuclides) under CERCLA.

Army Corps of Engineer (USACE)

The engineering organization of the U.S. Army. The districts involved in the Seneca Army Depot Activity project include the New York District (CENAN), the New England District (CENED), and the Engineering and Support Center, Huntsville (CEHNC).

Asbestos-Containing Material (ACM)

Asbestos-containing material (ACM) is defined by the Asbestos National Emission Standards for Hazardous Air Pollutants (NESHAP) as any material containing more than one percent (1%) asbestos

Baseline Risk Assessment (BRA)

A baseline risk assessment (BRA) is an assessment conducted before cleanup activities begin at a site to identify and evaluate the threat to human health and the environment. After remediation has been completed, the information obtained during a BRA can be used to determine whether the cleanup levels were reached.

Base Realignment and Closure (BRAC)

A congressionally mandated process that involves closure of military bases. The goal of BRAC is to transition the former bases from military uses to

civilian reuse, with the intent of minimizing the negative effects of base closure by spurring economic development and growth. The SEDA was listed as a base to be closed in October 1995. Base closure is in the process of being performed.

Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA)

The Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA), commonly known as Superfund, was enacted by Congress on December 11, 1980. This law created a tax on the chemical and petroleum industries and provided broad Federal authority to respond directly to releases or threatened releases of hazardous substances that may endanger public health or the environment. CERCLA:

Established prohibitions and requirements concerning closed and abandoned hazardous waste sites;

Provided for liability of persons responsible for releases of hazardous waste at these sites; and

Established a trust fund to provide for cleanup when no responsible party could be identified.

The law authorizes two kinds of response actions:

Short-term removals, where actions may be taken to address releases or threatened releases requiring prompt response.

Long-term remedial response actions, that permanently and significantly reduce the dangers associated with releases or threats of releases of hazardous substances that are serious, but not immediately life threatening. These actions can be conducted only at sites listed on EPA's National Priorities List (NPL).

CERCLA also enabled the revision of the National Contingency Plan (NCP). The NCP provided the guidelines and procedures needed to respond to

releases and threatened releases of hazardous substances, pollutants, or contaminants. The NCP also established the NPL.

CERCLA was amended by the Superfund Amendments and Reauthorization Act (SARA) on October 17, 1986.

Cleanup

Cleanup is the term used for actions taken to deal with a release or threat of release of a hazardous substance that could affect humans and or the environment. The term sometimes is used interchangeably with the terms remedial action, removal action, response action, or corrective action.

Closure (under RCRA)

RCRA closure is a process for preventing the release of hazardous waste, hazardous constituents, leachate, contaminated run-off, or hazardous waste decomposition products to the groundwater, surface water, or the atmosphere from a hazardous waste management facility after the facility stops receiving waste. The closure process may involve waste removal and management, decontamination and decommissioning of equipment, application of final covers, and other release-preventing actions. The process also involves developing a closure plan, having the plan approved as part of the facility's permit, and implementing the plan when the facility closes. Closure occurs after the facility accepts the final shipment of hazardous waste (unless the facility qualifies for a delay of closure). (Reference: <http://tis.eh.doe.gov/oepa/guidance/rcra/closur.pdf>)

Closure (Department of Defense)

Under the Department of Defense's definition, closure means that all missions of the base will cease or be relocated. All personnel (military, civilian, and contractor) will either be eliminated or relocated. The entire base will be excessed and the property disposed.

(Reference:

<http://www.hqda.army.mil/acsimweb/brac/braco.htm>
)

Community Environmental Response Facilitation Act (CERFA – Public Law 102-426)

The Community Environmental Response Facilitation Act (CERFA) was passed by Congress in 1992 and amended Section 9620(h) of CERCLA, which addresses Federal real property transfers. In enacting the legislation, Congress stated that the closure of Federal facilities has an adverse impact on local economies and that delays in remediating contaminated real property add to this burden by delaying the conversion of such property to productive uses. The statute applies to real property owned by the Department of Defense and on which the U.S. plans to terminate Federal government operations, as well as to real property that has been used as a military installation and which is being closed or realigned pursuant to base closure. Federal entities with control over such properties must identify those upon which no hazardous substances or petroleum products/derivatives were stored for more than one year, released, or disposed of by examining relevant sources of data, such as property deeds, aerial photographs, or other similar documents. Subsequent transfers or sales of the identified properties by the limited states must contain assurances that the U.S. will assume full responsibility for any response or corrective action that may become necessary after the transfer of property is completed. Where hazardous substances or petroleum products/derivatives were stored for more than one year, released, or disposed of on the U.S.-owned real property, the Federal entity with control of the property must notify the state of any lease entered into by the controlling Federal entity that will remain in effect after operations cease. The notification must be sent to the state prior to the signing of the lease, and must inform the state of the name of the lessee, and a description of the uses permitted under the condition of the lease. (Reference:

http://www.ntc.blm.gov/learningplace/res_CERFA.html)

Completion Report

A report that documents and certifies that conditions found at an Area of Concern (AOC) do not constitute a threat to public health, welfare, or the environment and that further remedial measures are not necessary. Such documentation shall meet, to the extent practicable and as necessary under the specific facts pertaining to the AOC, the requirements of EPA's RCRA Facility Investigation Guidance, EPA's Guidance for Conducting RI/FSs under CERCLA, and any subsequent amendments to these documents and all other applicable federal or state guidance.

Contaminant

A contaminant is any physical, chemical, biological, or radiological substance or matter present in any media at concentrations that may result in adverse effects on air, water, or soil.

Detection Limit

The lowest concentration of a chemical that can be distinguished reliably from a zero concentration.

Disposal

Disposal is the final placement or destruction of toxic, radioactive, or other wastes; surplus or banned pesticides or other chemicals; polluted soils; and drums containing hazardous materials from removal actions or accidental release. Disposal may be accomplished through the use of approved secure landfills, surface impoundments, land farming, deep well injection, or ocean dumping.

Environmental Protection Agency (EPA)

The Federal regulatory agency responsible for enforcing the environmental rules and regulations of the United States. Representatives from the EPA Region 2, which includes New York State, are involved in the review and oversight of the environmental work being conducted at the Seneca Army Depot Activity.

Expanded Site Investigation (ESI)

An expanded investigation that typically includes media sampling and analyses. An ESI is performed following a Preliminary Site Investigation to obtain more information regarding the concentrations of pollutants at a site.

Federal Facilities Agreement (FFA) [also known as the Interagency Agreement (IAG)]

An agreement signed between EPA, NYSDEC, and the Army that describes the process for identifying, investigating and remediating sites at the Seneca Army Depot Activity.

GA Groundwater Standard

A water quality standard promulgated by the NYSDEC that establishes a minimum quality of a groundwater supply that could be used as a source of drinking water.

Groundwater

Groundwater is the water that flows beneath the earth's surface that fills pores between such materials as sand, soil, or gravel and that often supplies wells and springs. *See also Aquifer.*

Heavy Metal

The term heavy metal refers to a group of toxic metals including arsenic, chromium, copper, lead, mercury, silver, and zinc. Heavy metals often are present at industrial sites at which operations have included battery recycling and metal plating.

Hydrogeology

Hydrogeology is the study of groundwater, including its origin, occurrence, movement, and quality.

Incinerator

A furnace or container used for burning waste materials.

Inorganic Compounds

An inorganic compound is a compound that generally does not contain carbon atoms (although carbonate and bicarbonate compounds are notable

exceptions). Examples of inorganic compounds include various metals.

Landfill

A landfill is a land disposal site for non-hazardous solid wastes at which the waste is spread in layers compacted to the smallest practical volume.

Lead

Lead is a heavy metal that is hazardous to health if breathed or swallowed. Its use in gasoline, paints, and plumbing compounds has been sharply restricted or eliminated by federal laws and regulations. *See also Heavy Metal.*

Mean Sea Level (MSL)

The average height of the sea surface, based upon hourly observation of the tide height on the open coast or in adjacent waters that have free access to the sea. In the United States, it is defined as the average height of the sea surface for all stages of the tide over a nineteen year period. Mean sea level, commonly abbreviated as MSL and referred to simply as 'sea level,' serves as the reference surface for all altitudes in upper atmospheric studies.

(Reference:

<http://earthobservatory.nasa.gov:81/Library/glossary.php3?xref=mean%20sea%20level>)

Mercury

Mercury is a heavy metal that can accumulate in the environment and is highly toxic if breathed or swallowed. Mercury is found in thermometers, measuring devices, pharmaceutical and agricultural chemicals, chemical manufacturing, and electrical equipment. *See also Heavy Metal.*

Maximum Contaminant Level (MCL)

MCLs are established under the Safe Drinking Water Act as concentrations of pollutants considered protective for drinking water.

Monitoring Well

A monitoring well is a well drilled at a specific location on or off a hazardous waste site at which groundwater can be sampled at selected depths and studied to determine the direction of groundwater flow and the types and quantities of contaminants present in the groundwater.

National Contingency Plan (NCP)

The NCP, formally the National Oil and Hazardous Substances Contingency Plan, is the major regulatory framework that guides the Superfund response effort. The NCP is a comprehensive body of regulations that outlines a step-by-step process for implementing Superfund responses and defines the roles and responsibilities of EPA, other federal agencies, states, private parties, and the communities in response to situations in which hazardous substances are released into the environment. *See also Superfund.*

National Exposure Research Laboratory (NERL)

EPA's National Exposure Research Laboratory (NERL) is comprised of several divisions with diversified research specialties. NERL conducts research and development that leads to improved methods, measurements, and models to assess and predict exposures of humans and ecosystems to harmful pollutants and other conditions in air, water, soil, and food.

National Priorities List (NPL)

The NPL is EPA's list of the most serious uncontrolled or abandoned hazardous waste sites identified for possible long-term remedial response under Superfund. Inclusion of a site on the list is based primarily on the score the site receives under the Hazard Ranking System (HRS). Money from Superfund can be used for cleanup only at sites that are on the NPL. USEPA is required to update the NPL at least once a year. *See also Superfund.*

New York State Department of Environmental Conservation (NYSDEC)

NYSDEC's missions include detecting and controlling sources of pollution, protecting and managing New York's natural resources, informing and educating the public about environment, natural resources, and government's actions to protect them.

NYCRR

The New York State compilation of Codes, Rules, and Regulations.

Organic Chemical or Compound

An organic chemical or compound is a substance produced by animals or plants that contains mainly carbon, hydrogen, and oxygen.

Percent Solids

A physical determination used to measure the amount of solid material (i.e., normally defined as non-volatile material at 105 °C) that is contained in a sample, such as a soil or sediment.

Permeability

Permeability is a characteristic that represents a qualitative description of the relative ease with which rock, soil, or sediment will transmit a fluid (liquid or gas).

Pesticide

A pesticide is a substance or mixture of substances intended to prevent or mitigate infestation by, or destroy or repel, any pest. Pesticides can accumulate in the food chain and/or contaminate the environment if misused.

Polychlorinated Biphenyl (PCB)

PCBs are a group of toxic, persistent chemicals, produced by chlorination of biphenyl, that once were used in high voltage electrical transformers because they conducted heat well while being fire resistant and good electrical insulators. These contaminants typically are generated from metal degreasing, printed circuit board cleaning, gasoline,

and wood preserving processes. Further sale or use of PCBs in the United States was banned in 1979.

Polycyclic Aromatic Hydrocarbon (PAH)

A PAH is a chemical compound that contains more than one fused benzene ring. They are commonly found in petroleum fuels, coal products, and tar.

Preliminary Assessment and Site Investigation (PA/SI)

A PA/SI is the process of collecting and reviewing available information about a known or suspected hazardous waste site or release. The PA/SI usually includes a visit to the site.

Proposed Plan

The Proposed Plan is the first step in the remedy selection process. The Proposed Plan provides information supporting the decisions of how the preferred alternative was selected. It summarizes the site information and how the alternatives comply with the requirements of the NCP and CERCLA. The Proposed Plan is provided to the public for comment. The responses to the Proposed Plan comments are provided in the ROD.

Record of Decision (ROD)

A ROD is a legal, technical, and public document that explains which cleanup alternative will be used at a Superfund NPL site. The ROD is based on information and technical analysis generated during the remedial investigation and feasibility study (RI/FS) and consideration of public comments and community concerns. *See also Preliminary Assessment and Site Investigation and Remedial Investigation and Feasibility Study.*

Release

A release is any spilling, leaking, pumping, pouring, emitting, emptying, discharging, injecting, leaching, dumping, or disposing into the environment of a hazardous or toxic chemical or extremely hazardous substance, as defined under RCRA. *See also Resource Conservation and Recovery Act.*

Remedial Action (RA)

A RA is the actual construction or implementation of a remedy at a site or portion thereof.

Remedial Investigation and Feasibility Study (RI/FS)

The RI/FS is the step in the Superfund cleanup process that is conducted to gather sufficient information to support the selection of a site remedy that will reduce or eliminate the risks associated with contamination at the site. The RI involves site characterization through collection of data and information necessary to characterize the nature and extent of contamination at the site. The RI also determines whether the contamination presents a significant risk to human health or the environment. The FS focuses on the development of specific response alternatives for addressing contamination at a site.

Resource Conservation and Recovery Act (RCRA)

RCRA is a federal law enacted in 1976 that established a regulatory system to track hazardous substances from their generation to their disposal. The law requires the use of safe and secure procedures in treating, transporting, storing, and disposing of hazardous substances. RCRA is designed to prevent the creation of new, uncontrolled hazardous waste sites.

Risk Assessment

The process of assessing and analyzing threats that contaminants found at a site pose to surrounding populations and the environment. The resulting analysis is used as a preliminary, conservative estimate of the potential level of threat that is posed so that appropriate and cost-effective countermeasures can be identified and implemented.

Sediment Criteria

Technical guidance provided by NYSDEC, the Division of Fish and Wildlife, that describes

allowable sediment quality for a variety of chemicals. The values provided in this document have been adopted as screening levels for comparison to site data. Exceedances of these values provides that basis for further evaluation and decision making.

Seismic Refraction

Seismic refraction is the velocity that a compression wave travels through a material. The compression wave velocity is measured by placing sensitive motion detectors on the ground surface, then impacting the ground with an object such as a sledgehammer. An oscilloscope measures the travel time of the compression wave to each motion detector. Mathematical analysis of the travel times will produce a profile of changes in compression wave velocity, which can then determine the type of material below the ground.

Semivolatile Organic Compound (SVOC)

SVOCs, composed primarily of carbon and hydrogen atoms, have boiling points greater than 2000°C. Common SVOCs include PCBs and phenol. See *Polychlorinated Biphenyl*.

Seneca Army Depot Activity (SEDA)

A 10,634-acre military facility, constructed in 1941, located in central New York that was responsible for storage and management of military commodities, including munitions. The Depot ceased military operations in 2000. Environmental cleanup activities will continue until all sites have been addressed.

Seneca County Board of Supervisors

The board that oversees Seneca County's governmental affairs.

Significant Threat

The term refers to the level of contamination that a state would consider significant enough to warrant an action. The thresholds vary from state to state.

Soil Boring

Soil boring is a process by which a soil sample is extracted from the ground for chemical, biological, and analytical testing to determine the level of contamination present.

Solid Waste

Any garbage, refuse, sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility and other discarded material, including solid, liquid, semisolid, or contained gaseous materials resulting from industrial, commercial, mining, agricultural, and other community activities.

Solid Waste Management Unit (SWMU)

A SWMU is a RCRA term used to describe a contiguous area of land on or in which solid waste, including hazardous waste, was managed. This includes landfills, tanks, land treatment areas, spills, and other areas where waste materials were handled. Identification of all SWMUs at SEDA was performed as part of the RCRA Part B Permit Application process.

Subsurface

Underground, or beneath the surface.

Surface Water

Surface water is all water naturally open to the atmosphere, such as rivers, lakes, reservoirs, streams, and seas.

Superfund

Superfund is the trust fund that provides for the cleanup of hazardous substances released into the environment, regardless of fault. The Superfund was established under CERCLA and subsequent amendments to CERCLA. The term Superfund also is used to refer to cleanup programs designed and conducted under CERCLA and its subsequent amendments. *See also Comprehensive Environmental Response, Compensation, and Liability Act.*

Technical Administrative Guidance Memorandum (TAGM)

TAGMs are technical guidance publications provided by NYSDEC that describes various processes and procedures recommended by NYSDEC for the investigation and remediation of hazardous waste sites. One TAGM, No. 4046, provides guideline values for recommended soil cleanup levels at waste sites.

Time Critical Removal Action (TCRA)

A TCRA can be used to eliminate possible threats, and to expedite the closure process and lessen, and perhaps eliminate, any possible threats, current or future, that these sites may pose to human health and the environment.

Total Petroleum Hydrocarbon (TPH)

TPH refers to a measure of concentration or mass of petroleum hydrocarbon constituents present in a given amount of air, soil, or water.

Volatile Organic Compound (VOC)

A VOC is one of a group of carbon-containing compounds that evaporate readily at room temperature. Examples of VOCs include trichloroethene, trichloroethylene, and BTEX. These contaminants typically are generated from metal degreasing, printed circuit board cleaning, gasoline, and wood preserving processes.

Water Table

A water table is the boundary between the saturated and unsaturated zones beneath the surface of the earth, the level of groundwater, and generally is the level to which water will rise in a well.

TABLE 1
Summary of Surface Soil Analytical Results - SEAD-13
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum	Frequency	NYSDEC	Number	Number	Number
		Value	of	TAGM	of	of	of
			Detection	4046 ⁽²⁾	Exceedances	Detects	Analyses
VOCs							
Acetone	ug/Kg	86	8%	200	0	1	13
Chloroform	ug/Kg	2	8%	300	0	1	13
Methyl ethyl ketone	ug/Kg	26	8%	300	0	1	13
Toluene	ug/Kg	6	8%	1,500	0	1	13
SVOCs							
1,4-Dichlorobenzene	ug/Kg	3,300	3%	8,500	0	1	30
2,4,5-Trichlorophenol	ug/Kg	9.5	3%	100	0	1	30
2,4,6-Trichlorophenol	ug/Kg	10	7%	NS	0	2	30
2,4-Dinitrotoluene	ug/Kg	1,600	3%	NS	0	1	30
2,6-Dinitrotoluene	ug/Kg	120	3%	1,000	0	1	30
2-Chloronaphthalene	ug/Kg	5.4	3%	NS	0	1	30
2-Methylnaphthalene	ug/Kg	42	13%	36,400	0	4	30
4-Chlorophenyl phenyl ether	ug/Kg	5.9	3%	NS	0	1	30
4-Methylphenol	ug/Kg	9,200	20%	900	1	6	30
Acenaphthene	ug/Kg	650	10%	50,000	0	3	30
Acenaphthylene	ug/Kg	16	7%	41,000	0	2	30
Anthracene	ug/Kg	16	7%	50,000	0	2	30
Benzo(a)anthracene	ug/Kg	100	27%	224	0	8	30
Benzo(a)pyrene	ug/Kg	110	30%	61	1	9	30
Benzo(b)fluoranthene	ug/Kg	89	30%	1,100	0	9	30
Benzo(ghi)perylene	ug/Kg	86	27%	50,000	0	8	30
Benzo(k)fluoranthene	ug/Kg	74	27%	1,100	0	8	30
Bis(2-Chloroethoxy)methane	ug/Kg	5.6	3%	NS	0	1	30
Bis(2-Ethylhexyl)phthalate	ug/Kg	1,900	17%	50,000	0	5	30
Carbazole	ug/Kg	180	17%	NS	0	5	30
Chrysene	ug/Kg	190	40%	400	0	12	30
Di-n-butylphthalate	ug/Kg	140	7%	8,100	0	2	30
Di-n-octylphthalate	ug/Kg	210	7%	50,000	0	2	30
Dibenz(a,h)anthracene	ug/Kg	15	7%	14	1	2	30
Dibenzofuran	ug/Kg	340	20%	6,200	0	6	30
Diethyl phthalate	ug/Kg	7	3%	7,100	0	1	30
Fluoranthene	ug/Kg	800	47%	50,000	0	14	30
Fluorene	ug/Kg	18	7%	50,000	0	2	30
Hexachlorobenzene	ug/Kg	210	7%	410	0	2	30
Indeno(1,2,3-cd)pyrene	ug/Kg	53	20%	3,200	0	6	30
N-Nitrosodiphenylamine	ug/Kg	99	3%	NS	0	1	30
Naphthalene	ug/Kg	510	17%	13,000	0	5	30
Nitrobenzene	ug/Kg	5.7	3%	200	0	1	30
Phenanthrene	ug/Kg	1,400	40%	50,000	0	12	30
Phenol	ug/Kg	14,000	7%	30	1	2	30
Pyrene	ug/Kg	540	47%	50,000	0	14	30
PESTICIDES/PCBs							
4,4'-DDE	ug/Kg	3.6	8%	2,100	0	1	13
METALS							
Aluminum	mg/Kg	21,200	100%	19,300	2	30	30
Antimony	mg/Kg	5.1	37%	5.9	0	11	30
Arsenic	mg/Kg	10	100%	8.2	2	30	30
Barium	mg/Kg	157	100%	300	0	30	30
Beryllium	mg/Kg	1.2	100%	1.1	1	30	30
Cadmium	mg/Kg	1	57%	2.3	0	17	30
Calcium	mg/Kg	83,900	100%	121,000	0	30	30
Chromium	mg/Kg	30.5	100%	29.6	2	30	30
Cobalt	mg/Kg	19.3	100%	30	0	30	30
Copper	mg/Kg	84.2	100%	33	9	30	30
Iron	mg/Kg	33,700	100%	36,500	0	30	30
Lead	mg/Kg	75.6	83%	24.8	9	25	30
Magnesium	mg/Kg	25,600	100%	21,500	1	30	30
Manganese	mg/Kg	1150	100%	1,060	1	30	30
Mercury	mg/Kg	0.09	47%	0.1	0	14	30
Nickel	mg/Kg	71.1	100%	49	8	30	30
Potassium	mg/Kg	2,800	100%	2,380	1	30	30
Selenium	mg/Kg	1.4	70%	2	0	21	30
Silver	mg/Kg	0.35	7%	0.75	0	2	30
Sodium	mg/Kg	186	63%	172	2	19	30
Thallium	mg/Kg	0.91	20%	0.7	1	6	30
Vanadium	mg/Kg	35.8	100%	150	0	30	30
Zinc	mg/Kg	152	100%	110	3	30	30
OTHER ANALYSES							
Nitrate/Nitrite Nitrogen	mg/Kg	27.9	94%	NS	0	16	17
Percent Solids	%	96.7	100%	NS	0	17	17

NOTES:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.
NS = No standard

TABLE 2
Summary of Subsurface Soil Analytical Results - SEAD-13
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs							
Carbon disulfide	ug/Kg	2	5%	2,700	0	1	20
Methylene chloride	ug/Kg	4	15%	100	0	3	20
Toluene	ug/Kg	2	5%	1,500	0	1	20
SVOCs							
Benzo(b)fluoranthene	ug/Kg	4.9	4%	1,100	0	1	25
Benzo(ghi)perylene	ug/Kg	20	4%	50,000	0	1	25
Bis(2-Ethylhexyl)phthalate	ug/Kg	24	12%	50,000	0	3	25
Chrysene	ug/Kg	6.6	16%	400	0	4	25
Di-n-butylphthalate	ug/Kg	20	8%	8,100	0	2	25
Di-n-octylphthalate	ug/Kg	110	8%	50,000	0	2	25
Fluoranthene	ug/Kg	7.5	4%	50,000	0	1	25
Phenanthrene	ug/Kg	5.1	12%	50,000	0	3	25
Pyrene	ug/Kg	4.6	4%	50,000	0	1	25
METALS							
Aluminum	mg/Kg	20,400	100%	19,300	2	25	25
Antimony	mg/Kg	5.8	32%	5.9	0	8	25
Arsenic	mg/Kg	10.2	100%	8.2	2	25	25
Barium	mg/Kg	584	100%	300	1	25	25
Beryllium	mg/Kg	1	100%	1.1	0	25	25
Cadmium	mg/Kg	0.9	20%	2.3	0	5	25
Calcium	mg/Kg	98,100	100%	121,000	0	25	25
Chromium	mg/Kg	35.8	100%	29.6	3	25	25
Cobalt	mg/Kg	18.9	100%	30	0	25	25
Copper	mg/Kg	44	100%	33	2	25	25
Iron	mg/Kg	42,500	100%	36,500	4	25	25
Lead	mg/Kg	18.6	68%	24.8	0	17	25
Magnesium	mg/Kg	21,700	100%	21,500	1	25	25
Manganese	mg/Kg	708	100%	1,060	0	25	25
Mercury	mg/Kg	0.07	32%	0.1	0	8	25
Nickel	mg/Kg	57.1	100%	49	4	25	25
Potassium	mg/Kg	2,790	100%	2,380	3	25	25
Selenium	mg/Kg	0.66	80%	2	0	20	25
Silver	mg/Kg	1	12%	0.75	1	3	25
Sodium	mg/Kg	252	100%	172	9	25	25
Thallium	mg/Kg	0.78	32%	0.7	4	8	25
Vanadium	mg/Kg	30.7	100%	150	0	25	25
Zinc	mg/Kg	108	100%	110	0	25	25
OTHER ANALYSES							
Nitrate/Nitrite Nitrogen	mg/Kg	0	100%	NS	0	5	5
Percent Solids	%	96.8	100%	NS	0	5	5

NOTES:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.

NS = No standard

TABLE 3
Summary of Groundwater Analytical Results - SEAD-13
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	Criteria Level ⁽²⁾		Number of Exceedances	Number of Detects	Number of Analyses
SVOCs								
2-Methylnaphthalene	ug/L	0.069	5%	(d)		0	1	22
Bis(2-Ethylhexyl)phthalate	ug/L	23	18%	5		2	4	22
Butylbenzylphthalate	ug/L	0.1	18%	(d)		0	4	22
Diethyl phthalate	ug/L	0.16	41%	(d)		0	9	22
Pyrene	ug/L	0.06	5%	(d)		0	1	22
METALS								
Aluminum	ug/L	70,900	82%	50	(a)	16	18	22
Antimony	ug/L	52.7	32%	3		5	7	22
Arsenic	ug/L	15.1	32%	10	(b)	1	7	22
Barium	ug/L	459	100%	1,000		0	22	22
Beryllium	ug/L	3.6	23%	4	(c)	0	5	22
Cadmium	ug/L	0.57	5%	5		0	1	22
Calcium	ug/L	1,140,000	100%		(d)	0	22	22
Chromium	ug/L	109	41%	50		3	9	22
Cobalt	ug/L	47.7	50%	200	(d)	0	11	22
Copper	ug/L	35	50%	200		0	11	22
Cyanide	ug/L	124	27%		(d)	0	6	22
Iron	ug/L	97,900	86%	300		13	19	22
Lead	ug/L	34.8	45%	15	(c)	3	10	22
Magnesium	ug/L	314,000	100%	35,000		19	22	22
Manganese	ug/L	3,210	100%	300		13	22	22
Mercury	ug/L	0.05	5%	0.7		0	1	22
Nickel	ug/L	134	77%	100		1	17	22
Potassium	ug/L	42,000	100%		(d)	0	22	22
Selenium	ug/L	17.8	41%	10		1	9	22
Silver	ug/L	1.6	5%	50		0	1	22
Sodium	ug/L	52,700	100%	20,000		8	22	22
Vanadium	ug/L	115	32%		(d)	0	7	22
Zinc	ug/L	223	86%	5,000	(a)	0	19	22
OTHER ANALYSES								
NITRATE	mg/L	731	100%	10		5	10	10
NITRITE	mg/L	2.1	50%	1		2	5	10
Nitrate/Nitrite Nitrogen	mg/L	731	100%		(d)	0	21	22
Fluoride	mg/L	0.45	100%	1.5		0	6	6
Turbidity	NTU	999	100%		(d)	0	21	21

NOTES:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class GA Groundwater, except as noted below.

a) USEPA Secondary Drinking Water Regulation, non-enforceable (EPA 822-B-00-001, Summer 2000)

b) USEPA Maximum Contaminant Limit announced 10/31/01. Source <http://www.epa.gov/safewater/arsenic.html>

c) USEPA National Primary Drinking Water Standards, EPA 816-F-01-007 March 2001

d) No standard

NTU = nephelometric turbidity units

TABLE 4
Summary of Surface Water Analytical Results - SEAD-13
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC AWQS Class C ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
SVOCS							
4-Methylphenol	ug/L	23	33%	NS	0	3	9
Isophorone	ug/L	0.057	11%	NS	0	1	9
Phenol	ug/L	9.3	22%	5	1	2	9
METALS							
Aluminum	ug/L	3,830	88%	100	8	14	16
Antimony	ug/L	3	11%	NS	0	1	9
Arsenic	ug/L	6.7	56%	150	0	5	9
Barium	ug/L	91.6	100%	NS	0	9	9
Calcium	ug/L	75,300	100%	NS	0	9	9
Chromium	ug/L	5.4	11%	139	0	1	9
Cobalt	ug/L	1.6	11%	5	0	1	9
Copper	ug/L	6.6	78%	17	0	7	9
Iron	ug/L	5,870	100%	300	9	9	9
Lead	ug/L	7.5	56%	223	0	5	9
Magnesium	ug/L	14,200	100%	NS	0	9	9
Manganese	ug/L	1,850	100%	NS	0	9	9
Mercury	ug/L	0.11	11%	1.4	0	1	9
Nickel	ug/L	7.1	56%	100	0	5	9
Potassium	ug/L	7,200	89%	NS	0	8	9
Sodium	ug/L	70,000	100%	NS	0	9	9
Vanadium	ug/L	6.2	33%	14	0	3	9
Zinc	ug/L	27.7	89%	159	0	8	9
OTHER ANALYSES							
Nitrate/Nitrite Nitrogen	mg/L	0.11	67%	NS	0	6	9
Fluoride	mg/Kg	0.39	100%	NS	0	3	3
Turbidity	NTU	5.7	100%	NS	0	6	6

NOTES:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class C Surface Water.

Hardness dependent values assumed a hardness of 217 mg/L.

NS = No standard

NTU = nephelometric turbidity units

TABLE 5
Summary of Sediment Analytical Results - SEAD-13
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYS Benthic Aquatic Life Chronic Toxicity ⁽²⁾	NYS Lowest Effect Level ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs								
Acetone	ug/Kg	380	100%			0	4	4
Methyl ethyl ketone	ug/Kg	140	25%			0	1	4
SVOCs								
2-Methylnaphthalene	ug/Kg	10	10%	1,330		0	1	10
4-Methylphenol	ug/Kg	58	50%	19.6		1	5	10
Acenaphthylene	ug/Kg	8.8	10%			0	1	10
Anthracene	ug/Kg	8.3	20%	4,184		0	2	10
Benzo(a)anthracene	ug/Kg	90	20%	469		0	2	10
Benzo(a)pyrene	ug/Kg	88	20%			0	2	10
Benzo(b)fluoranthene	ug/Kg	86	20%			0	2	10
Benzo(ghi)perylene	ug/Kg	57	20%			0	2	10
Benzo(k)fluoranthene	ug/Kg	55	20%			0	2	10
Chrysene	ug/Kg	190	20%			0	2	10
Di-n-octylphthalate	ug/Kg	9.9	10%			0	1	10
Dibenz(a,h)anthracene	ug/Kg	16	20%			0	2	10
Dibenzofuran	ug/Kg	4.3	10%			0	1	10
Fluoranthene	ug/Kg	120	40%	39,887		0	4	10
Fluorene	ug/Kg	6.4	10%	313		0	1	10
Indeno(1,2,3-cd)pyrene	ug/Kg	44	20%			0	2	10
Naphthalene	ug/Kg	6.8	10%	1,173		0	1	10
Phenanthrene	ug/Kg	160	30%	4,693		0	3	10
Pyrene	ug/Kg	270	40%	37,580		0	4	10
NITROAROMATICS								
Tetryl	ug/Kg	200	25%			0	1	4
METALS								
Aluminum	mg/Kg	18,400	100%			0	10	10
Antimony	mg/Kg	0.65	10%		2	0	1	10
Arsenic	mg/Kg	4.8	60%		6	0	6	10
Barium	mg/Kg	164	100%			0	10	10
Beryllium	mg/Kg	1	100%			0	10	10
Cadmium	mg/Kg	0.96	60%		0.6	5	6	10
Calcium	mg/Kg	42,200	100%			0	10	10
Chromium	mg/Kg	27.7	100%		26	3	10	10
Cobalt	mg/Kg	13.5	100%			0	10	10
Copper	mg/Kg	20.7	100%		16	10	10	10
Iron	mg/Kg	29,400	100%		20,000	9	10	10
Lead	mg/Kg	33.3	100%		31	1	10	10
Magnesium	mg/Kg	7,110	100%			0	10	10
Manganese	mg/Kg	778	100%		460	3	10	10
Mercury	mg/Kg	0.09	40%		0.15	0	4	10
Nickel	mg/Kg	35.4	100%		16	10	10	10
Potassium	mg/Kg	2,830	100%			0	10	10
Selenium	mg/Kg	0.49	30%			0	3	10
Silver	mg/Kg	3.2	10%			0	1	10
Sodium	mg/Kg	326	40%		1	4	4	10
Vanadium	mg/Kg	33.6	100%			0	10	10
Zinc	mg/Kg	114	60%		120	0	6	10
OTHER ANALYSES								
Nitrate/Nitrite Nitrogen	mg/Kg	6.4	70%			0	7	10
Percent Solids	%	90.3	100%			0	10	10
Fluoride	mg/Kg	270	100%			0	4	4

NOTES:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Technical Guidance for Screening Contaminated Sediments - January 1999

All organic criteria values derived based on assumed Total Organic Carbon content of 39,105 mg/Kg (SEDA average value).

TABLE 6
Summary of TCRA Soil Analytical Results - SEAD-39
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs							
1,2,4-Trimethylbenzene	ug/Kg	46	8%	NS	0	1	13
Ethylbenzene	ug/Kg	20	8%	5,500	0	1	13
Isopropylbenzene	ug/Kg	23	8%	NS	0	1	13
m,p-Xylene	ug/Kg	61	8%	NS	0	1	13
Methylene chloride	ug/Kg	43	8%	100	0	1	13
Naphthalene	ug/Kg	990	100%	3,700	0	13	13
n-Propylbenzene	ug/Kg	46	8%	NS	0	1	13
o-Xylene	ug/Kg	70	8%	NS	0	1	13
sec-Butylbenzene	ug/Kg	18	8%	NS	0	1	13
Toluene	ug/Kg	40	8%	1,500	0	1	13
Polyaromatic Hydrocarbons							
2-Methylnaphthalene	ug/Kg	14,000	100%	36,400	0	10	10
Acenaphthene	ug/Kg	35,000	100%	50,000	0	14	14
Acenaphthylene	ug/Kg	1,200	100%	41,000	0	10	10
Anthracene	ug/Kg	50,000	100%	50,000	0	16	16
Benz(a)anthracene	ug/Kg	110,000	100%	224	16	16	16
Benzo(a)pyrene	ug/Kg	79,000	100%	61	16	16	16
Benzo(b)fluoranthene	ug/Kg	110,000	100%	1,100	11	16	16
Benzo(g,h,i)perylene	ug/Kg	37,000	100%	50,000	0	16	16
Benzo(k)fluoranthene	ug/Kg	46,000	100%	1,100	3	16	16
Chrysene	ug/Kg	100,000	100%	400	14	16	16
Dibenzo(a,h)anthracene	ug/Kg	14,000	100%	14	14	14	14
Flouranthene	ug/Kg	250,000	100%	50,000	1	16	16
Flourene	ug/Kg	38,000	100%	50,000	0	14	14
Indeo(1,2,3-cd)pyrene	ug/Kg	47,000	100%	3,200	3	16	16
Naphthalene	ug/Kg	30,000	100%	3,700	2	15	15
Phenanthrene	ug/Kg	240,000	100%	50,000	1	16	16
Pyrene	ug/Kg	190,000	100%	50,000	1	16	16
ICP Metals							
Arsenic	mg/Kg	11	100%	7.5	8	16	16
Barium	mg/Kg	330	100%	300	1	16	16
Cadmium	mg/Kg	2	100%	2.3	0	15	15
Chromium	mg/Kg	23	100%	29	0	16	16
Lead ³	mg/Kg	44	100%	400	0	16	16
Mercury ⁴	mg/Kg	1	100%	0.13	2	16	16
Selenium	mg/Kg	1	100%	2	0	13	13
Silver	mg/Kg	2	100%	0.763	1	2	2

Note:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.
NS = No standard
- (3) USEPA Risk Based Residential Cleanup Goal for lead.
- (4) Site-specific cleanup goal for mercury is 0.13 mg/Kg.

TABLE 7
Summary of TCRA Soil Analytical Results - SEAD-40
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs							
1,1,1-Trichloroethane	ug/Kg	22	3%	800	0	1	38
1,2,4-Trimethylbenzene	ug/Kg	31	11%	NS	0	4	38
1,2-Dichlorobenzene	ug/Kg	53	3%	7,900	0	1	38
1,3,5-Trimethylbenzene	ug/Kg	24	8%	NS	0	3	38
1,4-Dichlorobenzene	ug/Kg	28	3%	8,500	0	1	38
4-Isopropyltoluene	ug/Kg	15	3%	NS	0	1	38
Ethylbenzene	ug/Kg	160	5%	5,500	0	2	38
m,p-Xylene	ug/Kg	860	16%	NS	0	6	38
Methylene chloride	ug/Kg	130	8%	100	1	3	38
Naphthalene	ug/Kg	280	45%	3,700	0	17	38
o-Xylene	ug/Kg	290	8%	NS	0	3	38
Toluene	ug/Kg	110	16%	1,500	0	6	38
Polyaromatic Hydrocarbons							
2-Methylnaphthalene	ug/Kg	370	32%	36,400	0	15	47
Acenaphthene	ug/Kg	4,200	55%	50,000	0	26	47
Acenaphthylene	ug/Kg	22,000	87%	41,000	0	41	47
Anthracene	ug/Kg	13,000	85%	50,000	0	40	47
Benz(a)anthracene	ug/Kg	22,000	87%	224	10	41	47
Benzo(a)pyrene	ug/Kg	33,000	89%	61	11	42	47
Benzo(b)fluoranthene	ug/Kg	36,000	89%	1,100	10	42	47
Benzo(g,h,i)perylene	ug/Kg	30,000	87%	50,000	0	41	47
Benzo(k)fluoranthene	ug/Kg	13,000	83%	1,100	10	39	47
Chrysene	ug/Kg	21,000	87%	400	10	41	47
Dibenzo(a,h)anthracene	ug/Kg	6,500	74%	14	10	35	47
Flouranthene	ug/Kg	30,000	89%	50,000	0	42	47
Flourene	ug/Kg	1,900	68%	50,000	0	32	47
Indeo(1,2,3-cd)pyrene	ug/Kg	28,000	87%	3,200	5	41	47
Naphthalene	ug/Kg	390	40%	13,000	0	19	47
Phenanthrene	ug/Kg	12,000	85%	50,000	0	40	47
Pyrene	ug/Kg	45,000	89%	50,000	0	42	47
ICP Metals							
Arsenic	mg/Kg	29	100%	7.5	9	47	47
Barium	mg/Kg	400	100%	300	0	47	47
Cadmium	mg/Kg	1.4	79%	2.3	0	37	47
Chromium	mg/Kg	140	100%	29	1	47	47
Lead ³	mg/Kg	180	100%	400	0	47	47
Mercury ⁴	mg/Kg	0.093	19%	0.13	0	9	47
Selenium	mg/Kg	0.72	4%	2	0	2	47
Silver	mg/Kg	0.5	15%	0.763	0	7	47

Note:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.
NS = No standard
- (3) USEPA Risk Based Residential Cleanup Goal for lead.
- (4) Site-specific cleanup goal for mercury is 0.13 mg/Kg.

TABLE 8
Summary of TCRA Soil Analytical Results - SEAD-41
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Unit	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs							
1,2,4-Trimethylbenzene	ug/Kg	0.41	40%	NS	0	2	5
Benzene	ug/Kg	1.50	100%	60	0	5	5
m-Xylene	ug/Kg	0.98	100%	NS	0	5	5
p-Cymene	ug/Kg	0.24	20%	NS	0	1	5
Toluene	ug/Kg	1.80	100%	1,500	0	5	5
Total Xylenes	ug/Kg	0.98	100%	1,200	0	5	5
SVOCs							
Acenaphthene	mg/Kg	0.26	20%	50	0	1	5
Anthracene	mg/Kg	0.29	20%	50	0	1	5
Benzo(a)anthracene	mg/Kg	0.84	80%	0.224	1	4	5
Benzo(a)pyrene	mg/Kg	0.71	20%	0.061	1	1	5
Benzo(b)fluoranthene	mg/Kg	1.40	80%	1.1	1	4	5
Benzo(ghi)perylene	mg/Kg	0.26	20%	50	0	1	5
Chrysene	mg/Kg	0.66	60%	0.4	1	3	5
Dibenzo(a,h)anthracene	mg/Kg	0.06	20%	0.014	1	1	5
Fluoranthene	mg/Kg	2.00	80%	50	0	4	5
Fluorene	mg/Kg	0.17	20%	50	0	1	5
Indeno(1,2,3-cd)pyrene	mg/Kg	0.27	20%	3.2	0	1	5
Naphthalene	mg/Kg	0.06	20%	13	0	1	5
Phenanthrene	mg/Kg	1.40	80%	50	0	4	5
Pyrene	mg/Kg	1.30	80%	50	0	4	5

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.

NS = No standard

TABLE 9
Summary of Soil Analytical Results - SEADs-43/ 56/ 69
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs							
MethyleneChloride	ug/Kg	11	26%	100	0	7	27
Acetone	ug/Kg	16	23%	200	0	6	26
Chloroform	ug/Kg	11	23%	300	0	6	26
Toluene	ug/Kg	27	32%	1500	0	9	28
Xylene(total)	ug/Kg	12	27%	1200	0	7	26
HERBICIDES							
2,4,5-T	ug/Kg	12	3%	1900	0	1	30
Dicamba	ug/Kg	11	3%		0	1	30
Dichloroprop	ug/Kg	72	3%		0	1	30
MCPD	ug/Kg	7,700	10%		0	3	30
SVOCs							
4-Methylphenol	ug/Kg	580	3%	900	0	1	30
Naphthalene	ug/Kg	200	7%	13,000	0	2	30
2-Methylnaphthalene	ug/Kg	88	7%	36,400	0	2	30
Acenaphthene	ug/Kg	570	7%	50,000	0	2	30
Dibenzofuran	ug/Kg	310	7%	6,200	0	2	30
Fluorene	ug/Kg	610	7%	50,000	0	2	30
Phenanthrene	ug/Kg	5,200	13%	50,000	0	4	30
Anthracene	ug/Kg	1,300	10%	50,000	0	3	30
Carbazole	ug/Kg	620	10%	50,000	0	3	30
Di-n-butylphthalate	ug/Kg	62	10%	8,100	0	3	30
Fluoranthene	ug/Kg	6,300	13%	50,000	0	4	30
Pyrene	ug/Kg	4,700	13%	50,000	0	4	30
Benzo(a)anthracene	ug/Kg	2,400	13%	224	2	4	30
Chrysene	ug/Kg	2,400	13%	400	2	4	30
bis(2-Ethylhexyl)phthalate	ug/Kg	2,700	70%	50,000	0	21	30
Benzo(b)fluoranthene	ug/Kg	1,600	10%	1,100	1	3	30
Benzo(k)fluoranthene	ug/Kg	2,000	10%	1,100	1	3	30
Benzo(a)pyrene	ug/Kg	2,000	10%	61	3	3	30
Indeno(1,2,3-cd)pyrene	ug/Kg	1,200	10%	3,200	0	3	30
Dibenz(a,h)anthracene	ug/Kg	520	10%	14	3	3	30
Benzo(g,h,i)perylene	ug/Kg	1,300	10%	50,000	0	3	30
PESTICIDES/PCBs							
Endosulfan I	ug/Kg	1.2	3%	900	0	1	30
alpha-Chlordane	ug/Kg	2.4	3%	540	0	1	30
METALS							
Aluminum	mg/Kg	27,000	100%	19,300	2	30	30
Antimony	mg/Kg	7.2	30%	6	1	9	30
Arsenic	mg/Kg	7.1	100%	8	0	30	30
Barium	mg/Kg	175	100%	300	0	30	30
Beryllium	mg/Kg	1.2	100%	1	1	30	30
Cadmium	mg/Kg	1.5	87%	2	0	26	30
Calcium	mg/Kg	141,000	100%	121,000	1	30	30
Chromium	mg/Kg	30.7	100%	30	2	30	30
Cobalt	mg/Kg	20.9	100%	30	0	30	30
Copper	mg/Kg	28.1	100%	33	0	30	30
Iron	mg/Kg	40,300	100%	36,500	1	30	30
Lead	mg/Kg	30.2	100%	25	2	30	30
Magnesium	mg/Kg	47,500	100%	21,500	3	30	30
Manganese	mg/Kg	782	87%	1,060	0	26	30
Mercury	mg/Kg	0.08	80%	0	0	24	30
Nickel	mg/Kg	57.2	100%	49	2	30	30
Potassium	mg/Kg	3560	100%	2,380	5	30	30
Selenium	mg/Kg	1.8	63%	2	0	19	30
Sodium	mg/Kg	151	87%	172	0	26	30
Vanadium	mg/Kg	41.8	100%	150	0	30	30
Zinc	mg/Kg	338	100%	110	10	30	30
Cyanide	mg/Kg	1.7	3%	0.35	1	1	30
OTHERANALYSES							
Nitrate/Nitrite-Nitrogen	mg/Kg	9.7	83%		0	25	30

Notes:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.

TABLE 10
Summary of Groundwater Analytical Results - SEAD-43/56/69
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	Criteria Level ⁽²⁾		Number of Exceedances	Number of Detects	Number of Analyses
HERBICIDES								
2,4,5-TP (Silvex)	ug/L	0.44	25%	0.26		1	1	4
METALS								
Aluminum	ug/L	2,870	100%	50	(a)	4	4	4
Antimony	ug/L	1.5	25%	3		0	1	4
Arsenic	ug/L	1.5	25%	10	(b)	0	1	4
Barium	ug/L	113	100%	1,000		0	4	4
Calcium	ug/L	138,000	100%		(c)	0	4	4
Chromium	ug/L	5.3	75%	50		0	3	4
Cobalt	ug/L	4.2	75%		(c)	0	3	4
Copper	ug/L	4	75%	200		0	3	4
Iron	ug/L	7,170	100%	300		4	4	4
Lead	ug/L	2.4	25%	25		0	1	4
Magnesium	ug/L	46,800	100%		(c)	0	4	4
Manganese	ug/L	297	100%	50	(a)	4	4	4
Mercury	ug/L	0.04	25%	0.7		0	1	4
Nickel	ug/L	9.4	75%	100		0	3	4
Potassium	ug/L	3,280	100%		(c)	0	4	4
Silver	ug/L	0.7	25%	50		0	1	4
Sodium	ug/L	13,400	100%	20,000		0	4	4
Thallium	ug/L	2.2	25%	2	(b)	1	1	4
Vanadium	ug/L	5.2	75%		(c)	0	3	4
Zinc	ug/L	22.5	100%	5,000	(a)	0	4	4
OTHER ANALYSES								
Nitrate/Nitrite-Nitrogen	mg/L	0.06	75%		(c)	0	3	4
Turbidity	NTU	431	100%		(c)	0	4	4

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class GA Groundwater, except as noted below.

a) USEPA Secondary Drinking Water Regulation, non-enforceable (EPA 822-B-00-001, Summer 2000)

b) USEPA Maximum Contaminant Limit announced 10/31/01. Source <http://www.epa.gov/safewater/arsenic.html>

c) No standard

NTU = nephelometric turbidity units

TABLE 11
Summary of Surface Water Analytical Results - SEAD 43/56/69
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC AWQS Class C ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs							
Acetone	ug/L	5	17%	NS	0	1	6
SVOCs							
4-Methylphenol	ug/L	1	17%	NS	0	1	6
bis(2-Ethylhexyl)phthalate	ug/L	150	17%	0.6	1	1	6
METALS							
Aluminum	ug/L	1,190	100%	100	4	6	6
Barium	ug/L	55.2	100%	NS	0	6	6
Beryllium	ug/L	0.1	17%	1,100	0	1	6
Cadmium	ug/L	0.34	33%	3.85	0	2	6
Calcium	ug/L	92,900	100%	NS	0	6	6
Chromium	ug/L	3.3	83%	140	0	5	6
Copper	ug/L	2.5	100%	17.36	0	6	6
Iron	ug/L	1,750	100%	300	3	6	6
Lead	ug/L	1.4	17%	8.7	0	1	6
Magnesium	ug/L	15,900	100%	NS	0	6	6
Manganese	ug/L	94.6	100%	NS	0	6	6
Mercury	ug/L	0.06	100%	0.77	0	6	6
Nickel	ug/L	277	100%	100.16	1	6	6
Potassium	ug/L	2,660	100%	NS	0	6	6
Sodium	ug/L	5,180	100%	NS	0	6	6
Vanadium	ug/L	2.1	33%	14	0	2	6
Zinc	ug/L	1,040	100%	159.6	1	6	6
OTHER ANALYSES							
Nitrite/Nirate-Nitrogen	mg/L	1.42	100%	10	0	5	5
Turbidity	NTU	31.2	100%	NS	0	6	6

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class C Surface Water.

Hardness dependent values assumed a hardness of 217 mg/L.

NS = No standard

NTU = Nephelometric turbidity unit

TABLE 12
Summary of Sediment Analytical Results - SEAD-43/56/69
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC Sediment Criteria ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs							
Acetone	ug/Kg	220	14%		0	1	5
2-Butanone	ug/Kg	49	29%		0	2	5
HERBICIDES							
2,4-DB	ug/Kg	110	14%		0	1	5
2,4,5-T	ug/Kg	23	57%		0	4	5
MCP	ug/Kg	17,000	29%		0	2	5
NITROAROMATICS							
HMX	ug/Kg	110	29%		0	2	5
METALS							
Aluminum	mg/Kg	19,600	71%		0	5	5
Antimony	mg/Kg	0.37	167%	2	0	5	5
Arsenic	mg/Kg	9	71%	6	2	5	5
Barium	mg/Kg	158	71%		0	5	5
Beryllium	mg/Kg	0.99	71%		0	5	5
Cadmium	mg/Kg	0.63	71%	0.6	1	5	5
Calcium	mg/Kg	68,900	71%		0	5	5
Chromium	mg/Kg	27.4	71%	26	1	5	5
Cobalt	mg/Kg	19.7	71%		0	5	5
Copper	mg/Kg	30.1	71%	16	5	5	5
Iron	mg/Kg	37,100	71%	20,000	5	5	5
Lead	mg/Kg	28.7	71%	31	0	5	5
Magnesium	mg/Kg	10,500	71%		0	5	5
Manganese	mg/Kg	1,480	71%	460	3	5	5
Mercury	mg/Kg	0.07	71%	0.15	0	5	5
Nickel	mg/Kg	44.3	71%	16	5	5	5
Potassium	mg/Kg	2,440	71%		0	5	5
Selenium	mg/Kg	1	14%		0	1	5
Sodium	mg/Kg	50	14%		0	1	5
Thallium	mg/Kg	0.75	43%		0	3	5
Vanadium	mg/Kg	37.4	71%		0	5	5
Zinc	mg/Kg	178	71%	120	3	5	5
OTHER ANALYSES							
Nitrate/Nitrite-Nitrogen	mg/Kg	0.15	80%				

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) Lowest Effect Level, NYSDEC Technical Guidance for Screening Contaminated Sediments - January 1999

TABLE 13
Summary of Soil Analytical Results - SEAD-44A
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum	Frequency	NYSDEC	Number	Number	Number
		Value	of	TAGM	of	of	of
			Detection	4046 ⁽²⁾	Exceedances	Detects	Analyses
VOCs							
1,1,2,2-Tetrachloroethane	ug/Kg	2	7%	600	0	1	15
2-Butanone	ug/Kg	28	7%	300	0	1	15
2-Hexanone	ug/Kg	4	7%		0	1	15
4-Methyl-2-Pentanone	ug/Kg	4	7%	1,000	0	1	15
Acetone	ug/Kg	200	40%	200	0	6	15
Toluene	ug/Kg	1	7%	1,500	0	1	15
NITROAROMATIC							
2,4,6-Trinitrotoluene	ug/Kg	110	7%		0	1	15
SVOCs							
2-Methylnaphthalene	ug/Kg	150	7%	36,400	0	1	15
4-Methylphenol	ug/Kg	250	13%	900	0	2	15
Acenaphthene	ug/Kg	380	40%	50,000	0	6	15
Acenaphthylene	ug/Kg	72	20%	41,000	0	3	15
Anthracene	ug/Kg	640	47%	50,000	0	7	15
Benzo(a)anthracene	ug/Kg	990	67%	224	4	10	15
Benzo(a)pyrene	ug/Kg	1,100	67%	61	9	10	15
Benzo(b)fluoranthene	ug/Kg	1,100	67%	1,100	0	10	15
Benzo(g,h,i)perylene	ug/Kg	510	60%	50,000	0	9	15
Benzo(k)fluoranthene	ug/Kg	1,100	67%	1,100	0	10	15
bis(2-Ethylhexyl)phthalate	ug/Kg	940	67%	50,000	0	10	15
Carbazole	ug/Kg	370	40%		0	6	15
Chrysene	ug/Kg	1,200	67%	400	4	10	15
Dibenz(a,h)anthracene	ug/Kg	160	27%	14	4	4	15
Dibenzofuran	ug/Kg	280	7%	6,200	0	1	15
Di-n-butylphthalate	ug/Kg	53	13%	8,100	0	2	15
Fluoranthene	ug/Kg	2,400	73%	50,000	0	11	15
Fluorene	ug/Kg	410	40%	50,000	0	6	15
Hexachlorobenzene	ug/Kg	36	13%	410	0	2	15
Indeno(1,2,3-cd)pyrene	ug/Kg	490	67%	3,200	0	10	15
Naphthalene	ug/Kg	330	13%	13,000	0	2	15
Phenanthrene	ug/Kg	2,100	67%	50,000	0	10	15
Pyrene	ug/Kg	2,000	73%	50,000	0	11	15
PESTICIDES/PCBs							
4,4'-DDE	ug/Kg	3.1	20%	2,100	0	3	15
4,4'-DDT	ug/Kg	5.6	20%	2,100	0	3	15
Dieldrin	ug/Kg	70	47%	44	2	7	15
Endosulfan I	ug/Kg	5.4	27%	900	0	4	15
Endosulfan II	ug/Kg	2.8	13%	900	0	2	15
Endrin	ug/Kg	3.5	7%	100	0	1	15
Endrin aldehyde	ug/Kg	4.5	13%		0	2	15
Endrin ketone	ug/Kg	5.2	7%		0	1	15
Heptachlor epoxide	ug/Kg	1.2	7%	20	0	1	15
METALS							
Aluminum	mg/Kg	17,500	100%	19,300	0	15	15
Antimony	mg/Kg	10.8	60%	5.9	2	9	15
Arsenic	mg/Kg	7.7	100%	8.2	0	15	15
Barium	mg/Kg	164	100%	300	0	15	15
Beryllium	mg/Kg	0.91	100%	1.1	0	15	15
Cadmium	mg/Kg	0.48	87%	2.3	0	13	15
Calcium	mg/Kg	77,400	100%	121,000	0	15	15
Chromium	mg/Kg	27.1	100%	29.6	0	15	15
Cobalt	mg/Kg	14.5	100%	30	0	15	15
Copper	mg/Kg	29	100%	33	0	15	15
Iron	mg/Kg	34,900	100%	36,500	0	15	15
Lead	mg/Kg	24.9	100%	24.8	1	15	15
Magnesium	mg/Kg	40,200	100%	21,500	1	15	15
Manganese	mg/Kg	956	87%	1,060	0	13	15
Mercury	mg/Kg	0.17	93%	0.1	2	14	15
Nickel	mg/Kg	41.8	100%	49	0	15	15
Potassium	mg/Kg	2,530	100%	2,380	1	15	15
Selenium	mg/Kg	1.7	100%	2	0	15	15
Sodium	mg/Kg	142	60%	172	0	9	15
Vanadium	mg/Kg	30.2	100%	150	0	15	15
Zinc	mg/Kg	115	100%	110	1	15	15
OTHER ANALYSES							
Nitrate/Nitrite-Nitrogen	mg/Kg	13	100%		0	15	15
Total Solids	% W/W	85.1	100%		0	15	15

Notes:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.

TABLE 14
Summary of Groundwater Analytical Results - SEAD-44A
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Frequency		Criteria Level ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
		Maximum Value	of Detection				
VOCs							
1,1,2,2-Tetrachloroethane	ug/L	3	33%	5	0	1	3
Acetone	ug/L	8	33%	50	0	1	3
METALS							
Aluminum	ug/L	2,240	100%	50 (a)	3	3	3
Arsenic	ug/L	4.1	33%	10 (b)	0	1	3
Barium	ug/L	104	100%	1,000	0	3	3
Beryllium	ug/L	0.23	33%	4 (b)	0	1	3
Calcium	ug/L	132,000	100%	(c)	0	3	3
Chromium	ug/L	4.8	67%	50	0	2	3
Cobalt	ug/L	4	67%	(c)	0	2	3
Copper	ug/L	4.5	67%	200	0	2	3
Iron	ug/L	4,810	100%	300	2	3	3
Lead	ug/L	4.1	33%	25	0	1	3
Magnesium	ug/L	75,600	100%	(c)	0	3	3
Manganese	ug/L	217	100%	50 (a)	2	3	3
Mercury	ug/L	0.06	67%	0.7	0	2	3
Nickel	ug/L	12.3	67%	100	0	2	3
Potassium	ug/L	6,160	100%	(c)	0	3	3
Silver	ug/L	0.63	33%	50	0	1	3
Sodium	ug/L	18,900	100%	20,000	0	3	3
Vanadium	ug/L	4.7	100%	(c)	0	3	3
Zinc	ug/L	12.8	100%	5,000 (a)	0	3	3
OTHER ANALYSES							
Nitrate/Nitrite-Nitrogen	mg/L	0.10	67%	10	0	2	3
Turbidity	NTU	693	100%	(c)	0	3	3

Notes:

- (1) Only compounds that were detected were included in this list of parameters.
(2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class GA Groundwater, except as noted below.
a) USEPA Secondary Drinking Water Regulation, non-enforceable (EPA 822-B-00-001, Summer 2000)
b) USEPA Maximum Contaminant Limit announced 10/31/01. Source <http://www.epa.gov/safewater/arsenic.html>
c) No standard

NTU = Nephelometric turbidity unit

TABLE 15
Summary of Surface Water Analytical Results - SEAD-44A
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC AWQS Class C ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
METALS							
Aluminum	ug/L	476	100%	100	4	4	4
Barium	ug/L	50.4	100%	NS	0	4	4
Cadmium	ug/L	0.23	25%	3.85	0	1	4
Calcium	ug/L	156,000	100%	NS	0	4	4
Chromium	ug/L	1	100%	140	0	4	4
Cobalt	ug/L	1.1	25%	5	0	1	4
Copper	ug/L	4.7	100%	17.36	0	4	4
Iron	ug/L	632	100%	300	4	4	4
Lead	ug/L	2.2	50%	8.7	0	2	4
Magnesium	ug/L	22,500	100%	NS	0	4	4
Manganese	ug/L	165	100%	NS	0	4	4
Mercury	ug/L	0.05	75%	0.77	0	3	4
Nickel	ug/L	174	100%	100.16	1	4	4
Potassium	ug/L	3,600	100%	NS	0	4	4
Sodium	ug/L	3,420	100%	NS	0	4	4
Vanadium	ug/L	1	50%	14	0	2	4
Zinc	ug/L	1,050	100%	159.6	1	4	4
OTHER ANALYSES							
Nitrate/Nitrite-Nitrogen	mg/L	0.06	100%	NS	0	4	4
Turbidity	NTU	14.2	100%	NS	0	4	4

Notes:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class C Surface Water.
Hardness dependent values assumed a hardness of 217 mg/L.
NS = No standard
NTU = Nephelometric turbidity unit

TABLE 16
Summary of Sediment Analytical Results - SEAD-44A
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC Sediment Criteria ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
SVOCs							
bis(2-Ethylhexyl)phthalate	ug/Kg	34	25%	7,300	0	1	4
Di-n-butylphthalate	ug/Kg	72	25%		0	1	4
METALS							
Aluminum	mg/Kg	14,000	100%		0	4	4
Antimony	mg/Kg	0.4	50%	2	0	2	4
Arsenic	mg/Kg	5.4	100%	6	0	4	4
Barium	mg/Kg	121	100%		0	4	4
Beryllium	mg/Kg	0.71	100%		0	4	4
Cadmium	mg/Kg	0.41	100%	0.6	0	4	4
Calcium	mg/Kg	79,400	100%		0	4	4
Chromium	mg/Kg	20.7	100%	26	0	4	4
Cobalt	mg/Kg	11	100%		0	4	4
Copper	mg/Kg	25.6	100%	16	4	4	4
Iron	mg/Kg	26,300	100%	20,000	3	4	4
Lead	mg/Kg	13.6	100%	31	0	4	4
Magnesium	mg/Kg	12,900	100%		0	4	4
Manganese	mg/Kg	510	100%	460	2	4	4
Mercury	mg/Kg	0.07	100%	0.15	0	4	4
Nickel	mg/Kg	31.9	100%	16	4	4	4
Potassium	mg/Kg	2,760	100%		0	4	4
Sodium	mg/Kg	69.7	50%		0	2	4
Thallium	mg/Kg	0.53	25%		0	1	4
Vanadium	mg/Kg	24	100%		0	4	4
Zinc	mg/Kg	83.9	100%	120	0	4	4
OTHER ANALYSES							
Nitrate/Nitrite-Nitrogen	mg/Kg	1.39	100%		0	4	4
Total Solids	% W/W	71.1	100%		0	4	4

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Technical Guidance for Screening Contaminated Sediments - January 1999

(based on average organic carbon level of 3.65% in sediment determined in Seneca SEAD 16/17 RI Report, Parsons ES, 1998)
Chronic toxicity sediment criteria for benthic aquatic life.

TABLE 17
Summary of Soil Analytical Results - SEAD-44B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs							
Acetone	ug/Kg	47	100%	200	0	3	3
2-Butanone	ug/Kg	10	33%	300	0	1	3
SVOCs							
Anthracene	ug/Kg	35	33%	50,000	0	1	3
Benzo(a)anthracene	ug/Kg	130	67%	224	0	2	3
Benzo(a)pyrene	ug/Kg	98	67%	61	1	2	3
Benzo(b)fluoranthene	ug/Kg	99	67%	1,100	0	2	3
Benzo(g,h,i)perylene	ug/Kg	56	33%	50,000	0	1	3
Benzo(k)fluoranthene	ug/Kg	110	67%	1,100	0	2	3
bis(2-Ethylhexyl)phthalate	ug/Kg	42	67%	50,000	0	2	3
Chrysene	ug/Kg	150	67%	400	0	2	3
Dibenz(a,h)anthracene	ug/Kg	28	33%	14	1	1	3
Fluoranthene	ug/Kg	350	67%	50,000	0	2	3
Indeno(1,2,3-cd)pyrene	ug/Kg	64	67%	3,200	0	2	3
Phenanthrene	ug/Kg	330	67%	50,000	0	2	3
Pyrene	ug/Kg	380	67%	50,000	0	2	3
PESTICIDES/PCBs							
4,4'-DDD	ug/Kg	28	33%	2,900	0	1	3
4,4'-DDE	ug/Kg	48	33%	2,100	0	1	3
4,4'-DDT	ug/Kg	27	33%	2,100	0	1	3
Dieldrin	ug/Kg	57	33%	44	1	1	3
Endosulfan I	ug/Kg	2	33%	900	0	1	3
METALS							
Aluminum	mg/Kg	16,400	100%	19,300	0	3	3
Arsenic	mg/Kg	13.1	100%	8.2	1	3	3
Barium	mg/Kg	136	100%	300	0	3	3
Beryllium	mg/Kg	0.77	100%	1.1	0	3	3
Cadmium	mg/Kg	0.34	100%	2.3	0	3	3
Calcium	mg/Kg	33,300	100%	121,000	0	3	3
Chromium	mg/Kg	20.7	100%	29.6	0	3	3
Cobalt	mg/Kg	10.8	100%	30	0	3	3
Copper	mg/Kg	26.2	100%	33	0	3	3
Iron	mg/Kg	24,100	100%	36,500	0	3	3
Lead	mg/Kg	39.5	100%	24.8	1	3	3
Magnesium	mg/Kg	9,660	100%	21,500	0	3	3
Manganese	mg/Kg	372	100%	1,060	0	3	3
Mercury	mg/Kg	0.04	100%	0.1	0	3	3
Nickel	mg/Kg	34.8	100%	49	0	3	3
Potassium	mg/Kg	1,880	100%	2,380	0	3	3
Selenium	mg/Kg	1.2	100%	2	0	3	3
Sodium	mg/Kg	43.2	33%	172	0	1	3
Vanadium	mg/Kg	28	100%	150	0	3	3
Zinc	mg/Kg	145	100%	110	1	3	3
OTHER ANALYSES							
Nitrate/Nitrite-Nitrogen	mg/Kg	0.47	100%		0	3	3

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.

TABLE 18
Summary of Groundwater Analytical Results - SEAD-44B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	Criteria Level ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
METALS							
Aluminum	ug/L	1,230	100%	50 (a)	3	3	3
Barium	ug/L	77.7	100%	1,000	0	3	3
Calcium	ug/L	120,000	100%	(c)	0	3	3
Chromium	ug/L	2.5	33%	50	0	1	3
Cobalt	ug/L	1.8	67%	(c)	0	2	3
Copper	ug/L	2.4	33%	200	0	1	3
Iron	ug/L	2,340	100%	300	2	3	3
Magnesium	ug/L	32,900	100%	(c)	0	3	3
Manganese	ug/L	219	100%	50 (a)	2	3	3
Nickel	ug/L	4.4	67%	100	0	2	3
Potassium	ug/L	2,910	100%	(c)	0	3	3
Silver	ug/L	0.7	67%	50	0	2	3
Sodium	ug/L	8,350	100%	20,000	0	3	3
Thallium	ug/L	4.7	33%	2 (b)	1	1	3
Vanadium	ug/L	2.7	67%	(c)	0	2	3
Zinc	ug/L	10.4	67%	5,000 (a)	0	2	3
OTHER ANALYSES							
Nitrate/Nitrite-Nitrogen	mg/L	0.13	100%	10	0	3	3
Turbidity	NTU	67.0	100%	(c)	0	3	3

Notes:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class GA Groundwater, except as noted below.
 - a) USEPA Secondary Drinking Water Regulation, non-enforceable (EPA 822-B-00-001, Summer 2000)
 - b) USEPA Maximum Contaminant Limit announced 10/31/01. Source <http://www.epa.gov/safewater/arsenic.html>
 - c) No standard

NTU = Nephelometric turbidity unit

TABLE 19
Summary of Surface Water Analytical Results - SEAD-44B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC AWQS Class C ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
METALS							
Aluminum	ug/L	76.5	100%	100	0	2	2
Arsenic	ug/L	11.6	100%	150	0	2	2
Barium	ug/L	34	100%	NS	0	2	2
Calcium	ug/L	93,000	100%	NS	0	2	2
Copper	ug/L	2.2	100%	17.36	0	2	2
Iron	ug/L	79.8	100%	300	0	2	2
Magnesium	ug/L	9,070	100%	NS	0	2	2
Manganese	ug/L	5.3	100%	NS	0	2	2
Mercury	ug/L	0.05	100%	0.77	0	2	2
Nickel	ug/L	0.68	100%	100.16	0	2	2
Potassium	ug/L	3,290	100%	NS	0	2	2
Sodium	ug/L	73,200	100%	NS	0	2	2
Zinc	ug/L	2.2	100%	159.6	0	2	2
OTHER ANALYSES							
Nitrate/Nitrite-Nitrogen	mg/L	0.01	50%	NS	0	1	2
Turbidity	NTU	2.9	100%	NS	0	2	2

Notes:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class C Surface Water.
Hardness dependent values assumed a hardness of 217 mg/L.
NS = No Standard
NTU = Nephelometric turbidity unit

TABLE 20
Summary of Sediment Analytical Results - SEAD-44B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC Sediment Criteria ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs							
2-Butanone	ug/Kg	12	50%		0	1	2
SVOCs							
Di-n-butylphthalate	ug/Kg	110	100%		0	2	2
METALS							
Aluminum	mg/Kg	13,000	100%		0	2	2
Antimony	mg/Kg	0.37	50%	2	0	1	2
Arsenic	mg/Kg	58.3	100%	6	2	2	2
Barium	mg/Kg	93.8	100%		0	2	2
Beryllium	mg/Kg	0.66	100%		0	2	2
Cadmium	mg/Kg	0.38	100%	0.6	0	2	2
Calcium	mg/Kg	8,780	100%		0	2	2
Chromium	mg/Kg	19.8	100%	26	0	2	2
Cobalt	mg/Kg	11.9	100%		0	2	2
Copper	mg/Kg	19.1	100%	16	1	2	2
Iron	mg/Kg	28,400	100%	20,000	1	2	2
Lead	mg/Kg	17.7	100%	31	0	2	2
Magnesium	mg/Kg	4,880	100%		0	2	2
Manganese	mg/Kg	679	100%	460	1	2	2
Mercury	mg/Kg	0.06	100%	0.15	0	2	2
Nickel	mg/Kg	28.4	100%	16	2	2	2
Potassium	mg/Kg	1,500	100%		0	2	2
Sodium	mg/Kg	378	100%		0	2	2
Vanadium	mg/Kg	23.8	100%		0	2	2
Zinc	mg/Kg	76.3	100%	120	0	2	2
OTHER ANALYSES							
Nitrate/Nitrite-Nitrogen	mg/Kg	0.06	100%		0	2	2

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) Lowest Effect Level, NYSDEC Technical Guidance for Screening Contaminated Sediments - January 1999

TABLE 21
Summary of Soil Analytical Results - SEAD-52
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
NITROAROMATICS							
Tetryl	ug/Kg	150	5%	NS	0	1	19
2,4,6-Trinitrotoluene	ug/Kg	410	11%	NS	0	2	19
2,4-Dinitrotoluene	ug/Kg	2,100	53%	NS	0	10	19

NOTES:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.
 NS = No standard.

TABLE 22
Summary of Soil Analytical Results - SEAD-62
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
SVOCs							
Fluoranthene	ug/Kg	46	33%	50,000	0	1	3
Pyrene	ug/Kg	47	33%	50,000	0	1	3
Herbicides							
2,4,5-T	ug/Kg	10	67%	1,900	0	2	3
Dicamba	ug/Kg	9.3	33%	NS	0	1	3
Metals							
Aluminum	mg/Kg	16,100	100%	19,300	0	3	3
Antimony	mg/Kg	0.21	33%	5.9	0	1	3
Arsenic	mg/Kg	8.4	100%	8.2	1	3	3
Barium	mg/Kg	202	100%	300	0	3	3
Beryllium	mg/Kg	0.74	100%	1.1	0	3	3
Cadmium	mg/Kg	0.68	100%	2.3	0	3	3
Calcium	mg/Kg	67,900	100%	121,000	0	3	3
Chromium	mg/Kg	28.8	100%	29.6	0	3	3
Cobalt	mg/Kg	12.6	100%	30	0	3	3
Copper	mg/Kg	28.7	100%	33	0	3	3
Iron	mg/Kg	30,300	100%	36,500	0	3	3
Magnesium	mg/Kg	20,500	100%	21,500	0	3	3
Manganese	mg/Kg	778	100%	1,060	0	3	3
Mercury	mg/Kg	0.11	100%	0.1	1	3	3
Nickel	mg/Kg	29.6	100%	49	0	3	3
Potassium	mg/Kg	2,970	100%	2,380	1	3	3
Selenium	mg/Kg	1.3	67%	2	0	2	3
Sodium	mg/Kg	164	100%	172	0	3	3
Vanadium	mg/Kg	33.1	100%	150	0	3	3
Zinc	mg/Kg	218	100%	110	2	3	3

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994,

which are a To Be Considered (TBC) criteria.

NS = No standard.

TABLE 23
Summary of Groundwater Analytical Results - SEAD-62
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	Criteria Level ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs							
Benzene	ug/L	2	67%	1	2	2	3
Herbicides							
2,4,5-T	ug/L	0.12	33%	35	0	1	3
Metals							
Aluminum	ug/L	499	100%	50 (a)	3	3	3
Barium	ug/L	68.1	100%	1,000	0	3	3
Calcium	ug/L	104,000	100%	(c)	0	3	3
Chromium	ug/L	1.4	67%	50	0	2	3
Cobalt	ug/L	2.5	100%	(c)	0	3	3
Copper	ug/L	0.54	33%	200	0	1	3
Iron	ug/L	1,160	100%	300	3	3	3
Magnesium	ug/L	58,200	100%	(c)	0	3	3
Manganese	ug/L	271	100%	50 (a)	3	3	3
Mercury	ug/L	0.05	100%	0.7	0	3	3
Nickel	ug/L	3.9	67%	100	0	2	3
Potassium	ug/L	7,470	100%	(c)	0	3	3
Sodium	ug/L	18,100	100%	20,000	0	3	3
Thallium	ug/L	2.4	33%	2 (b)	1	1	3
Vanadium	ug/L	1.8	100%	(c)	0	3	3
Zinc	ug/L	6.2	100%	5000 (a)	0	3	3

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class GA Groundwater, except as noted below.

a) USEPA Secondary Drinking Water Regulation, non-enforceable (EPA 822-B-00-001, Summer 2000)

b) USEPA Maximum Contaminant Limit announced 10/31/01. Source <http://www.epa.gov/safewater/arsenic.html>

c) No standard

NS = No standard

TABLE 24
Summary of Soil Analytical Results - SEAD-64B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum	Frequency	NYSDEC	Number	Number	Number
		Value	of	TAGM	of	of	of
			Detection	4046 ⁽²⁾	Exceedances	Detects	Analyses
VOCs							
Acetone	ug/Kg	57	17%	200	0	2	12
Carbon disulfide	ug/Kg	1	8%	2,700	0	1	12
Methyl ethyl ketone	ug/Kg	22	8%	300	0	1	12
Methylene chloride	ug/Kg	1	8%	100	0	1	12
SVOCs							
Benzo(a)anthracene	ug/Kg	38	17%	224	0	2	12
Benzo(a)pyrene	ug/Kg	34	25%	61	0	3	12
Benzo(b)fluoranthene	ug/Kg	28	25%	1,100	0	3	12
Benzo(ghi)perylene	ug/Kg	20	17%	50,000	0	2	12
Benzo(k)fluoranthene	ug/Kg	36	25%	1,100	0	3	12
Bis(2-Ethylhexyl)phthalate	ug/Kg	96	42%	50,000	0	5	12
Chrysene	ug/Kg	40	25%	400	0	3	12
Di-n-butylphthalate	ug/Kg	120	58%	8,100	0	7	12
Indeno(1,2,3-cd)pyrene	ug/Kg	29	8%	3200	0	1	12
Fluoranthene	ug/Kg	35	42%	50,000	0	5	12
Phenanthrene	ug/Kg	30	17%	50,000	0	2	12
Pyrene	ug/Kg	36	25%	50,000	0	3	12
PESTICIDES/PCBs							
4,4'-DDE	ug/Kg	2.6	8%	2,100	0	1	12
4,4'-DDT	ug/Kg	2.6	8%	2,100	0	1	12
Aldrin	ug/Kg	1.6	8%	41	0	1	12
Heptachlor epoxide	ug/Kg	1.4	8%	20	0	1	12
METALS							
Aluminum	mg/Kg	13,400	100%	19,300	0	12	12
Antimony	mg/Kg	0.3	25%	5.9	0	3	12
Arsenic	mg/Kg	5.8	100%	8.2	0	12	12
Barium	mg/Kg	75.9	100%	300	0	12	12
Beryllium	mg/Kg	0.56	100%	1.1	0	12	12
Cadmium	mg/Kg	0.63	100%	2.3	0	12	12
Calcium	mg/Kg	54,800	100%	121,000	0	12	12
Chromium	mg/Kg	17.5	100%	29.6	0	12	12
Cobalt	mg/Kg	8.9	100%	30	0	12	12
Copper	mg/Kg	21.5	100%	33	0	12	12
Iron	mg/Kg	20,900	100%	36,500	0	12	12
Lead	mg/Kg	21.4	100%	24.8	0	12	12
Magnesium	mg/Kg	22,100	100%	21,500	1	12	12
Manganese	mg/Kg	414	100%	1,060	0	12	12
Mercury	mg/Kg	0.05	75%	0.1	0	9	12
Nickel	mg/Kg	26.2	100%	49	0	12	12
Potassium	mg/Kg	2,160	100%	2,380	0	12	12
Selenium	mg/Kg	0.99	42%	2	0	5	12
Sodium	mg/Kg	65.8	92%	172	0	11	12
Thallium	mg/Kg	0.41	17%	0.7	0	2	12
Vanadium	mg/Kg	23.3	100%	150	0	12	12
Zinc	mg/Kg	78.8	100%	110	0	12	12

NOTES:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.
- NS = No standard

TABLE 25
Summary of Groundwater Analytical Results - SEAD-64B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	Criteria Level ⁽²⁾		Number of Exceedances	Number of Detects	Number of Analyses
METALS								
Aluminum	ug/L	1,530	100%	50	(a)	3	3	3
Arsenic	ug/L	2.2	33%	3		0	1	3
Barium	ug/L	124	100%	1,000		0	3	3
Calcium	ug/L	200,000	100%		(b)	0	3	3
Chromium	ug/L	3.1	67%	50		0	2	3
Cobalt	ug/L	4.4	100%		(b)	0	3	3
Copper	ug/L	3.1	100%	200		0	3	3
Iron	ug/L	5,090	100%	300		2	3	3
Magnesium	ug/L	76,000	100%		(b)	0	3	3
Manganese	ug/L	559	100%	50	(a)	3	3	3
Nickel	ug/L	7	100%	100		0	3	3
Potassium	ug/L	4,780	100%		(b)	0	3	3
Selenium	ug/L	2.7	33%	10		0	1	3
Sodium	ug/L	17,800	100%	20,000		0	3	3
Vanadium	ug/L	2.9	100%		(b)	0	3	3
Zinc	ug/L	16.6	100%	5,000	(a)	0	3	3

NOTES:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class GA Groundwater, except as noted below.

a) USEPA Secondary Drinking Water Regulation, non-enforceable (EPA 822-B-00-001, Summer 2000)

b) No standard

TABLE 26
Summary of Surface Water Analytical Results-SEAD-64B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC AWQS Class C ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs							
Carbon Disulfide	ug/L	2	33%	NS	0	1	3
METALS							
Aluminum	ug/L	141	67%	100	1	2	3
Barium	ug/L	37.8	100%	NS	0	3	3
Calcium	ug/L	61,200	100%	NS	0	3	3
Chromium	ug/L	0.42	67%	140	0	2	3
Copper	ug/L	1.5	100%	17.36	0	3	3
Iron	ug/L	331	100%	300	1	3	3
Magnesium	ug/L	10,900	100%	NS	0	3	3
Manganese	ug/L	39.2	100%	NS	0	3	3
Nickel	ug/L	1.2	67%	100.16	0	2	3
Potassium	ug/L	1,180	100%	NS	0	3	3
Sodium	ug/L	3,050	100%	NS	0	3	3
Zinc	ug/L	7.7	100%	159.6	0	3	3
OTHER ANALYSES							
pH	Standard Units	7.9	100%	NS	0	3	3
Conductivity	umhos/cm	293	100%	NS	0	3	3
Temperature	°C	16	100%	NS	0	3	3
Turbidity	NTU	0.6	100%	NS	0	3	3

NOTES:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class C Surface Water.

Hardness dependent values assumed a hardness of 217 mg/L.

NS = No standard

NTU = nephelometric turbidity units.

TABLE 27
Summary of Sediment Analytical Results-SEAD-64B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC Sediment Criteria ⁽²⁾		Number of Exceedances	Number of Detects	Number of Analyses
VOCs								
Methylene chloride	ug/Kg	6	100%			0	3	3
SVOCs								
Benzo(a)pyrene	ug/Kg	29	33%	50.8 (a)		0	1	3
Benzo(b)fluoranthene	ug/Kg	39	33%	50.8 (a)		0	1	3
Benzo(k)fluoranthene	ug/Kg	30	33%	50.8 (a)		0	1	3
Bis(2-Ethylhexyl)phthalate	ug/Kg	79	67%	7,801 (a)		0	2	3
Fluoranthene	ug/Kg	55	33%	39,887 (a)		0	1	3
Phenanthrene	ug/Kg	31	33%	4,692 (a)		0	1	3
Pyrene	ug/Kg	32	33%	37,580 (a)		0	1	3
PESTICIDES/PCBs								
4,4'-DDE	ug/Kg	3.3	33%	0.39 (a)		1	1	3
Endosulfan I	ug/Kg	2.4	33%	1.17 (a)		1	1	3
Heptachlor	ug/Kg	1.1	33%	0.031 (a)		1	1	3
METALS								
Aluminum	mg/Kg	12,800	100%			0	3	3
Antimony	mg/Kg	0.25	33%	2 (b)		0	1	3
Arsenic	mg/Kg	7.5	100%	6 (b)		1	3	3
Barium	mg/Kg	102	100%			0	3	3
Beryllium	mg/Kg	0.67	100%			0	3	3
Cadmium	mg/Kg	0.45	100%	0.6 (b)		0	3	3
Calcium	mg/Kg	75,900	100%			0	3	3
Chromium	mg/Kg	19.3	100%	26 (b)		0	3	3
Cobalt	mg/Kg	11.8	100%			0	3	3
Copper	mg/Kg	27	100%	16 (b)		2	3	3
Iron	mg/Kg	28,100	100%	20,000 (b)		1	3	3
Lead	mg/Kg	16.5	100%	31 (b)		0	3	3
Magnesium	mg/Kg	14,100	100%			0	3	3
Manganese	mg/Kg	684	100%	460 (b)		1	3	3
Mercury	mg/Kg	0.19	100%	0.15 (b)		1	3	3
Nickel	mg/Kg	32	100%	16 (b)		3	3	3
Potassium	mg/Kg	2,190	100%			0	3	3
Sodium	mg/Kg	35.5	33%			0	1	3
Vanadium	mg/Kg	25.9	100%			0	3	3
Zinc	mg/Kg	82.2	100%	120 (b)		0	3	3

NOTES:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Technical Guidance for Screening Contaminated Sediments - January 1999

a) Benthic Aquatic Life Chronic Toxicity Criteria

b) Lowest Effect Level

All organic criteria values derived based on assumed Total Organic Carbon content of 39,105 mg/Kg (SEDA average value).

TABLE 28
Summary of Soil Analytical Results - SEAD-64C
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Unit	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
SVOCs							
Bis(2-Ethylhexyl)phthalate	ug/Kg	1,100	80%	50,000	0	8	10
Di-n-butylphthalate	ug/Kg	39	40%	8,100	0	4	10
Pesticides/PCBs							
Dieldrin	ug/Kg	4.7	10%	44	0	1	10
Heptachlor	ug/Kg	2.6	10%	100	0	1	10
Metals							
Aluminum	mg/Kg	18,700	100%	19,300	0	10	10
Antimony	mg/Kg	0.43	20%	5.9	0	2	10
Arsenic	mg/Kg	6.6	100%	8.2	0	10	10
Barium	mg/Kg	243	100%	300	0	10	10
Beryllium	mg/Kg	0.86	100%	1.1	0	10	10
Cadmium	mg/Kg	1	100%	2.3	0	10	10
Calcium	mg/Kg	129,000	100%	121,000	1	10	10
Chromium	mg/Kg	25.9	100%	29.6	0	10	10
Cobalt	mg/Kg	13.9	100%	30	0	10	10
Copper	mg/Kg	28.7	100%	33	0	10	10
Iron	mg/Kg	29,000	100%	36,500	0	10	10
Lead	mg/Kg	23.3	100%	24.8	0	10	10
Magnesium	mg/Kg	29,700	100%	21,500	2	10	10
Manganese	mg/Kg	2,220	100%	1,060	2	10	10
Mercury	mg/Kg	0.05	100%	0.1	0	10	10
Nickel	mg/Kg	41.1	100%	49	0	10	10
Potassium	mg/Kg	2,690	100%	2,380	1	10	10
Selenium	mg/Kg	1.9	50%	2	0	5	10
Sodium	mg/Kg	93.8	80%	172	0	8	10
Vanadium	mg/Kg	32.5	100%	150	0	10	10
Zinc	mg/Kg	110	100%	110	0	10	10

Notes:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.

TABLE 29
Summary of Groundwater Analytical Results - SEAD-64C
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Unit	Maximum Value	Frequency of Detection	Criteria Level ⁽²⁾		Number of Exceedances	Number of Detects	Number of Analyses
SVOCs								
Diethyl phthalate	ug/L	0.7	20%	(c)		0	1	5
Phenol	ug/L	2	40%	1		2	2	5
Metals								
Aluminum	ug/L	811	100%	50	(a)	3	5	5
Barium	ug/L	106	100%	1,000		0	5	5
Calcium	ug/L	121,000	100%	(c)		0	5	5
Chromium	ug/L	2.5	60%	50		0	3	5
Cobalt	ug/L	5.5	60%	(c)		0	3	5
Copper	ug/L	1.7	100%	200		0	5	5
Iron	ug/L	2,640	100%	300		4	5	5
Lead	ug/L	6.4	20%	25		0	1	5
Magnesium	ug/L	49,400	100%	(c)		0	5	5
Manganese	ug/L	149	100%	50	(a)	3	5	5
Mercury	ug/L	0.14	60%	0.7		0	3	5
Nickel	ug/L	2.3	60%	100		0	3	5
Potassium	ug/L	3,830	100%	(c)		0	5	5
Sodium	ug/L	30,400	100%	20,000		1	5	5
Thallium	ug/L	2.1	20%	2	(b)	1	1	5
Vanadium	ug/L	2	100%	(c)		0	5	5
Zinc	ug/L	6	100%	5,000	(a)	0	5	5

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations

(TOGS 1.1.1, Revised June 2004), Class GA Groundwater, except as noted below.

a) USEPA Secondary Drinking Water Regulation, non-enforceable (EPA 822-B-00-001, Summer 2000)

b) USEPA Maximum Contaminant Limit announced 10/31/01. Source <http://www.epa.gov/safewater/arsenic.html>

c) No standard

TABLE 30
Summary of Soil Analytical Results - SEAD-64D
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Unit	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCs							
Methyl ethyl ketone	ug/Kg	8	3%	300	0	1	36
Methylene chloride	ug/Kg	3	22%	100	0	8	36
Toluene	ug/Kg	1	3%	1,500	0	1	36
SVOCs							
2-Methylnaphthalene	ug/Kg	49	14%	36,400	0	5	36
Benzo(a)anthracene	ug/Kg	86	22%	224	0	8	36
Benzo(a)pyrene	ug/Kg	77	25%	61	3	9	36
Benzo(b)fluoranthene	ug/Kg	160	25%	1,100	0	9	36
Benzo(ghi)perylene	ug/Kg	68	17%	50,000	0	6	36
Benzo(k)fluoranthene	ug/Kg	110	19%	1,100	0	7	36
Bis(2-Ethylhexyl)phthalate	ug/Kg	1,100	42%	50,000	0	15	36
Chrysene	ug/Kg	110	28%	400	0	10	36
Di-n-butylphthalate	ug/Kg	77	44%	8,100	0	16	36
Di-n-octylphthalate	ug/Kg	75	3%	50,000	0	1	36
Dibenz(a,h)anthracene	ug/Kg	40	14%	14	5	5	36
Fluoranthene	ug/Kg	240	44%	50,000	0	16	36
Indeno(1,2,3-cd)pyrene	ug/Kg	61	17%	3,200	0	6	36
Naphthalene	ug/Kg	31	6%	13,000	0	2	36
Phenanthrene	ug/Kg	100	33%	50,000	0	12	36
Phenol	ug/Kg	42	3%	30	1	1	36
Pyrene	ug/Kg	160	42%	50,000	0	15	36
Metals							
Aluminum	mg/Kg	20,800	100%	19,300	3	36	36
Antimony	mg/Kg	0.49	25%	5.9	0	9	36
Arsenic	mg/Kg	7.8	100%	8.2	0	36	36
Barium	mg/Kg	152	100%	300	0	36	36
Beryllium	mg/Kg	0.99	100%	1.1	0	36	36
Cadmium	mg/Kg	0.97	100%	2.3	0	36	36
Calcium	mg/Kg	162,000	100%	121,000	3	36	36
Chromium	mg/Kg	29.6	100%	29.6	0	36	36
Cobalt	mg/Kg	18.6	100%	30	0	36	36
Copper	mg/Kg	32.7	100%	33	0	36	36
Iron	mg/Kg	36,600	100%	36,500	1	36	36
Lead	mg/Kg	60.7	100%	24.8	3	36	36
Magnesium	mg/Kg	16,300	100%	21,500	0	36	36
Manganese	mg/Kg	1790	100%	1,060	2	36	36
Mercury	mg/Kg	0.08	69%	0.1	0	25	36
Nickel	mg/Kg	41.8	100%	49	0	36	36
Potassium	mg/Kg	3,240	100%	2,380	3	36	36
Selenium	mg/Kg	2	81%	2	0	29	36
Sodium	mg/Kg	266	86%	172	1	31	36
Thallium	mg/Kg	0.76	44%	0.7	2	16	36
Vanadium	mg/Kg	35.3	100%	150	0	36	36
Zinc	mg/Kg	111	100%	110	1	36	36

Notes:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.

TABLE 31
Summary of Groundwater Analytical Results - SEAD-64D
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Unit	Maximum Value	Frequency of Detection	Criteria Level ⁽²⁾		Number of Exceedances	Number of Detects	Number of Analyses
Metals								
Aluminum	ug/L	30,100	100%	50	(a)	5	5	5
Antimony	ug/L	1.5	20%	3		0	1	5
Arsenic	ug/L	10	20%	10	(b)	0	1	5
Barium	ug/L	693	100%	1,000		0	5	5
Beryllium	ug/L	3.1	20%	4	(b)	0	1	5
Cadmium	ug/L	1.3	40%	5		0	2	5
Calcium	ug/L	902,000	100%		(c)	0	5	5
Chromium	ug/L	47.1	80%	50		0	4	5
Cobalt	ug/L	82.3	100%		(c)	0	5	5
Copper	ug/L	41.3	80%	200		0	4	5
Iron	ug/L	65,800	100%	300		5	5	5
Lead	ug/L	71.6	40%	25		1	2	5
Magnesium	ug/L	35,900	100%		(c)	0	5	5
Manganese	ug/L	8,250	100%	50	(a)	5	5	5
Mercury	ug/L	0.05	40%	0.7		0	2	5
Nickel	ug/L	108	100%	100		1	5	5
Potassium	ug/L	7,080	100%		(c)	0	5	5
Sodium	ug/L	12,300	100%	20,000		0	5	5
Thallium	ug/L	3.2	60%	2	(b)	3	3	5
Vanadium	ug/L	42.9	100%		(c)	0	5	5
Zinc	ug/L	305	100%	5,000	(a)	0	5	5

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class GA Groundwater, except as noted below.

a) USEPA Secondary Drinking Water Regulation, non-enforceable (EPA 822-B-00-001, Summer 2000)

b) USEPA Maximum Contaminant Limit announced 10/31/01. Source <http://www.epa.gov/safewater/arsenic.html>

c) No standard

TABLE 32
Summary of TCRA Soil Analytical Results - SEAD-67
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

AREA 1				Floor Samples			Perimeter Samples		
Parameters	Units	Cleanup Goal ¹	Total No. of Samples Collected	No. of Samples Collected	No. of Exceedences	Max Result	No. of Samples Collected	No. of Exceedences	Max Result
Metals									
Aluminum	mg/Kg	19,200	5	1	0	12,100	4	0	16,000
Antimony	mg/Kg	5.9	5	1	0	0.56 U	4	1	13.6 U
Arsenic	mg/Kg	8.24	23	7	0	5.8	16	0	7.1
Barium	mg/Kg	300	5	1	0	53.7	4	0	99.5
Beryllium	mg/Kg	1.1	5	1	0	0.65 B	4	1	1.2
Cadmium	mg/Kg	2.3	5	1	0	0.49 U	4	1	3.5 U
Calcium	mg/Kg	120,500	5	1	0	1,770	4	0	3,440
Chromium	mg/Kg	29	5	1	0	18.1	4	0	25.6
Cobalt	mg/Kg	30	5	1	0	10.8	4	0	15.7
Copper	mg/Kg	29.6	5	1	0	15.9	4	1	36.6
Iron	mg/Kg	35,550	5	1	0	24,500	4	0	35,300
Lead ²	mg/Kg	400	5	1	0	11.6	4	0	25.8
Magnesium	mg/Kg	21,500	5	1	0	3,810	4	0	5,200
Manganese	mg/Kg	1,056	5	1	0	445	4	0	959
Mercury	mg/Kg	0.1	22	7	0	0.079 B	15	3	0.32
Nickel	mg/Kg	48.9	5	1	0	26.3	4	0	41.9
Potassium	mg/Kg	2,343	5	1	0	649	4	0	1,290
Selenium	mg/Kg	2	5	1	0	0.79 U	4	1	18.6 U
Silver	mg/Kg	0.763	5	1	0	0.16 U	4	0	0.41 J
Sodium	mg/Kg	170.3	5	1	0	56.4	4	0	82.8 J
Thallium	mg/Kg	0.67	5	1	1	0.98 U	4	4	25.5 U
Vanadium	mg/Kg	150	5	1	0	18.5	4	0	24.9
Zinc	mg/Kg	108.9	23	7	0	72.8	16	0	85.1
PAHs									
2-Methylnaphthalene	ug/Kg	36,400	10	2	0	34 U	8	0	420 U
Acenaphthene	ug/Kg	50,000	10	2	0	18 U	8	0	420 U
Acenaphthylene	ug/Kg	41,000	10	2	0	13 U	8	0	380 J
Anthracene	ug/Kg	50,000	10	2	0	21 J	8	0	500 J
Benzo(a)anthracene	ug/Kg	224	10	2	0	57 J	8	2	1,100 J
Benzo(a)pyrene	ug/Kg	61	8	2	0	53	6	3	1,100
Benzo(b)fluoranthene	ug/Kg	1,100	10	2	0	47 U	8	0	910 J
Benzo(g,h,i)perylene	ug/Kg	50,000	8	2	0	30 J	6	0	630 J
Benzo(k)fluoranthene	ug/Kg	1,100	10	2	0	51 J	8	1	1,300 J
Chrysene	ug/Kg	400	10	2	0	60 J	8	2	1,400 J
Dibenzo(a,h)anthracene	ug/Kg	14	10	2	0	11 M	8	4	220
Fluoranthene	ug/Kg	50,000	10	2	0	110 J	8	0	2,700
Fluorene	ug/Kg	50,000	10	2	0	24 U	8	0	420 U
Indeno(1,2,3-cd)pyrene	ug/Kg	3,200	10	2	0	29 J	8	0	620 J
Naphthalene	ug/Kg	13,000	10	2	0	39 U	8	0	420 U
Phenanthrene	ug/Kg	50,000	10	2	0	87 J	8	0	2,200
Pyrene	ug/Kg	50,000	10	2	0	110 J	8	0	2,300

TABLE 32
Summary of TCRA Soil Analytical Results - SEAD-67
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

AREA 2			Floor Samples				Perimeter Samples		
Parameter	Units	Cleanup Goal ¹	Total No. of Samples Collected	No. of Samples Collected	No. of Exceedences	Max Result	No. of Samples Collected	No. of Exceedences	Max Result
Metals									
Aluminum	mg/Kg	19,200	16	8	0	13,700	8	0	13,800
Antimony	mg/Kg	5.9	16	8	2	16.9 U	8	4	17.2 U
Arsenic	mg/Kg	8.2	53	28	0	6.8	25	1	8.7 J
Barium	mg/Kg	300	16	8	0	146	8	0	240
Beryllium	mg/Kg	1.1	16	8	0	0.89 B	8	1	2.9 U
Cadmium	mg/Kg	2.3	16	8	2	4.3 U	8	4	4.4 U
Calcium	mg/Kg	120,500	16	8	0	9,750	8	0	11,000
Chromium	mg/Kg	29	16	8	0	22	8	0	24
Cobalt	mg/Kg	30	16	8	0	12.6	8	0	12.9
Copper	mg/Kg	30	16	8	1	52.5	8	2	78.8
Iron	mg/Kg	35,550	16	8	0	29,800	8	0	32,800
Lead ²	mg/Kg	400	16	8	0	34.5	8	0	56.9
Magnesium	mg/Kg	21,500	16	8	0	4,790	8	0	6,540
Manganese	mg/Kg	1,056	16	8	0	928	8	0	775
Mercury	mg/Kg	0.1	51	27	1	0.12	24	4	0.16
Nickel	mg/Kg	48.9	16	8	0	35.6	8	0	35.9
Potassium	mg/Kg	2,343	16	8	0	2,330	8	0	1,770
Selenium	mg/Kg	2	16	8	3	23.1 U	8	4	23.6
Silver	mg/Kg	0.763	16	8	3	4.3 U	8	4	4.7
Sodium	mg/Kg	170.3	16	8	0	99.1 J	8	0	97.1 J
Thallium	mg/Kg	0.67	16	8	8	31.8 U	8	8	32.4 U
Vanadium	mg/Kg	150	16	8	0	23.7	8	0	23
Zinc	mg/Kg	108.9	53	28	0	107	25	2	127
PAHs									
2-Methylnaphthalene	ug/Kg	36,400	16	8	0	470 U	8	0	500 U
Acenaphthene	ug/Kg	50,000	16	8	0	430 U	8	0	500 U
Acenaphthylene	ug/Kg	41,000	16	8	0	430 U	8	0	500 U
Anthracene	ug/Kg	50,000	16	8	0	430 U	8	0	500 U
Benzo(a)anthracene	ug/Kg	224	15	7	0	90 J	8	0	200 J
Benzo(a)pyrene	ug/Kg	61	11	6	1	87	5	3	120 J
Benzo(b)fluoranthene	ug/Kg	1,100	16	8	0	430 U	8	0	500 U
Benzo(g,h,i)perylene	ug/Kg	50,000	16	8	0	430 U	8	0	500 U
Benzo(k)fluoranthene	ug/Kg	1,100	16	8	0	460 J	8	0	500 U
Chrysene	ug/Kg	400	15	7	0	100 J	8	0	230 J
Dibenzo(a,h)anthracene	ug/Kg	14	9	5	1	23 UM	4	2	27 M
Fluoranthene	ug/Kg	50,000	16	8	0	890	8	0	340 J
Fluorene	ug/Kg	50,000	16	8	0	57 J	8	0	500 U
Indeno(1,2,3-cd)pyrene	ug/Kg	3,200	16	8	0	430 U	8	0	500 U
Naphthalene	ug/Kg	13,000	16	8	0	470 U	8	0	500 U
Phenanthrene	ug/Kg	50,000	16	8	0	720	8	0	250 J
Pyrene	ug/Kg	50,000	16	8	0	1,300	8	0	420 J

TABLE 32
Summary of TCRA Soil Analytical Results - SEAD-67
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Notes:

1. The cleanup goal is based on the New York Technical Administrative Guidance Memorandum (TAGM) 4046 Recommended Soil Cleanup Objectives. Values denoted as Site Background ("SB") in TAGM 4046 were compared with the highlighted values (95th percentile of Seneca Army Depot Site Background) in lieu of the TAGM "SB" since no background cleanup objectives exist for certain parameters.
2. U.S. Environmental Protection Agency Risk Based Residential Cleanup Goal for lead
3. Where exceedances for individual PAHs exist, evaluation of the Benzo(a)pyrene toxicity equivalent for total carcinogenic PAHs (cPAHs) would not exceed the 10,000 µg/kg limit for total cPAHs for any sample collected. The cPAHs include: benzo(a)pyrene; dibenzo(a,h)anthracene; benzo(a,h)anthracene; benzo(b)fluoranthene; indeno(1,2,3-cd)pyrene; benzo(k)fluoranthene; and chrysene.

	95th percentile of SEDA Site Background
	Result exceeds cleanup criteria

mg/Kg= milligram per kilogram

µg/Kg= microgram per kilogram

J= Result is less than the reporting limit, but greater than or equal to the maximum detection limit.

U= Analyte was not detected at or above the reporting limit.

M= Manually integrated compound.

B = Result is less than the reporting limit but greater than or equal to the instrument detection limit

TABLE 33
Summary of ESI Soil Analytical Results - SEAD-67
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
SVOCs							
2-Methylnaphthalene	ug/Kg	44	25%	36,400	0	2	8
Acenaphthene	ug/Kg	50	13%	50,000	0	1	8
Acenaphthylene	ug/Kg	210	50%	41,000	0	4	8
Anthracene	ug/Kg	140	50%	50,000	0	4	8
Benzo(a)anthracene	ug/Kg	610	63%	220	4	5	8
Benzo(a)pyrene	ug/Kg	830	63%	61	4	5	8
Benzo(b)fluoranthene	ug/Kg	1,300	63%	1,100	1	5	8
Benzo(g,h,i)perylene	ug/Kg	620	63%	50,000	0	5	8
Benzo(k)fluoranthene	ug/Kg	28	13%	1,100	0	1	8
bis(2-Ethylhexyl)phthalate	ug/Kg	250	38%	50,000	0	3	8
Carbazole	ug/Kg	80	38%	50,000	0	3	8
Chrysene	ug/Kg	690	63%	400	1	5	8
Dibenz(a,h)anthracene	ug/Kg	310	50%	14	4	4	8
Dibenzofuran	ug/Kg	50	13%	6,200	0	1	8
Di-n-butylphthalate	ug/Kg	47	13%	8,100	0	1	8
Fluoranthene	ug/Kg	860	75%	50,000	0	6	8
Fluorene	ug/Kg	110	38%	50,000	0	3	8
Indeno(1,2,3-cd)pyrene	ug/Kg	620	63%	3,200	0	5	8
Naphthalene	ug/Kg	34	25%	13,000	0	2	8
Phenanthrene	ug/Kg	740	63%	50,000	0	5	8
Pyrene	ug/Kg	950	75%	50,000	0	6	8
Pesticides/PCBs							
4,4'-DDE	ug/Kg	4.8	50%	2,100	0	4	8
4,4'-DDT	ug/Kg	9.4	38%	2,100	0	3	8
alpha-Chlordane	ug/Kg	2.1	38%	540	0	3	8
Aroclor-1254	ug/Kg	72	13%	1,000	0	1	8
Endosulfan I	ug/Kg	25	75%	900	0	6	8
Endosulfan sulfate	ug/Kg	2.1	13%	1,000	0	1	8
Heptachlor epoxide	ug/Kg	5.5	25%	20	0	2	8
Metals							
Aluminum	mg/Kg	19,100	100%	19,300	0	8	8
Antimony	mg/Kg	0.44	63%	5.9	0	5	8
Arsenic	mg/Kg	6	100%	8.2	0	8	8
Barium	mg/Kg	182	100%	300	0	8	8
Beryllium	mg/Kg	0.87	100%	1.1	0	8	8
Cadmium	mg/Kg	0.73	100%	2.3	0	8	8
Calcium	mg/Kg	139,000	100%	121,000	1	8	8
Chromium	mg/Kg	24.8	100%	29.6	0	8	8
Cobalt	mg/Kg	12.8	100%	30	0	8	8
Copper	mg/Kg	29.7	100%	33	0	8	8
Iron	mg/Kg	27,300	100%	36,500	0	8	8
Lead	mg/Kg	40.9	100%	24.8	1	8	8
Magnesium	mg/Kg	20,900	100%	21,500	0	8	8
Manganese	mg/Kg	1,380	100%	1,060	1	8	8
Mercury	mg/Kg	4	100%	0.1	3	8	8
Nickel	mg/Kg	32.3	100%	49	0	8	8
Potassium	mg/Kg	3,160	100%	2,380	2	8	8
Selenium	mg/Kg	2	75%	2	0	6	8
Sodium	mg/Kg	112	75%	172	0	6	8
Thallium	mg/Kg	0.48	13%	0.7	0	1	8
Vanadium	mg/Kg	31.8	100%	150	0	8	8
Zinc	mg/Kg	100	100%	110	0	8	8
Other Analyses							
Total Solids	%W/W	90.2	100%		0	8	8

Notes:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.

TABLE 34
Summary of ESI Groundwater Analytical Results - SEAD-67
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	Criteria Level ⁽²⁾		Number of Exceedances	Number of Detects	Number of Analyses
METALS								
Aluminum	ug/L	5,790	100%	50 (a)		3	3	3
Arsenic	ug/L	2.5	33%	10 (b)		0	1	3
Barium	ug/L	203	100%	1,000		0	3	3
Beryllium	ug/L	0.72	33%	4 (c)		0	1	3
Calcium	ug/L	351,000	100%	(d)		0	3	3
Chromium	ug/L	10	100%	50		0	3	3
Cobalt	ug/L	12.3	100%	(d)		0	3	3
Copper	ug/L	13.1	100%	200		0	3	3
Iron	ug/L	10,800	100%	300		3	3	3
Lead	ug/L	8.3	33%	15 (c)		0	1	3
Magnesium	ug/L	51,800	100%	(d)		0	3	3
Manganese	ug/L	1,710	100%	50 (a)		3	3	3
Mercury	ug/L	0.09	67%	0.7		0	2	3
Nickel	ug/L	15.9	100%	100		0	3	3
Potassium	ug/L	5,740	100%	(d)		0	3	3
Sodium	ug/L	13,700	100%	20,000		0	3	3
Thallium	ug/L	2	33%	2 (c)		0	1	3
Vanadium	ug/L	9.2	100%	(d)		0	3	3
Zinc	ug/L	29.6	100%	5,000 (a)		0	3	3
OTHER ANALYSES								
Turbidity	NTU	>1000	67%	(d)		0	2	2

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class GA Groundwater, except as noted below.

- a) USEPA Secondary Drinking Water Regulation, non-enforceable (EPA 822-B-00-001, Summer 2000)
- b) USEPA Maximum Contaminant Limit announced 10/31/01. Source <http://www.epa.gov/safewater/arsenic.html>
- c) USEPA National Primary Drinking Water Standards, EPA 816-F-01-007 March 2001
- d) No standard

NTU = Nephelometric turbidity unit

TABLE 35
Summary of ESI Surface Water Analytical Results - SEAD-67
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC AWQS Class C ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
METALS							
Aluminum	ug/L	129	100%	100	1	2	2
Barium	ug/L	45.8	100%	NS	0	2	2
Calcium	ug/L	77,100	100%	NS	0	2	2
Copper	ug/L	1.1	100%	17.3	0	2	2
Iron	ug/L	369	100%	300	1	2	2
Magnesium	ug/L	14,700	100%	NS	0	2	2
Manganese	ug/L	161	100%	NS	0	2	2
Potassium	ug/L	1,160	100%	NS	0	2	2
Sodium	ug/L	7,860	100%	NS	0	2	2
Thallium	ug/L	2.1	50%	8	0	1	2
Zinc	ug/L	3.3	100%	159.2	0	2	2
OTHER ANALYSES							
pH	Standard Units	7.9	100%	6.5 - 9	0	2	2
Conductivity	umhos/cm	445	100%	NS	0	2	2
Temperature	°C	22.7	100%	NS	0	2	2
Turbidity	NTU	1.6	100%	NS	0	2	2

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class C Surface Water.

Hardness dependent values assume a hardness of 216.4 mg/L (SEDA site-wide average).

NS = No standard

NTU = Nephelometric turbidity unit

TABLE 36
Summary of ESI Sediment Analytical Results - SEAD-67
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC Sediment Criteria ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
VOCS							
2-Butanone	ug/Kg	53	50%	(d)	0	1	2
Acetone	ug/Kg	21	50%	(d)	0	1	2
SVOCS							
Acenaphthene	ug/Kg	120	50%	5,474 (a)	0	1	2
Acenaphthylene	ug/Kg	54	50%	(d)	0	1	2
Anthracene	ug/Kg	600	50%	4,184 (a)	0	1	2
Benzo(a)anthracene	ug/Kg	1400	100%	50.83 (b)	2	2	2
Benzo(a)pyrene	ug/Kg	970	100%	50.83 (b)	2	2	2
Benzo(b)fluoranthene	ug/Kg	880	100%	50.83 (b)	2	2	2
Benzo(g,h,i)perylene	ug/Kg	370	100%	(d)	0	2	2
Benzo(k)fluoranthene	ug/Kg	930	100%	50.83 (b)	2	2	2
Carbazole	ug/Kg	78	50%	(d)	0	1	2
Chrysene	ug/Kg	1300	100%	50.83 (b)	2	2	2
Dibenz(a,h)anthracene	ug/Kg	230	50%	(d)	0	1	2
Dibenzofuran	ug/Kg	83	50%	(d)	0	1	2
Fluoranthene	ug/Kg	3400	100%	39,887 (a)	0	2	2
Fluorene	ug/Kg	270	50%	312.8 (a)	0	1	2
Indeno(1,2,3-cd)pyrene	ug/Kg	460	100%	50.83 (b)	2	2	2
Phenanthrene	ug/Kg	2400	100%	4,692 (a)	0	2	2
Pyrene	ug/Kg	3000	100%	37,580 (a)	0	2	2
PESTICIDES/PCBs							
4,4'-DDT	ug/Kg	4.1	50%	0.39 (b)	1	1	2
alpha-Chlordane	ug/Kg	4.8	100%	0.039 (b)	2	2	2
Endosulfan I	ug/Kg	4.1	50%	1.17 (a)	1	1	2
METALS							
Aluminum	mg/Kg	12000	100%	(d)	0	2	2
Arsenic	mg/Kg	4.2	100%	6 (c)	0	2	2
Barium	mg/Kg	95.8	100%	(d)	0	2	2
Beryllium	mg/Kg	0.58	100%	(d)	0	2	2
Cadmium	mg/Kg	0.37	100%	0.6 (c)	0	2	2
Calcium	mg/Kg	13200	100%	(d)	0	2	2
Chromium	mg/Kg	18	100%	26 (c)	0	2	2
Cobalt	mg/Kg	8.3	100%	(d)	0	2	2
Copper	mg/Kg	37.7	100%	16 (c)	2	2	2
Iron	mg/Kg	19800	100%	20,000 (c)	0	2	2
Lead	mg/Kg	17.8	100%	31 (c)	0	2	2
Magnesium	mg/Kg	5030	100%	(d)	0	2	2
Manganese	mg/Kg	731	100%	460 (c)	1	2	2
Nickel	mg/Kg	23.2	100%	16 (c)	2	2	2
Potassium	mg/Kg	1650	100%	(d)	0	2	2
Silver	mg/Kg	1.7	100%	1 (c)	2	2	2
Sodium	mg/Kg	107	100%	(d)	0	2	2
Vanadium	mg/Kg	20.4	100%	(d)	0	2	2
Zinc	mg/Kg	85.4	100%	120 (c)	0	2	2

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Technical Guidance for Screening Contaminated Sediments - January 1999

- a) Benthic Aquatic Life Chronic Toxicity Criteria
- b) Human Health Bioaccumulation Criteria
- c) Lowest Effect Level
- d) No standard

All organic criteria values derived based on assumed Total Organic Carbon content of 39,105 mg/Kg (SEDA average value).

TABLE 37
Summary of Lead Results in Soil After the Treatability Study - SEAD-122B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	Criteria Value ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
Metals							
Lead	mg/Kg	299	100%	400	0	85	85

NOTES:

(1) Only lead results were analyzed in the Treatability Study.

(2) USEPA Risk Based Residential Cleanup Goal for lead.

TABLE 38
Summary of 2002 Soil Analytical Results - SEAD-122B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
Aluminum	mg/Kg	15,100	100%	19,300	0	26	26
Antimony	mg/Kg	670	50%	5.9	2	13	26
Arsenic	mg/Kg	84.6	100%	8.2	2	26	26
Barium	mg/Kg	129	100%	300	0	26	26
Beryllium	mg/Kg	0.81	100%	1.1	0	26	26
Cadmium	mg/Kg	0.9	65%	2.3	0	17	26
Calcium	mg/Kg	191,000	100%	121,000	1	26	26
Chromium	mg/Kg	26.8	100%	29.6	0	26	26
Cobalt	mg/Kg	13.2	100%	30	0	26	26
Copper	mg/Kg	5,690	100%	33	5	26	26
Iron	mg/Kg	28,700	100%	36,500	0	26	26
Lead	mg/Kg	88,700	100%	400	6	85	85
Magnesium	mg/Kg	24,100	100%	21,500	1	26	26
Manganese	mg/Kg	789	100%	1,060	0	26	26
Mercury	mg/Kg	0.078	8%	0.1	0	2	26
Nickel	mg/Kg	40.4	100%	49	0	26	26
Potassium	mg/Kg	2,350	100%	2,380	0	26	26
Selenium	mg/Kg	1.7	35%	2	0	9	26
Silver	mg/Kg	3.4	8%	0.75	1	2	26
Sodium	mg/Kg	388	35%	172	3	9	26
Thallium	mg/Kg	1.7	15%	0.7	2	4	26
Vanadium	mg/Kg	25.3	100%	150	0	26	26
Zinc	mg/Kg	630	100%	110	1	26	26
Total Organic Carbon	mg/Kg	56,500	100%	NS	0	43	43

NOTES:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.

NS = No standard

TABLE 39
Summary of 2002 Groundwater Analytical Results - SEAD-122B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	Criteria Level ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
METALS							
Aluminum	ug/L	508	100%	NS	0	4	4
Antimony	ug/L	19.7	100%	3	4	4	4
Arsenic	ug/L	4.6	50%	25	0	2	4
Barium	ug/L	49.8	100%	1,000	0	4	4
Beryllium	ug/L	0.32	75%	3	0	3	4
Cadmium	ug/L	2.3	75%	5	0	3	4
Calcium	ug/L	118,000	100%	NS	0	4	4
Chromium	ug/L	12.5	100%	50	0	4	4
Copper	ug/L	8.8	100%	200	0	4	4
Iron	ug/L	580	100%	300	2	4	4
Magnesium	ug/L	35,800	100%	NS	0	4	4
Manganese	ug/L	293	100%	300	0	4	4
Nickel	ug/L	3.7	25%	100	0	1	4
Potassium	ug/L	9,920	100%	NS	0	4	4
Sodium	ug/L	18,400	100%	NS	0	4	4
Vanadium	ug/L	14.0	100%	NS	0	4	4
Zinc	ug/L	7.0	100%	2,000 (GV)	0	4	4

NOTES:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class GA Groundwater.
 NS = No standard
 GV = Guidance value

TABLE 40
Summary of EBS Soil Analytical Results - SEAD-122B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Units	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
Metals							
Aluminum	mg/Kg	6,910	100%	19,520	0	6	6
Antimony	mg/Kg	393	100%	6	3	6	6
Arsenic	mg/Kg	117	100%	8.9	2	6	6
Barium	mg/Kg	107	100%	300	0	6	6
Beryllium	mg/Kg	0.2	100%	1.13	0	6	6
Cadmium	mg/Kg	1.1	33%	2.46	0	2	6
Calcium	mg/Kg	54,800	100%	125,300	0	6	6
Chromium	mg/Kg	69.8	100%	30	1	6	6
Cobalt	mg/Kg	6.6	100%	30	0	6	6
Copper	mg/Kg	380	100%	33	6	6	6
Cyanide	mg/Kg	0.8	17%	0.35	1	1	6
Iron	mg/Kg	12,900	100%	37,410	0	6	6
Lead	mg/Kg	42,900	100%	24.4	6	6	6
Magnesium	mg/Kg	15,100	100%	21,700	0	6	6
Manganese	mg/Kg	379	100%	1,100	0	6	6
Nickel	mg/Kg	15.3	100%	50	0	6	6
Potassium	mg/Kg	1,180	100%	2,623	0	6	6
Silver	mg/Kg	1.4	33%	0.8	2	2	6
Vanadium	mg/Kg	12	100%	150	0	6	6
Zinc	mg/Kg	96.5	100%	115	0	6	6

NOTES:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.

NS = No standard

TABLE 41
Summary of Soil Analytical Results - SEAD-122E
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Unit	Maximum Value	Frequency of Detection	NYSDEC TAGM 4046 ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
SVOCs							
Acenaphthene	ug/Kg	340	33%	50,000	0	2	6
Anthracene	ug/Kg	890	67%	50,000	0	4	6
Benzo(a)anthracene	ug/Kg	6,600	83%	224	2	5	6
Benzo(a)pyrene	ug/Kg	8,400	83%	61	2	5	6
Benzo(b)fluoranthene	ug/Kg	11,000	83%	1,100	1	5	6
Benzo(ghi)perylene	ug/Kg	5,500	83%	50,000	0	5	6
Benzo(k)fluoranthene	ug/Kg	11,000	83%	1,100	1	5	6
Bis(2-Ethylhexyl)phthalate	ug/Kg	11	83%	50,000	0	5	6
Butylbenzylphthalate	ug/Kg	5.8	17%	50,000	0	1	6
Carbazole	ug/Kg	2,000	83%	NS	0	5	6
Chrysene	ug/Kg	10,000	83%	400	2	5	6
Di-n-octylphthalate	ug/Kg	6.4	17%	50,000	0	1	6
Dibenz(a,h)anthracene	ug/Kg	1,900	83%	14	5	5	6
Dibenzofuran	ug/Kg	240	33%	6,200	0	2	6
Diethyl phthalate	ug/Kg	36	83%	7,100	0	5	6
Fluoranthene	ug/Kg	22,000	100%	50,000	0	6	6
Fluorene	ug/Kg	440	33%	50,000	0	2	6
Indeno(1,2,3-cd)pyrene	ug/Kg	5,300	83%	3,200	1	5	6
Phenanthrene	ug/Kg	10,000	83%	50,000	0	5	6
Pyrene	ug/Kg	18,000	83%	50,000	0	5	6

Notes:

(1) Only compounds that were detected were included in this list of parameters.

(2) NYSDEC Technical and Administrative Guidance Memorandum (TAGM) HWR-94-4046, Revised January 24, 1994, which are a To Be Considered (TBC) criteria.

NS = No standard.

TABLE 42
Summary of Groundwater Analytical Results - SEAD-122E
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

Parameter ⁽¹⁾	Unit	Maximum Value	Frequency of Detection	Criteria Level ⁽²⁾	Number of Exceedances	Number of Detects	Number of Analyses
SVOCs							
Bis(2-Ethylhexyl)phthalate	ug/L	1.2	100%	50	0	4	4
Fluoranthene	ug/L	0.26	25%	(a)	0	1	4
Hexachlorobutadiene	ug/L	0.31	25%	0.5	0	1	4
Phenanthrene	ug/L	0.16	25%	(a)	0	1	4
Pyrene	ug/L	0.23	25%	(a)	0	1	4

Notes:

- (1) Only compounds that were detected were included in this list of parameters.
- (2) NYSDEC Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1, Revised June 2004), Class GA Groundwater, except as noted below.
 - a) No Standard

TABLE 43
Calculation of Non-Carcinogenic and Carcinogenic Risks - SEAD-13
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

RECEPTOR	EXPOSURE ROUTE	HAZARD INDEX	CANCER RISK
<u>PARK WORKER</u>	Inhalation of Dust in Ambient Air	NQ	7E-08
	Ingestion of Soil	8E-02	2E-06
	Dermal Contact to Soil	3E-03	4E-07
	Ingestion of Groundwater	7E+00	8E-07
	Dermal Contact to Surface Water	3E-03	4E-09
	Dermal Contact to Sediment	7E-04	2E-07
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<u>7E+00</u>	<u>4E-06</u>
<u>RECREATIONAL VISITOR (CHILD)</u>	Inhalation of Dust Ambient Air	NQ	3E-09
	Ingestion of Soil	6E-02	3E-07
	Dermal Contact to Soil	8E-04	3E-08
	Inhalation of Groundwater	NQ	NQ
	Ingestion of Groundwater	3E+00	6E-08
	Dermal Contact to Groundwater	1E-01	3E-08
	Dermal Contact to Surface Water	7E-03	2E-09
	Dermal Contact to Sediment	2E-03	9E-08
<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<u>3E+00</u>	<u>5E-07</u>	
<u>CONSTRUCTION WORKER</u>	Inhalation of Dust in Ambient Air	NQ	3E-08
	Ingestion of Soil	4E-01	4E-07
	Dermal Contact to Soil	4E-03	2E-08
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<u>4E-01</u>	<u>5E-07</u>

NQ= Not Quantified due to lack of toxicity data.

Note: Risk assessment was revised in February 2005 and submitted to NYSDEC and USEPA in a technical memorandum.

TABLE 43
Calculation of Non-Carcinogenic and Carcinogenic Risks - SEAD-13
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

RECEPTOR	EXPOSURE ROUTE	HAZARD INDEX	CANCER RISK
<u>RESIDENT (ADULT)</u>	Inhalation of Dust in Ambient Air	NQ	1E-07
	Ingestion of Soil	2E-01	4E-06
	Dermal Contact to Soil	3E-03	5E-07
	Inhalation of Groundwater	NQ	NQ
	Ingestion of Groundwater	4E+01	2E-04
	Dermal Contact to Groundwater	2E+00	2E-06
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>		<u>4E+01</u>
<u>RESIDENT (CHILD)</u>	Inhalation of Dust Ambient Air	NQ	1E-07
	Ingestion of Soil	1E+00	1E-05
	Dermal Contact to Soil	2E-02	8E-07
	Inhalation of Groundwater	NQ	NQ
	Ingestion of Groundwater	8E+01	1E-04
	Dermal Contact to Groundwater	3E+00	8E-07
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>		<u>9E+01</u>
<u>TOTAL LIFETIME CANCER RISK</u>	Inhalation of Dust in Ambient Air		2E-07
	Ingestion of Soil		1E-05
	Dermal Contact to Soil		1E-06
	Inhalation of Ground Water		NQ
	Ingestion of Ground Water		3E-04
	Dermal Contact to Ground Water		3E-06
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>		

NQ= Not Quantified due to lack of toxicity data.

Note: Risk assessment was revised in February 2005 and submitted to NYSDEC and USEPA in a technical memorandum.

TABLE 44
Calculation of Non-Carcinogenic and Carcinogenic Risks - SEAD-43/56/69
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

RECEPTOR	EXPOSURE ROUTE	HAZARD INDEX	CANCER RISK
<u>PRISON INMATE</u>	Inhalation of Dust in Ambient Air	6E-07	1E-08
	Ingestion of Onsite Soils	2E-02	6E-06
	Dermal Contact to Onsite Soils	2E-02	NQ
	Ingestion of Groundwater	2E-03	NQ
	Inhalation of Groundwater	NQ	NQ
	Dermal Contact to Groundwater	6E-04	NQ
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<i>5E-02</i>	<i>6E-06</i>
<u>PRISON WORKER</u>	Inhalation of Dust Ambient Air	2E-07	4E-09
	Ingestion of Onsite Soils	1E-02	5E-06
	Dermal Contact to Onsite Soils	2E-02	NQ
	Ingestion of Groundwater	1E-03	NQ
	Inhalation of Groundwater	NQ	NQ
	Dermal Contact to Groundwater	4E-04	NQ
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<i>3E-02</i>	<i>5E-06</i>
<u>ON-SITE CONSTRUCTION WORKERS</u>	Inhalation of Dust in Ambient Air	8E-07	5E-10
	Ingestion of Onsite Soils	6E-03	1E-07
	Dermal Contact to Onsite Soils	2E-03	NQ
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<i>8E-03</i>	<i>1E-07</i>
<u>DAY CARE CENTER CHILD</u>	Inhalation of Dust in Ambient Air	5E-07	3E-09
	Ingestion of Onsite Soils	1E-01	1E-05
	Dermal Contact to Onsite Soils	3E-02	NQ
	Ingestion of Groundwater	3E-03	NQ
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<i>1E-01</i>	<i>1E-05</i>
<u>DAY CARE CENTER WORKER</u>	Inhalation of Dust in Ambient Air	2E-07	4E-09
	Ingestion of Onsite Soils	1E-02	5E-06
	Dermal Contact to Onsite Soils	2E-02	NQ
	Ingestion of Groundwater	1E-03	NQ
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<i>3E-02</i>	<i>5E-06</i>

NQ = Not Quantified

TABLE 45
Calculation of Non-Carcinogenic and Carcinogenic Risks - SEAD-44A
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

RECEPTOR	EXPOSURE ROUTE	HAZARD INDEX	CANCER RISK
<u>PRISON INMATE</u>	Inhalation of Dust in Ambient Air	0E+00	5E-09
	Ingestion of Onsite Soils	5E-03	8E-07
	Dermal Contact to Onsite Soils	8E-03	NQ
	Ingestion of Groundwater	2E-03	6E-06
	Dermal Contact to Groundwater	9E-06	8E-07
	Inhalation of Groundwater	NQ	1E-07
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<i>2E-02</i>	<i>8E-06</i>
<u>PRISON WORKER</u>	Inhalation of Dust Ambient Air	1E-10	2E-09
	Ingestion of Onsite Soils	4E-03	6E-07
	Dermal Contact to Onsite Soils	5E-03	NQ
	Ingestion of Groundwater	2E-03	4E-06
	Dermal Contact to Groundwater	6E-06	6E-07
	Inhalation of Groundwater	NQ	9E-08
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<i>1E-02</i>	<i>5E-06</i>
<u>ON-SITE CONSTRUCTION WORKERS</u>	Inhalation of Dust in Ambient Air	2E-06	3E-10
	Ingestion of Onsite Soils	3E-03	1E-07
	Dermal Contact to Onsite Soils	7E-04	NQ
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<i>3E-03</i>	<i>1E-07</i>
<u>DAY CARE CENTER CHILD</u>	Inhalation of Dust in Ambient Air	3E-10	1E-09
	Ingestion of Onsite Soils	3E-02	1E-06
	Dermal Contact to Onsite Soils	1E-02	NQ
	Ingestion of Groundwater	4E-03	2E-06
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<i>5E-02</i>	<i>4E-06</i>
<u>DAY CARE CENTER WORKER</u>	Inhalation of Dust in Ambient Air	1E-10	2E-09
	Ingestion of Onsite Soils	4E-03	6E-07
	Dermal Contact to Onsite Soils	5E-03	NQ
	Ingestion of Groundwater	2E-03	4E-06
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<i>1E-02</i>	<i>5E-06</i>

NQ= Not Quantified due to lack of toxicity data.

TABLE 46
Calculation of Non-Carcinogenic and Carcinogenic Risks - SEAD-44B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

RECEPTOR	EXPOSURE ROUTE	HAZARD INDEX	CANCER RISK
<u>PRISON INMATE</u>	Inhalation of Dust in Ambient Air	6E-10	4E-09
	Ingestion of Onsite Soils	5E-03	1E-06
	Dermal Contact to Onsite Soils	6E-03	NQ
	Ingestion of Groundwater	NQ	NQ
	Dermal Contact to Groundwater	NQ	NQ
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<u>1E-02</u>	<u>1E-06</u>
<u>PRISON WORKER</u>	Inhalation of Dust Ambient Air	2E-10	1E-09
	Ingestion of Onsite Soils	3E-03	7E-07
	Dermal Contact to Onsite Soils	4E-03	NQ
	Ingestion of Groundwater	NQ	NQ
	Dermal Contact to Groundwater	NQ	NQ
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<u>7E-03</u>	<u>7E-07</u>
<u>ON-SITE CONSTRUCTION WORKERS</u>	Inhalation of Dust in Ambient Air	7E-11	2E-11
	Ingestion of Onsite Soils	2E-04	2E-09
	Dermal Contact to Onsite Soils	5E-05	NQ
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<u>3E-04</u>	<u>2E-09</u>
<u>DAY CARE CENTER CHILD</u>	Inhalation of Dust in Ambient Air	5E-10	8E-10
	Ingestion of Onsite Soils	3E-02	2E-06
	Dermal Contact to Onsite Soils	7E-03	NQ
	Ingestion of Groundwater	NQ	NQ
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<u>4E-02</u>	<u>2E-06</u>
<u>DAY CARE CENTER WORKER</u>	Inhalation of Dust in Ambient Air	2E-10	1E-09
	Ingestion of Onsite Soils	3E-03	7E-07
	Dermal Contact to Onsite Soils	4E-03	NQ
	Ingestion of Groundwater	NQ	NQ
	<i>TOTAL RECEPTOR RISK (Nc & Car)</i>	<u>7E-03</u>	<u>7E-07</u>

NQ= Not Quantified due to lack of toxicity data.

TABLE 47
Calculation of Non-Carcinogenic and Carcinogenic Risks - SEAD-52
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

RECEPTOR	EXPOSURE ROUTE	HAZARD INDEX	CANCER RISK
<u>PRISON INMATE</u>	Inhalation of Dust in Ambient Air	NQ	NQ
	Ingestion of Soil	3E-03	7E-07
	Dermal Contact to Soil	NQ	NQ
	<i>TOTAL RECEPTOR RISK</i>	<u>3E-03</u>	<u>7E-07</u>
<u>PRISON WORKER</u>	Inhalation of Dust in Ambient Air	NQ	NQ
	Ingestion of Soil	2E-03	5E-07
	Dermal Contact to Soil	NQ	NQ
	<i>TOTAL RECEPTOR RISK</i>	<u>2E-03</u>	<u>5E-07</u>
<u>CONSTRUCTION WORKER</u>	Inhalation of Dust in Ambient Air	NQ	NQ
	Ingestion of Soil	4E-04	5E-09
	Dermal Contact to Soil	NQ	NQ
	<i>TOTAL RECEPTOR RISK</i>	<u>4E-04</u>	<u>5E-09</u>
<u>DAY CARE CENTER CHILD</u>	Inhalation of Dust in Ambient Air	NQ	NQ
	Ingestion of Soil	2E-02	1E-06
	Dermal Contact to Soil	NQ	NQ
	<i>TOTAL RECEPTOR RISK</i>	<u>2E-02</u>	<u>1E-06</u>
<u>DAY CARE CENTER WORKER</u>	Inhalation of Dust in Ambient Air	NQ	NQ
	Ingestion of Soil	2E-03	5E-07
	Dermal Contact to Soil	NQ	NQ
	<i>TOTAL RECEPTOR RISK</i>	<u>2E-03</u>	<u>5E-07</u>

NQ - Not quantified due to lack of toxicity data.

TABLE 48
Calculation of Non-Carcinogenic and Carcinogenic Risks - SEAD-62
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

RECEPTOR	EXPOSURE ROUTE	HAZARD INDEX	CANCER RISK
<u>PRISON INMATE</u>	Inhalation of Dust in Ambient Air	NQ	3E-09
	Ingestion of Onsite Soils	3E-03	NQ
	Dermal Contact to Onsite Soils	7E-03	NQ
	Ingestion of Groundwater	2E-02	6E-07
	Inhalation of Groundwater	2E-02	3E-07
	Dermal Contact to Groundwater	3E-03	8E-08
	<i>TOTAL RECEPTOR RISK</i>	<i>5E-02</i>	<i>9E-07</i>
<u>PRISON WORKER</u>	Inhalation of Dust in Ambient Air	NQ	1E-09
	Ingestion of Onsite Soils	2E-03	NQ
	Dermal Contact to Onsite Soils	5E-03	NQ
	Ingestion of Groundwater	7E-03	2E-07
	Inhalation of Groundwater	1E-02	2E-07
	Dermal Contact to Groundwater	2E-03	5E-08
	<i>TOTAL RECEPTOR RISK</i>	<i>3E-02</i>	<i>4E-07</i>
<u>ON-SITE CONSTRUCTION WORKERS</u>	Inhalation of Dust in Ambient Air	NQ	1E-09
	Ingestion of Onsite Soils	1E-02	NQ
	Dermal Contact to Onsite Soils	5E-03	NQ
	<i>TOTAL RECEPTOR RISK</i>	<i>2E-02</i>	<i>1E-09</i>
<u>DAY CARE CENTER CHILD</u>	Inhalation of Dust in Ambient Air	NQ	7E-10
	Ingestion of Onsite Soils	2E-02	NQ
	Dermal Contact to Onsite Soils	9E-03	NQ
	Ingestion of Groundwater	3E-02	2E-07
	<i>TOTAL RECEPTOR RISK</i>	<i>6E-02</i>	<i>2E-07</i>
<u>DAY CARE CENTER WORKER</u>	Inhalation of Dust in Ambient Air	NQ	1E-09
	Ingestion of Onsite Soils	2E-03	NQ
	Dermal Contact to Onsite Soils	5E-03	NQ
	Ingestion of Groundwater	7E-03	2E-07
	<i>TOTAL RECEPTOR RISK</i>	<i>1E-02</i>	<i>2E-07</i>

NQ - Not quantified due to lack of toxicity data.

TABLE 49
Calculation of Non-Carcinogenic and Carcinogenic Risks - SEAD-64B
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

RECEPTOR	EXPOSURE ROUTE	HAZARD INDEX	CANCER RISK
<u>PARK WORKER</u>	Inhalation of Dust in Ambient Air	7E-11	5E-12
	Ingestion of Soil	8E-05	8E-08
	Dermal Contact to Soil	NQ	NQ
	Dermal Contact to Surface Water	7E-05	NQ
	Dermal Contact to Sediment	6E-04	7E-08
	<i>TOTAL RECEPTOR RISK</i>	<i>7E-04</i>	<i>1E-07</i>
<u>RECREATIONAL VISITOR (CHILD)</u>	Inhalation of Dust in Ambient Air	3E-11	4E-13
	Ingestion of Soil	6E-05	1E-08
	Dermal Contact to Soil	NQ	NQ
	Dermal Contact to Surface Water	3E-04	NQ
	Dermal Contact to Sediment	2E-03	6E-08
	<i>TOTAL RECEPTOR RISK</i>	<i>3E-03</i>	<i>7E-08</i>
<u>CONSTRUCTION WORKER</u>	Inhalation of Dust in Ambient Air	1E-09	9E-12
	Ingestion of Soil	9E-04	3E-08
	Dermal Contact to Soil	NQ	NQ
	<i>TOTAL RECEPTOR RISK</i>	<i>9E-04</i>	<i>3E-08</i>

NQ - Not quantified due to lack of toxicity data.

TABLE 50
Calculation of Non-Carcinogenic and Carcinogenic Risks - SEAD-64C
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

RECEPTOR	EXPOSURE ROUTE	HAZARD INDEX	CANCER RISK
<u>PRISON INMATE</u>	Inhalation of Dust in Ambient Air	NQ	1E-10
	Ingestion of Soil	8E-04	5E-08
	Dermal Contact to Soil	NQ	NQ
	Ingestion of Groundwater	1E-04	NQ
	Inhalation of Groundwater	NQ	NQ
	Dermal Contact to Groundwater	8E-06	NQ
	<i>TOTAL RECEPTOR RISK</i>	<i>9E-04</i>	<i>5E-08</i>
<u>PRISON WORKER</u>	Inhalation of Dust in Ambient Air	NQ	4E-11
	Ingestion of Soil	5E-04	4E-08
	Dermal Contact to Soil	NQ	NQ
	Ingestion of Groundwater	4E-05	NQ
	Inhalation of Groundwater	NQ	NQ
	Dermal Contact to Groundwater	5E-06	NQ
	<i>TOTAL RECEPTOR RISK</i>	<i>6E-04</i>	<i>4E-08</i>
<u>ON-SITE CONSTRUCTION WORKERS</u>	Inhalation of Dust in Ambient Air	NQ	2E-11
	Ingestion of Soil	3E-03	7E-09
	Dermal Contact to Soil	NQ	NQ
	<i>TOTAL RECEPTOR RISK</i>	<i>3E-03</i>	<i>7E-09</i>
<u>WORKER AT ON-SITE DAY CARE CENTER</u>	Inhalation of Dust in Ambient Air	NQ	4E-11
	Ingestion of Soil	5E-04	4E-08
	Dermal Contact to Soil	NQ	NQ
	Ingestion of Groundwater	4E-05	NQ
	<i>TOTAL RECEPTOR RISK</i>	<i>6E-04</i>	<i>4E-08</i>
<u>CHILD AT ON-SITE DAY CARE CENTER</u>	Inhalation of Dust in Ambient Air	NQ	2E-11
	Ingestion of Soil	5E-03	8E-08
	Dermal Contact to Soil	NQ	NQ
	Ingestion of Groundwater	2E-04	NQ
	<i>TOTAL RECEPTOR RISK</i>	<i>5E-03</i>	<i>8E-08</i>

NQ - Not quantified due to lack of toxicity data.

TABLE 51
Calculation of Non-Carcinogenic and Carcinogenic Risks - SEAD-64D
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

RECEPTOR	EXPOSURE ROUTE	HAZARD INDEX	CANCER RISK
<u>PARK WORKER</u>	Inhalation of Dust in Ambient Air	3E-08	2E-15
	Ingestion of Soil	5E-05	3E-07
	Dermal Contact to Soil	NQ	NQ
	Ingestion of Groundwater	3E+00	NQ
	<i>TOTAL RECEPTOR RISK</i>	<u>3E+00</u>	<u>3E-07</u>
<u>RECREATIONAL VISITOR (CHILD)</u>	Inhalation of Dust in Ambient Air	1E-08	1E-16
	Ingestion of Soil	4E-05	4E-08
	Dermal Contact to Soil	NQ	NQ
	Inhalation of Groundwater	NQ	NQ
	Ingestion of Groundwater	1E+00	NQ
	Dermal Contact to Groundwater	4E-02	NQ
<i>TOTAL RECEPTOR RISK</i>	<u>1E+00</u>	<u>4E-08</u>	
<u>CONSTRUCTION WORKER</u>	Inhalation of Dust in Ambient Air	5E-07	1E-15
	Ingestion of Soil	3E-04	7E-08
	Dermal Contact to Soil	NQ	NQ
	<i>TOTAL RECEPTOR RISK</i>	<u>3E-04</u>	<u>7E-08</u>


NQ - Not quantified due to lack of toxicity data.

Bold values for the risk assessment indicate a value greater than the acceptable risk.

TABLE 52
Calculation of Non-Carcinogenic and Carcinogenic Risks - SEAD-122E
Proposed Plan for Sites Requiring ICs
Seneca Army Depot Activity

RECEPTOR	EXPOSURE ROUTE	HAZARD INDEX	CANCER RISK	LIFETIME CANCER RISK
<u>INDUSTRIAL WORKER</u>	Inhalation of Dust in Ambient Air	0E+00	2E-08	NA
	Ingestion of Soil	1E-03	3E-05	NA
	Dermal Contact to Soil	1E-03	4E-05	NA
	Ingestion of Groundwater	NQ	NQ	NA
	<i>TOTAL RECEPTOR RISK</i>	<i>2E-03</i>	<i>7E-05</i>	NA
<u>CONSTRUCTION WORKER</u>	Inhalation of Dust in Ambient Air	0E+00	8E-09	NA
	Ingestion of Soil	4E-03	4E-06	NA
	Dermal Contact to Soil	1E-03	1E-06	NA
	<i>TOTAL RECEPTOR RISK</i>	<i>5E-03</i>	<i>6E-06</i>	NA
<u>WORKER AT ON-SITE DAY CARE CENTER</u>	Inhalation of Dust in Ambient Air	0E+00	2E-08	NA
	Ingestion of Soil	1E-03	3E-05	NA
	Dermal Contact to Soil	5E-03	2E-04	NA
	Ingestion of Groundwater	NQ	NQ	NA
	<i>TOTAL RECEPTOR RISK</i>	<i>6E-03</i>	<i>2E-04</i>	NA
<u>CHILD AT ON-SITE DAY CARE CENTER</u>	Inhalation of Dust in Ambient Air	0E+00	1E-08	NA
	Ingestion of Soil	1E-02	7E-05	NA
	Dermal Contact to Soil	4E-03	3E-05	NA
	Ingestion of Groundwater	NQ	NQ	NA
	<i>TOTAL RECEPTOR RISK</i>	<i>1E-02</i>	<i>1E-04</i>	NA
<u>CHILD RESIDENT</u>	Inhalation of Dust in Ambient Air	0E+00	3E-08	NA
	Ingestion of Soil	2E-02	1E-04	NA
	Dermal Contact to Soil	2E-02	2E-04	NA
	Ingestion of Groundwater	NQ	NQ	NA
	<i>TOTAL RECEPTOR RISK</i>	<i>4E-02</i>	<i>3E-04</i>	NA
<u>ADULT RESIDENT</u>	Inhalation of Dust in Ambient Air	0E+00	6E-08	9E-08
	Ingestion of Soil	2E-03	4E-05	1E-04
	Dermal Contact to Soil	1E-02	4E-04	6E-04
	Ingestion of Groundwater	NQ	NQ	NQ
	<i>TOTAL RECEPTOR RISK</i>	<i>1E-02</i>	<i>5E-04</i>	<i>8E-04</i>

NQ - Not quantified due to lack of toxicity data.

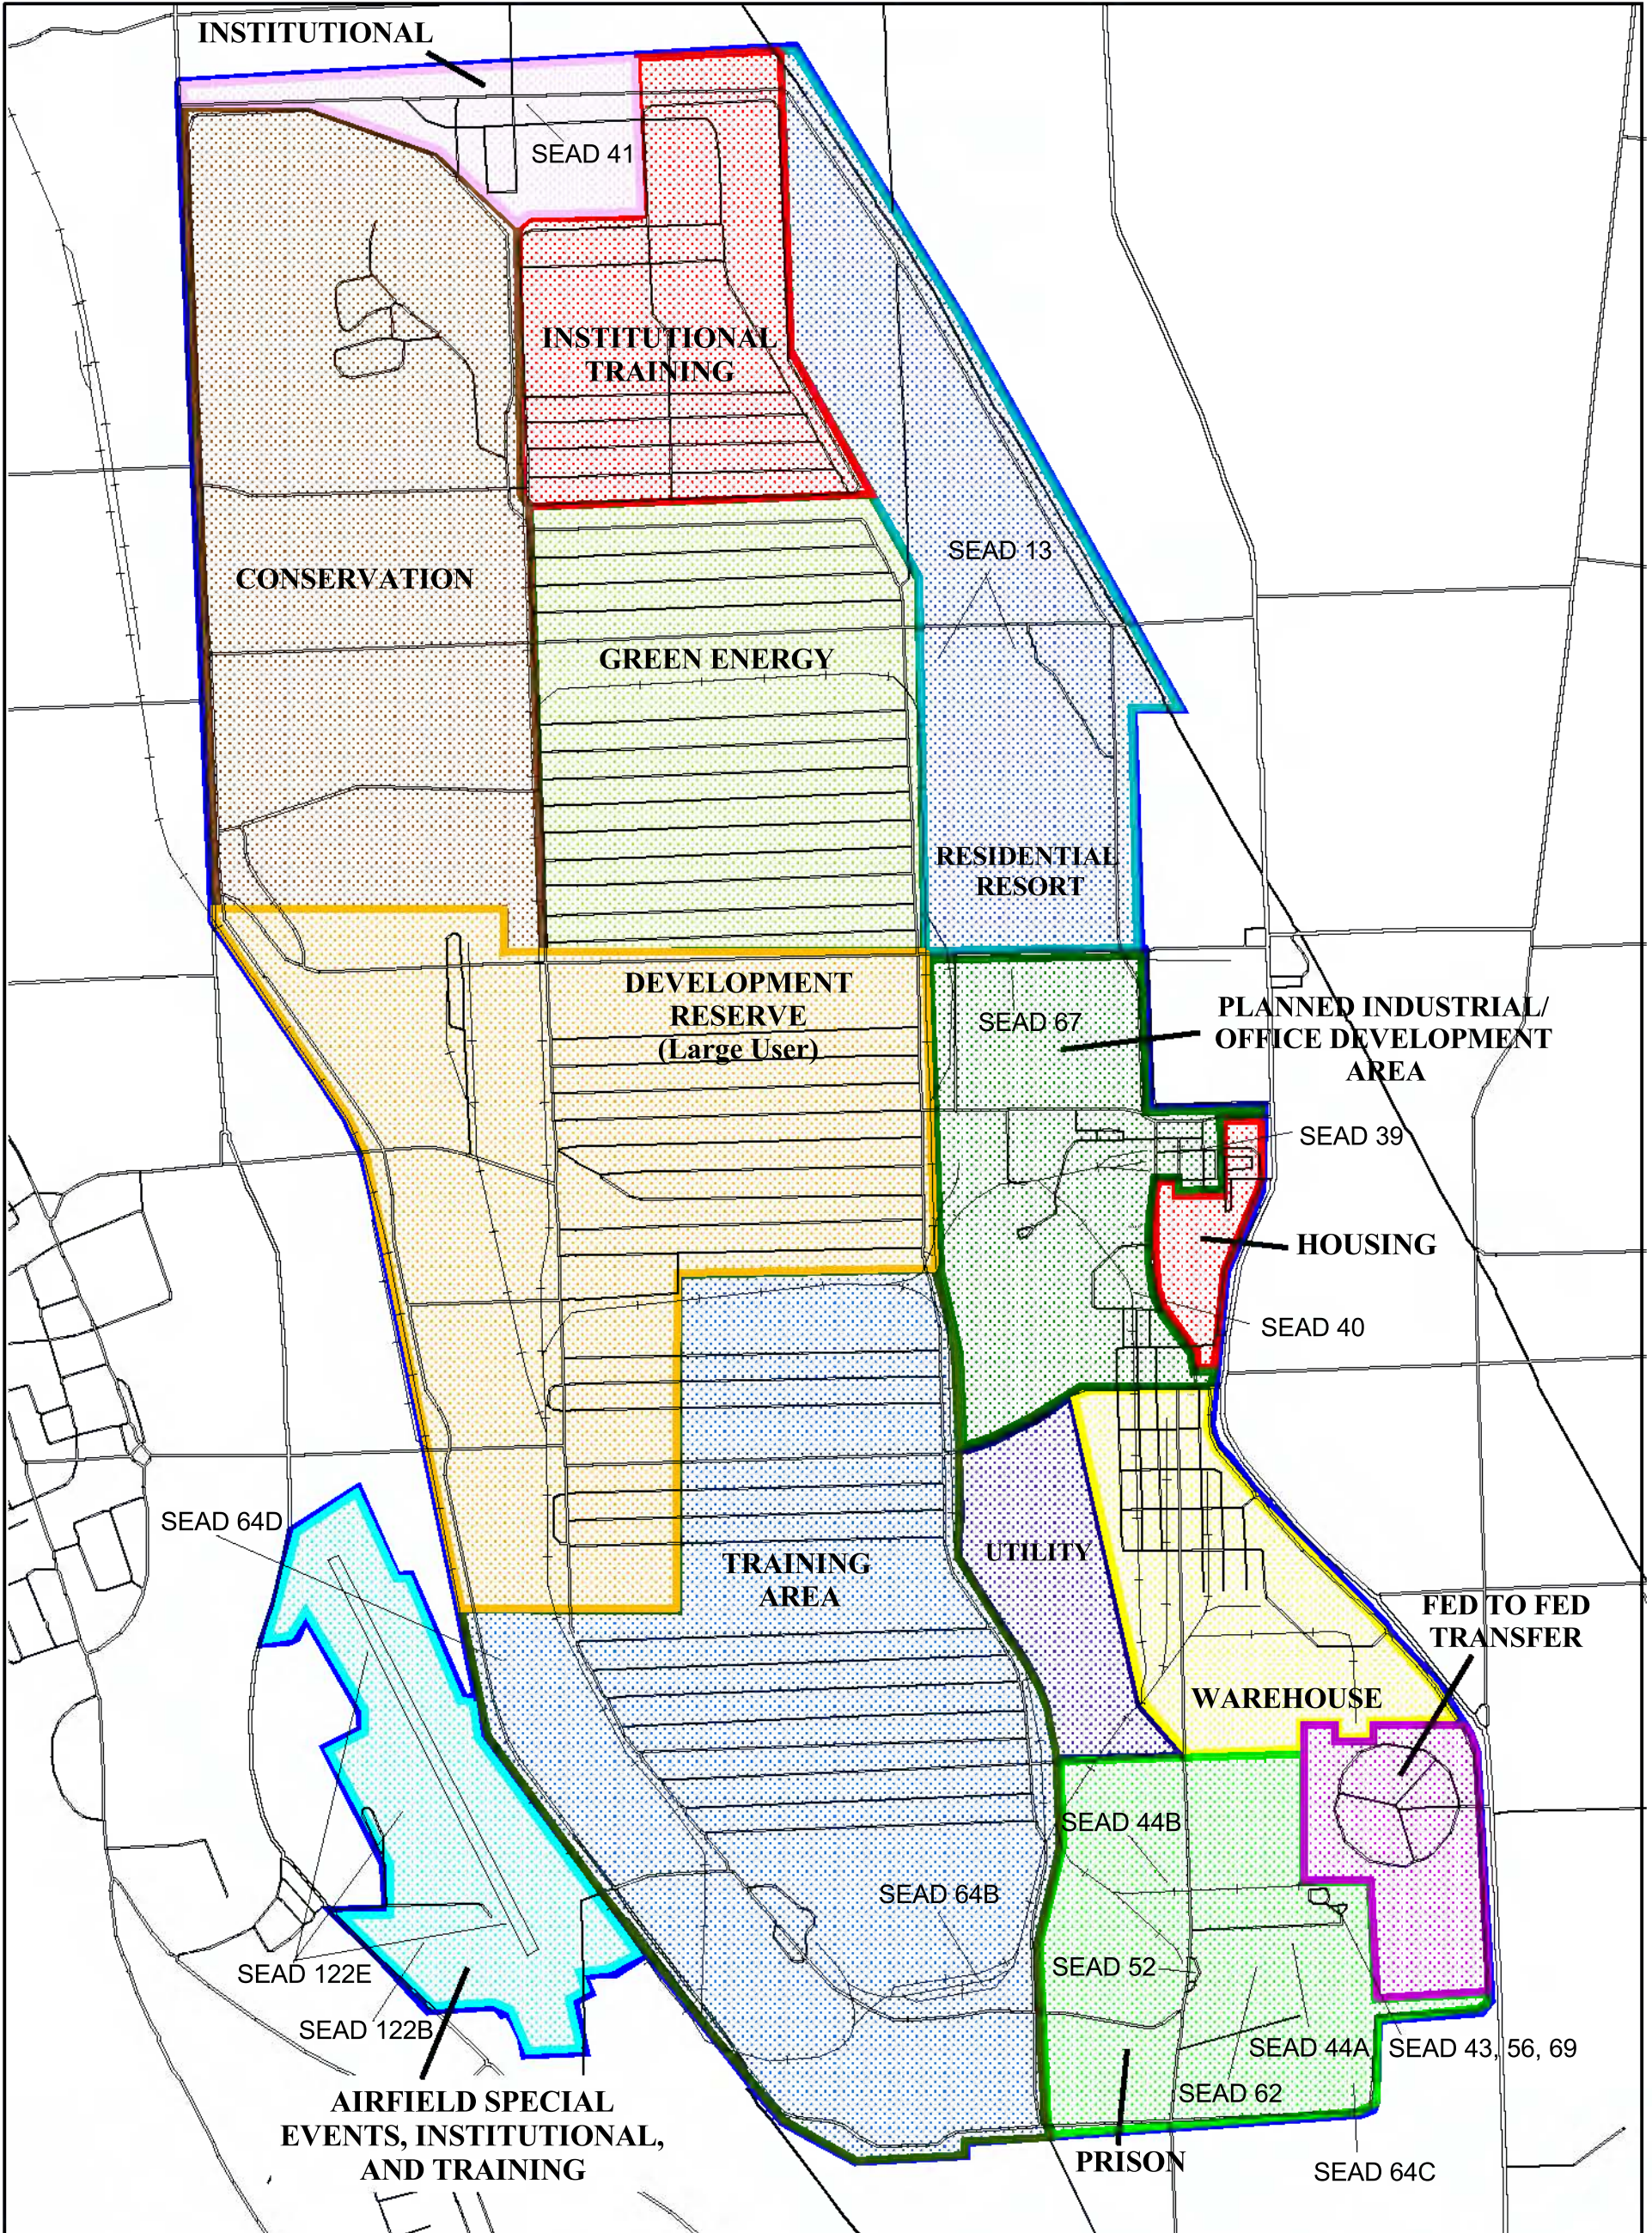

LEGEND



PARSONS

SENECA ARMY DEPOT
PROPOSED PLAN FOR 17
SWMUs REQUIRING ICs



Figure 1
Future Land Use and
Location of IC SWMUs


Scale - 1:3400

OCTOBER 2005

O:\SENECA\NOACT\PRAP-ROD-IC-NEWLAND\USE. APR\Figure 2 - SEAD-13. 67



-  SEDA Boundary
-  SEAD Boundary

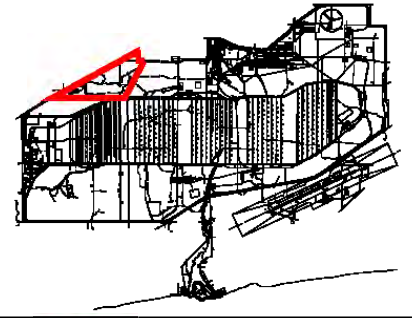

800 0 800 1600 Feet




PARSONS



SENECA ARMY DEPOT
PROPOSED PLAN FOR 17
SWMU's REQUIRING IC's


Figure 2
Location of SEADs 13 and 67

Scale - 1:1600

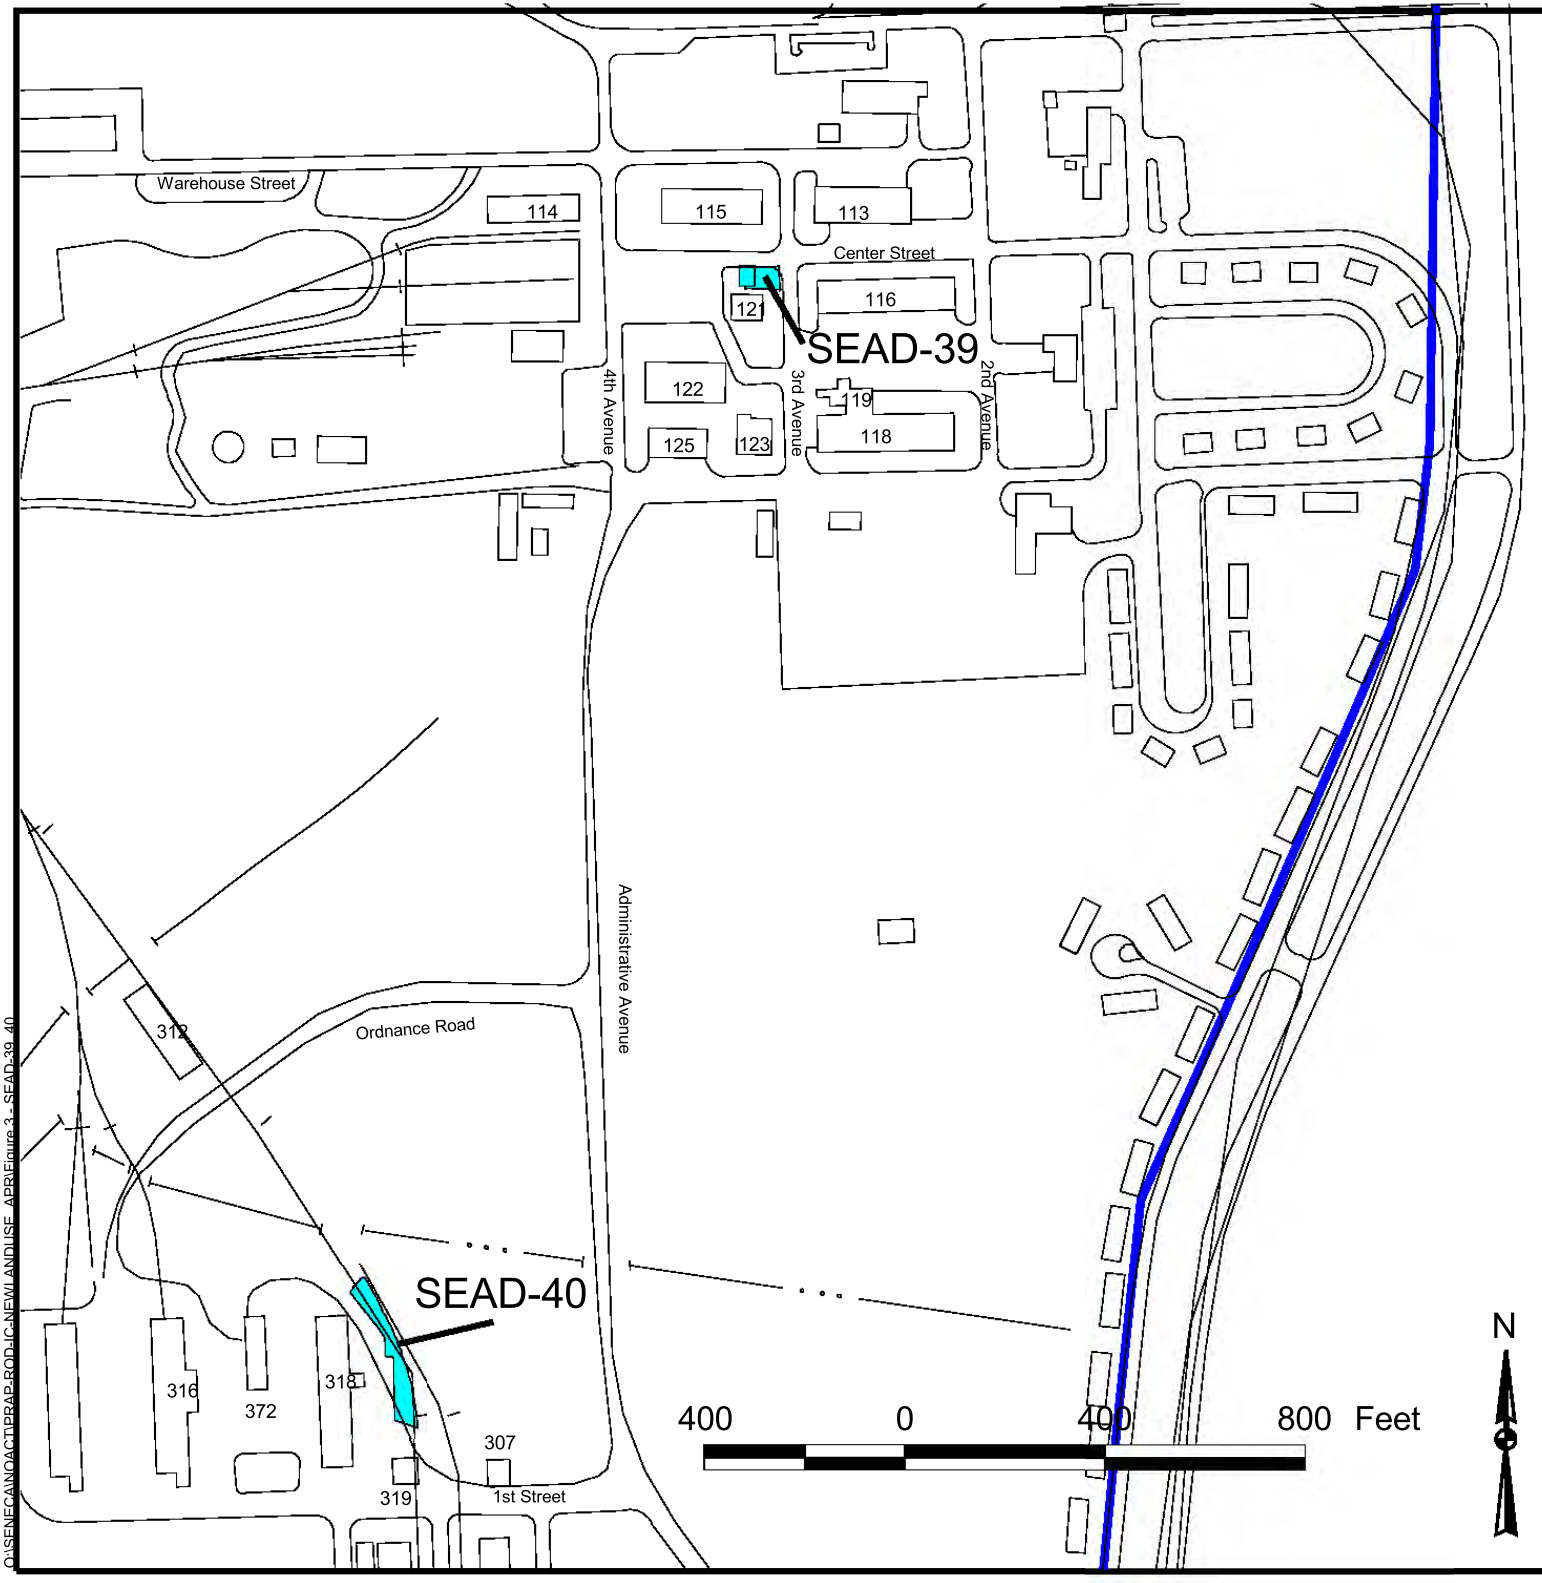OCTOBER 2005



-  SEDA Boundary
-  SEAD Boundary



PARSONS

SENECA ARMY DEPOT
 PROPOSED PLAN FOR 17
 SWMU's REQUIRING IC's


Figure 3
 Location of SEAD-39 and SEAD-40



Scale - 1:400


OCTOBER 2005

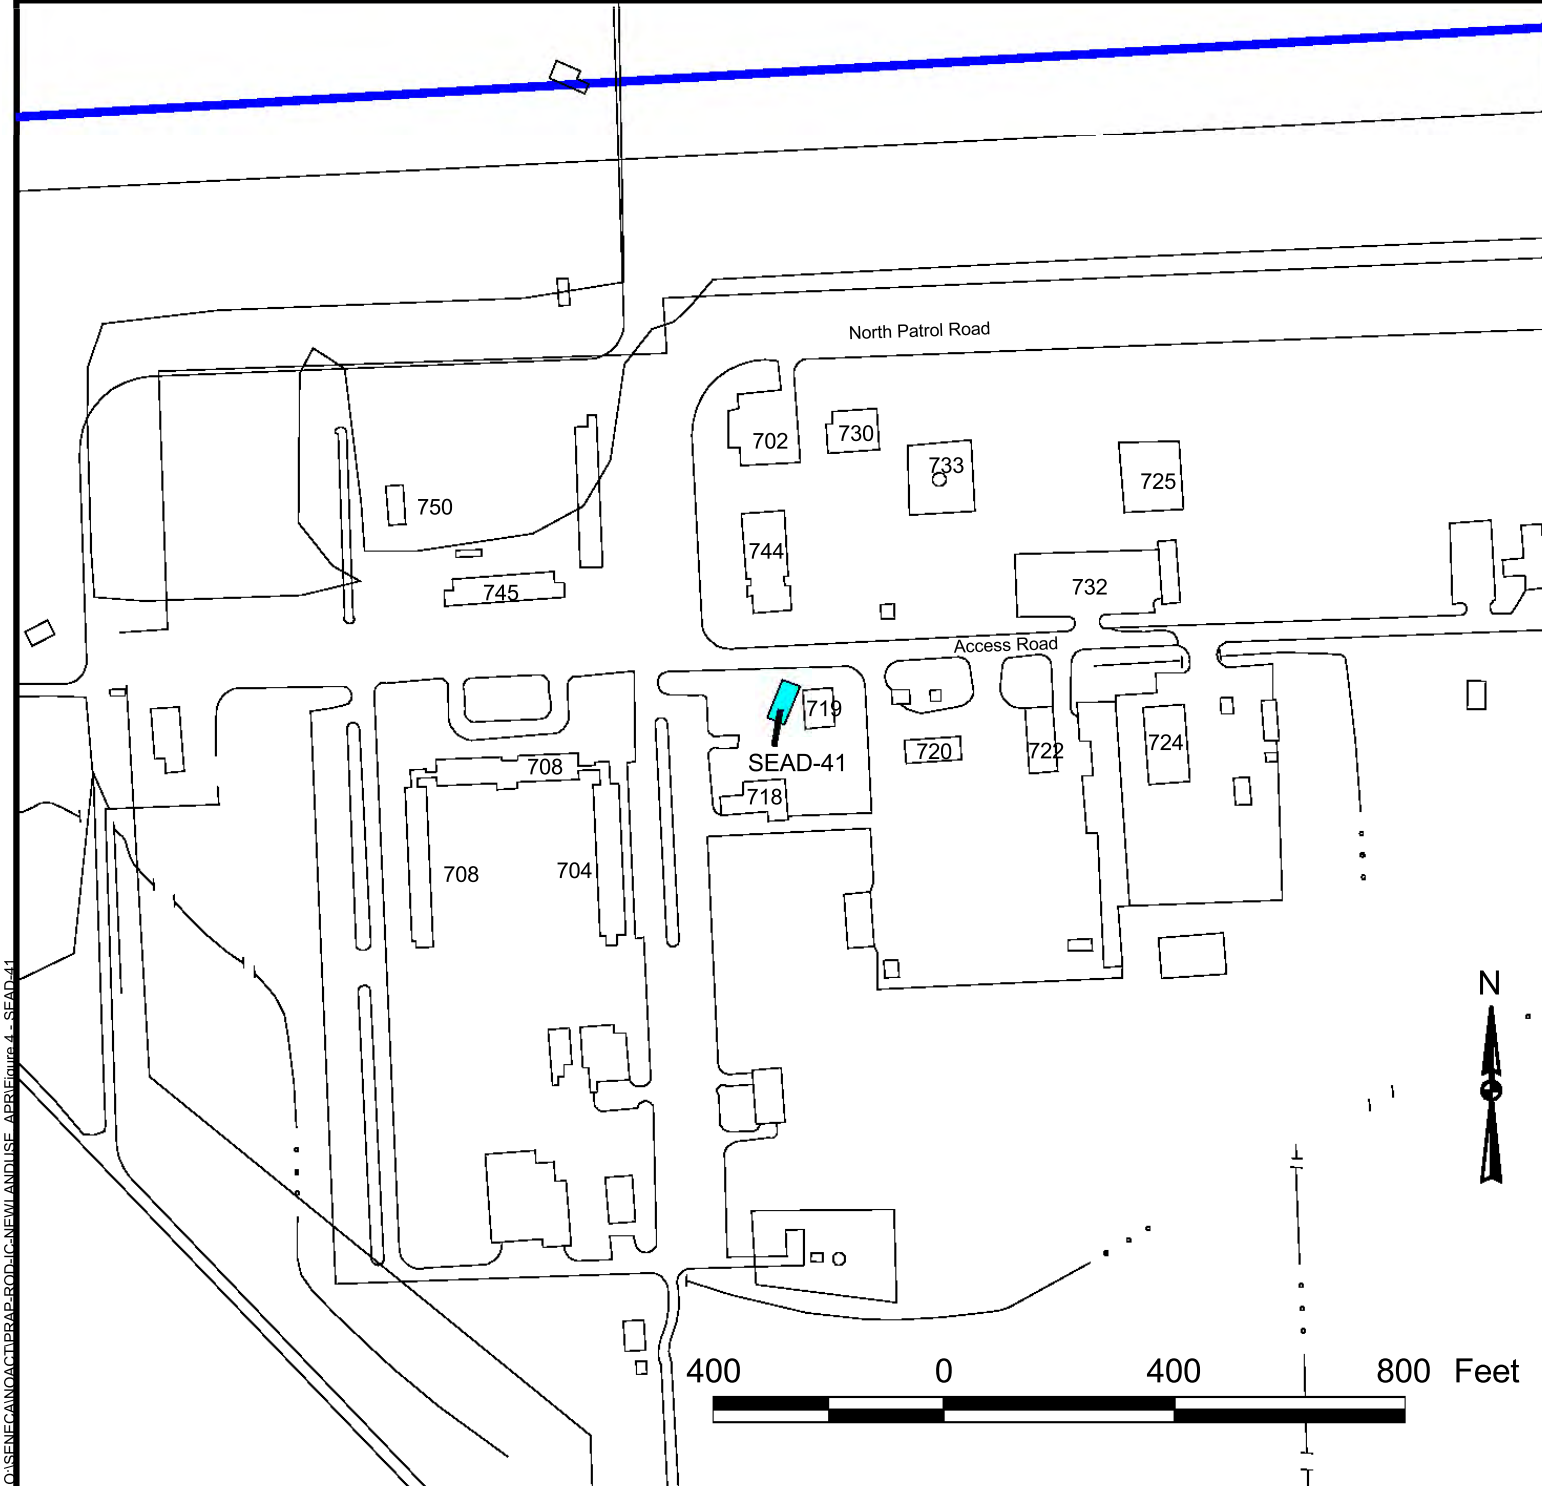

C:\SENECA\NOACT\PRAP-ROD\IC-NEW\AND\USE-APR\Figure 3 - SEAD-39_40



-  SEDA Boundary
-  SEAD Boundary



PARSONS

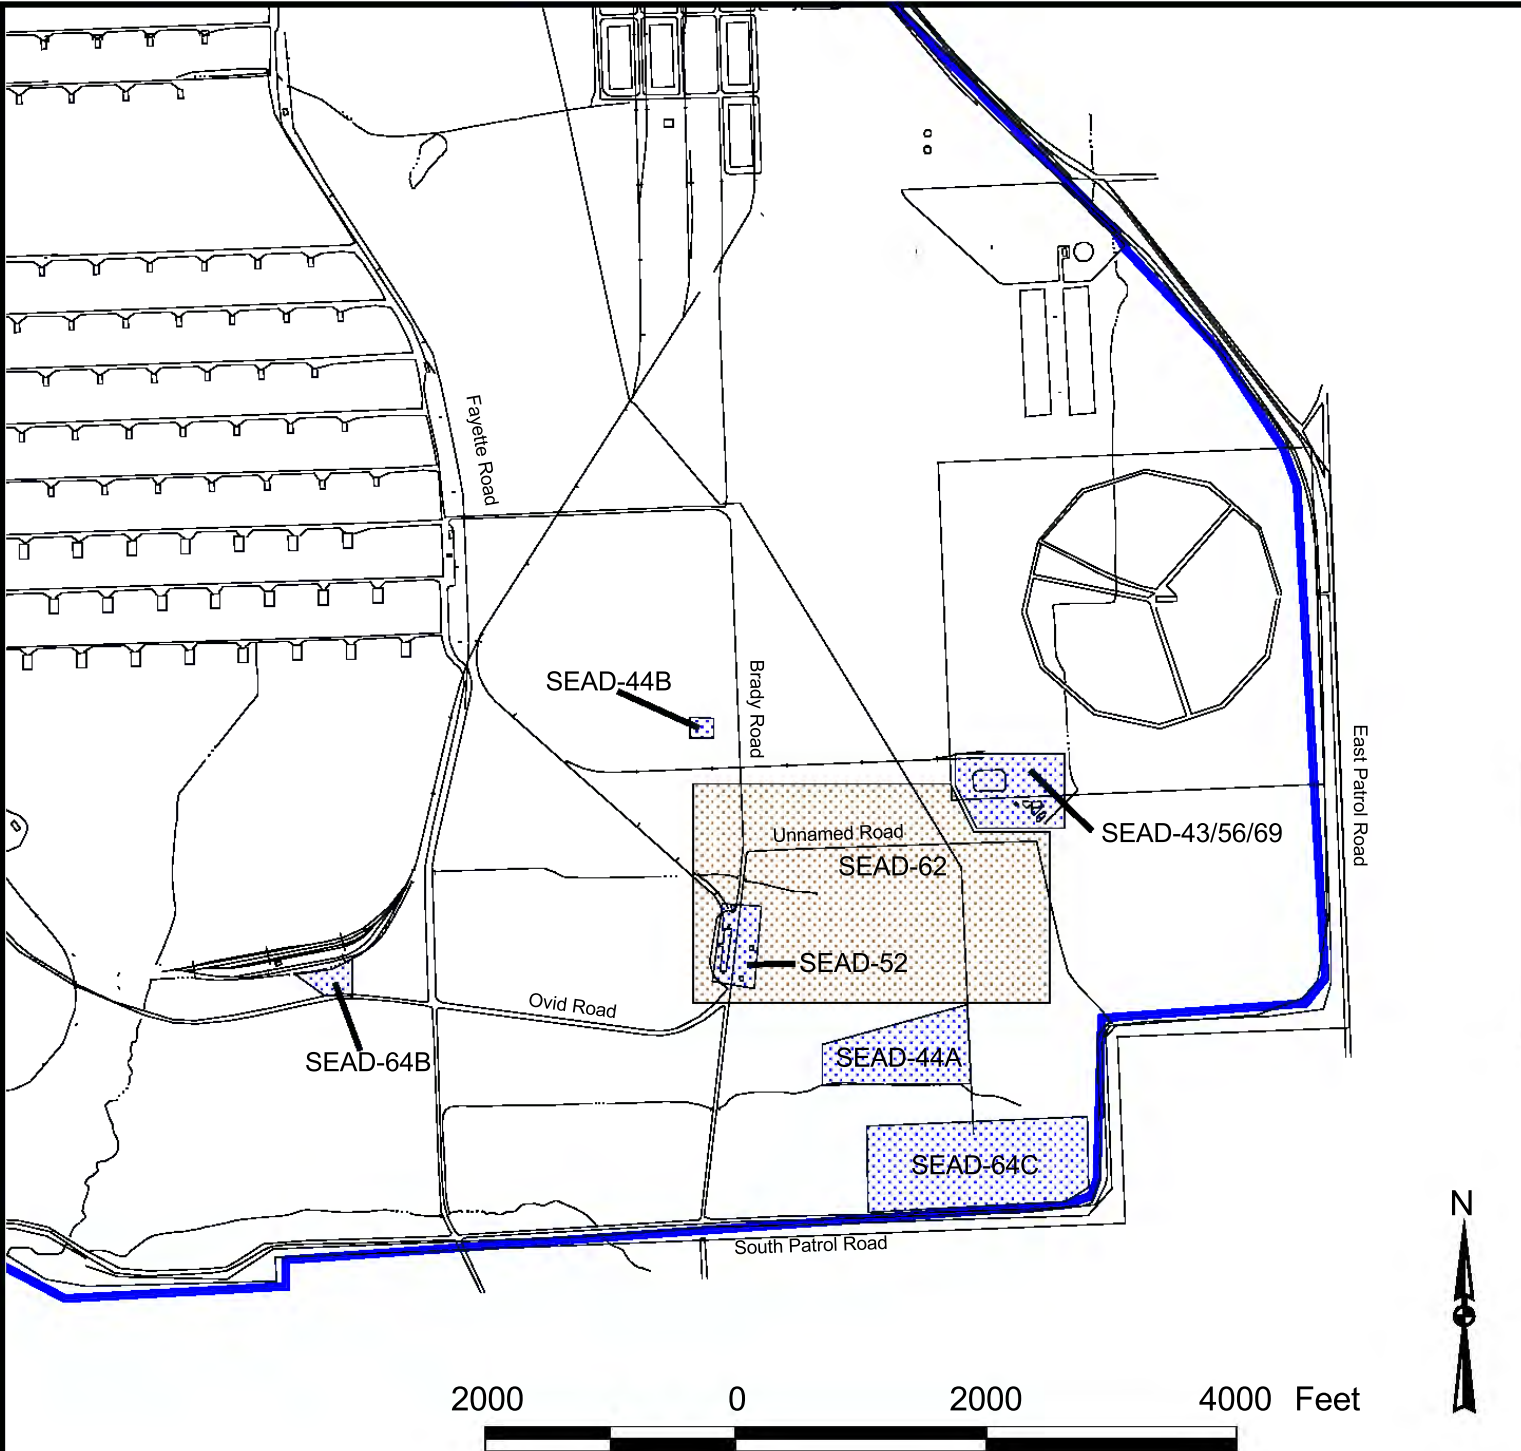
SENECA ARMY DEPOT
PROPOSED PLAN FOR 17
SWMUs REQUIRING ICs



Figure 4
Location of SEAD-41


Scale - 1:400

OCTOBER 2005

C:\SENECA\NOACT\PRAP-ROD\IC-NEW\I\SE-APR\Figure 4 - SEAD-41



-  SEDA Boundary
-  SEAD Boundary



PARSONS



SENECA ARMY DEPOT
PROPOSED PLAN FOR 17
SWMUs REQUIRING ICs


Figure 5
Location of SEADs 43/56/69,
44A, 44B, 52, 62, 64B, and 64C

Scale - 1:1600

OCTOBER 2005



-  SEDA Boundary
-  SEAD Boundary

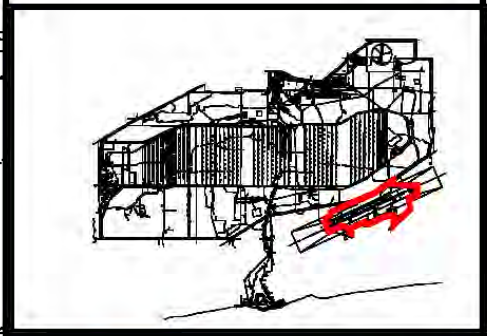

PARSONS

SENECA ARMY DEPOT
PROPOSED PLAN FOR 17
SWMUs REQUIRING ICs

Figure 6
Location of SEADs 64D,
122B, and 122E

Scale - 1:2000

OCTOBER 2005