


SIDEWALL SAMPLING LOCATION DETAIL  
N.T.S.


**LEGEND**

- DRAINAGE DITCH
- UNPAVED ROAD
- GROUND SURFACE ELEVATION CONTOUR
- UNDERGROUND WATER UTILITY LINE
- SEAD-25 SURVEY MONUMENT
- MW25-3 RI/ES1 MONITORING WELL
- SB25-1 RI/ES1 SOIL BORING
- CONFIRMATORY SOIL SAMPLE LOCATION
- INTERIM CONFIRMATORY SOIL SAMPLE LOCATION (REMOVED)
- LIMIT OF INITIAL EXCAVATION
- LIMIT OF ADDITIONAL EXCAVATION
- PROPOSED LIMIT OF EXCAVATION

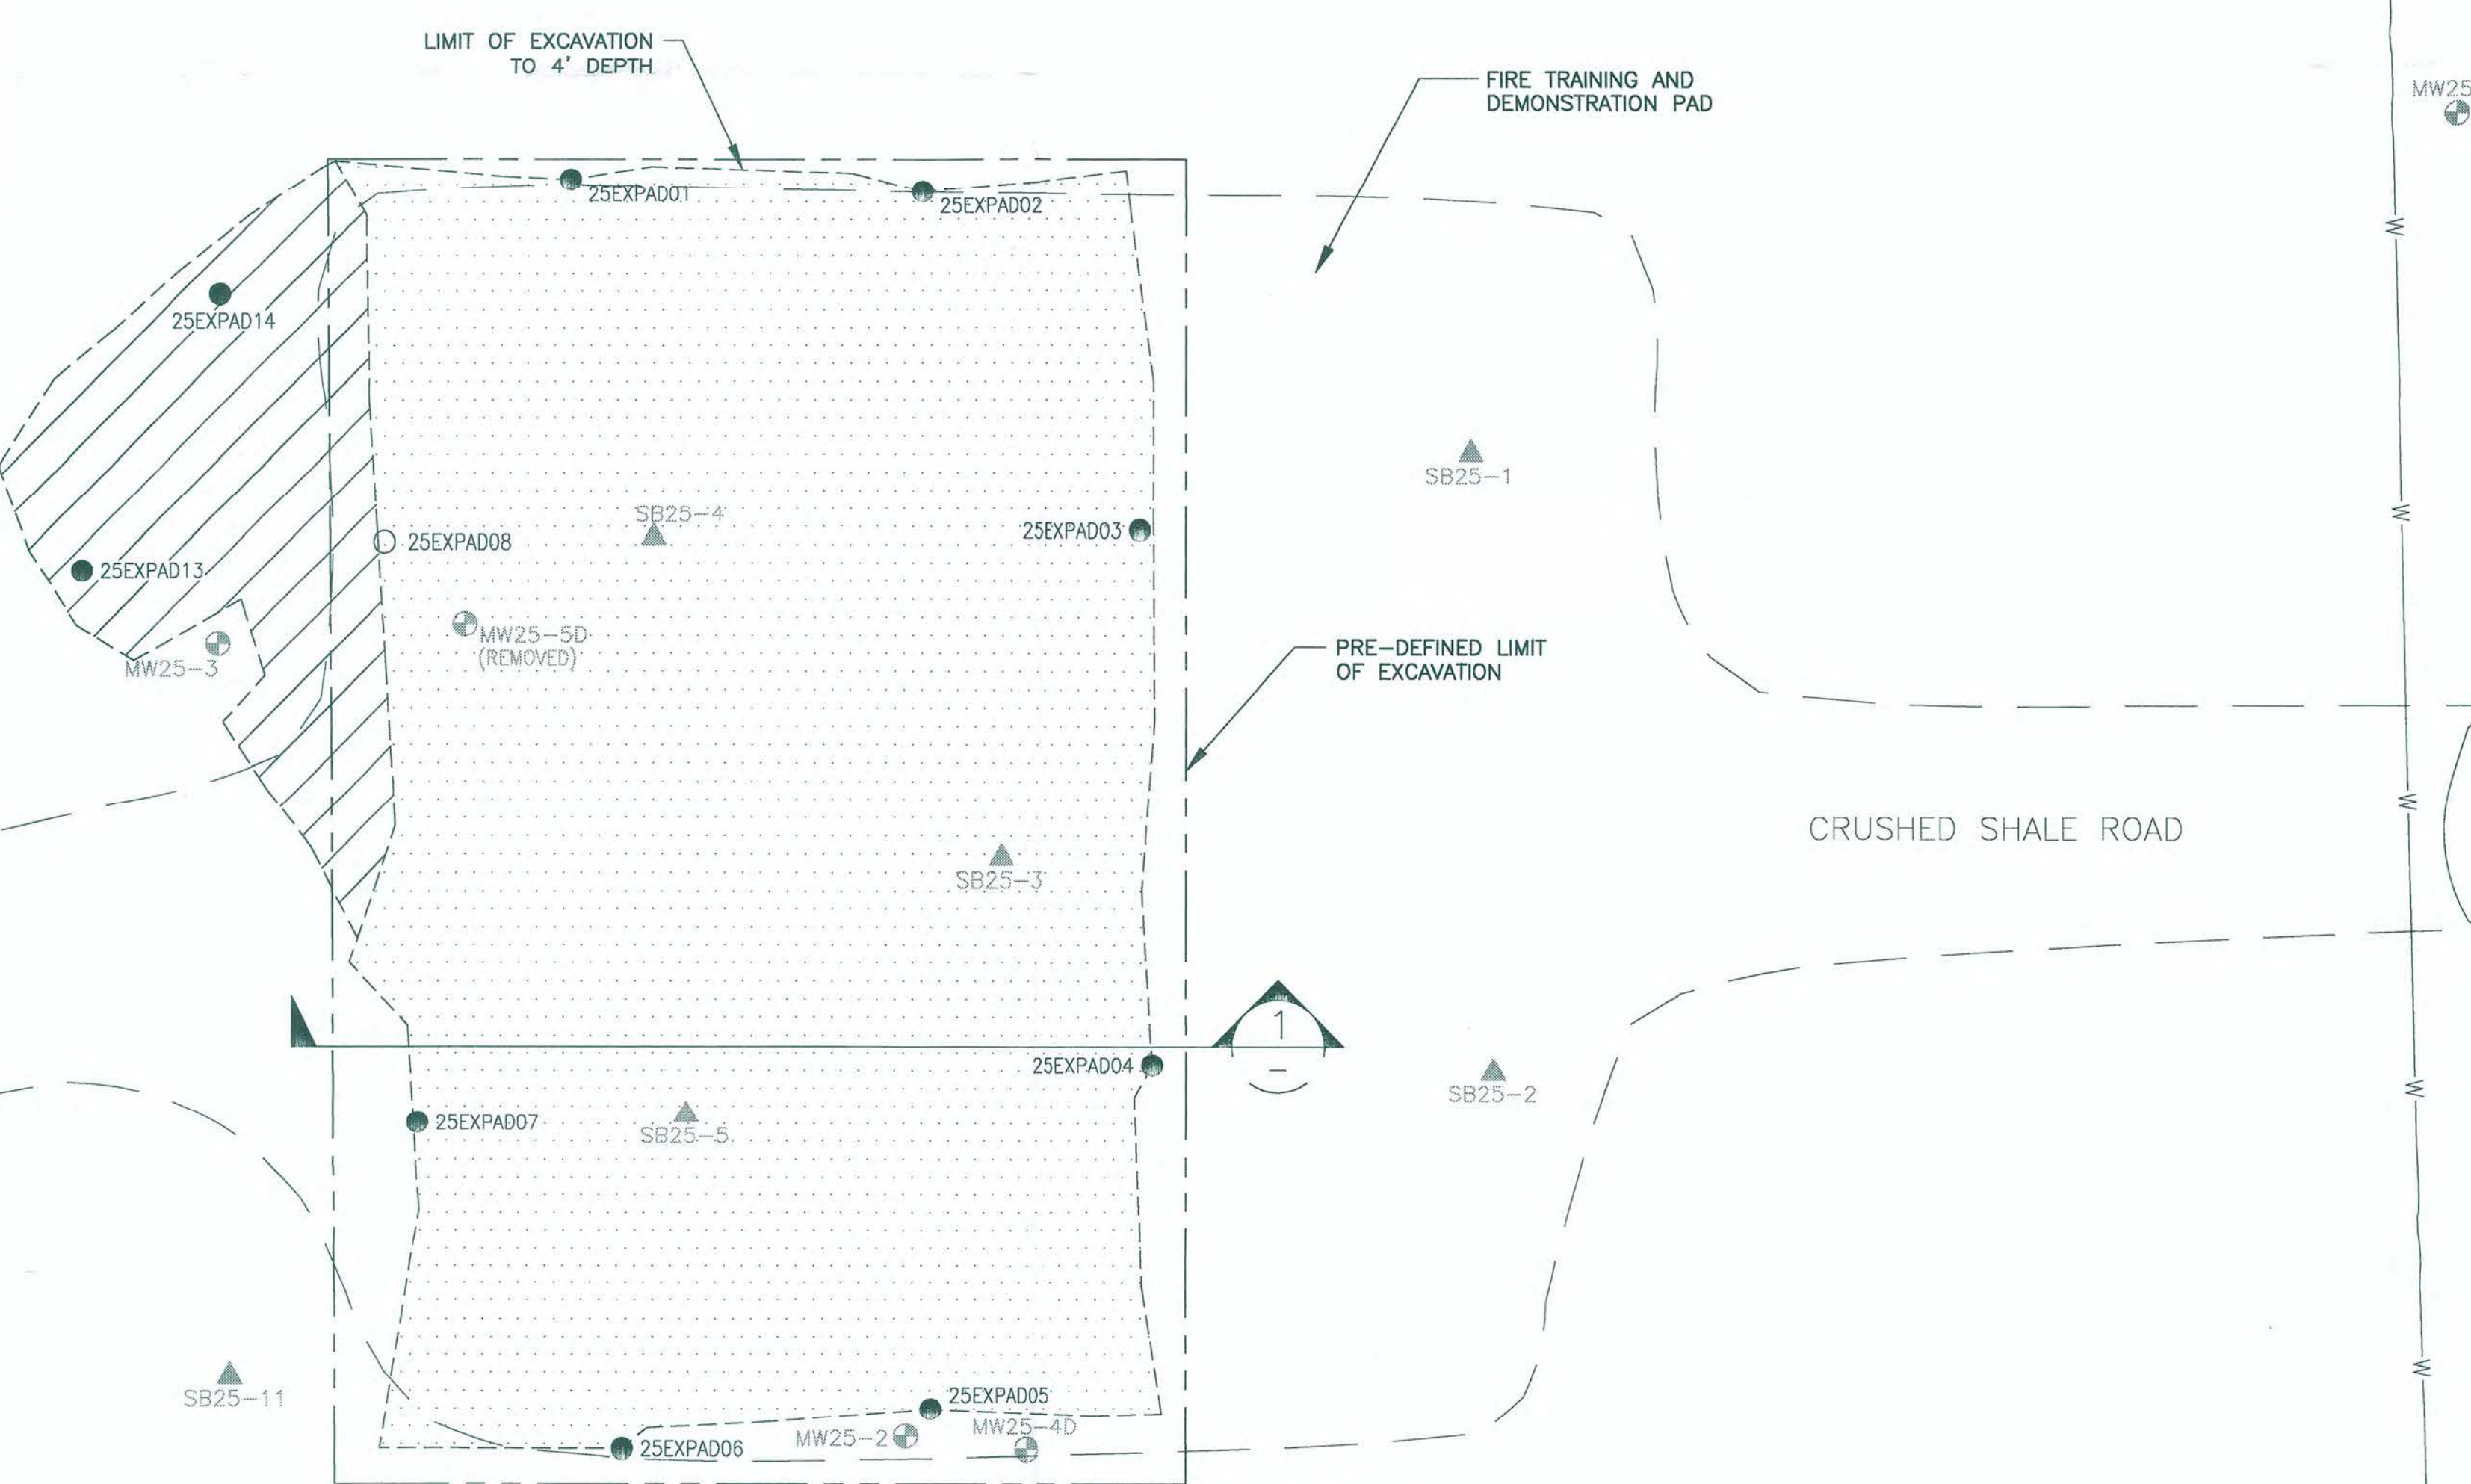

**NOTES:**

1. TOPOGRAPHY BASED ON AERIAL SURVEY BY:  
LOCKWOOD SURVEY  
36 KARLAN DRIVE  
ROCHESTER NEW YORK
2. HORIZONTAL DATUM IS BASED ON NAD83 PER SENECA ARMY DEPOT SEAD 25A MONUMENTS SURVEY CONTROL COORDINATES DATED 1994.
3. VERTICAL DATUM IS BASED ON NAD88.
4. DEPTH OF EXCAVATION EXTENDED UNTIL COMPETENT BEDROCK WAS ENCOUNTERED, WHICH OCCURED AT APPROXIMATELY 4 FT. BGS. THE ELEVATION ALONG THE BOTTOM OF THE EXCAVATION RANGED FROM 738.49 TO 739.95.
5. CONFIRMATORY SAMPLES WERE COLLECTED BY THE ENGINEER AT A DEPTH HALF WAY BETWEEN THE GROUND SURFACE AND THE BASE OF EXCAVATION, APPROXIMATELY 2 FT. BGS.
6. EXCAVATED MATERIALS WERE DIRECTLY LOADED INTO DUMP TRUCKS AND TRANSPORTED TO ONTARIO COUNTY LANDFILL BY EARTHWATCH.
7. THE INTERIM SAMPLE 25EXPAD08 FAILED TO MEET THE CLEANUP GOALS, AND THE SOIL AROUND THE INTERIM SAMPLE WAS EXCAVATED UNTIL BEDROCK WAS ENCOUNTERED, APPROXIMATELY 4 FT. BGS. THE SOIL REPRESENTED BY THE INTERIM SAMPLE HAS BEEN REMOVED FROM THE SITE AND IS NOT CHARACTERISTIC OF CURRENT SITE CONDITIONS.
8. SITE WAS RESTORED BY PLACING CLEAN BACKFILL TO BLEND INTO EXISTING GROUND SURFACE.

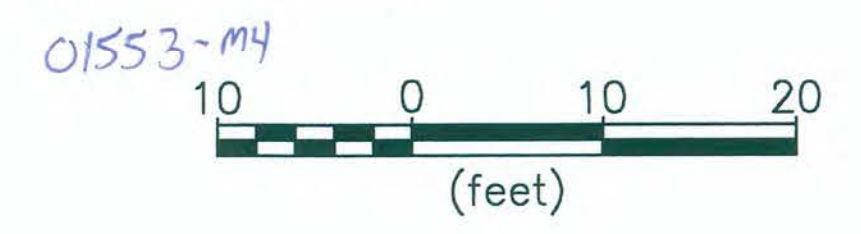

**PARSONS**



CLIENT/PROJECT TITLE		
<b>SENECA ARMY DEPOT ROMULUS, NEW YORK SEAD 25/26 CONSTRUCTION COMPLETION REPORT</b>		
DEPT.	Dwg. No.	
ENVIRONMENTAL ENGINEERING	744538-03000	
<b>C-4 EXCAVATION PLAN SEAD-25 FIRE TRAINING &amp; DEMONSTRATION PAD</b>		
SCALE	DATE	REV
AS SHOWN	FEBRUARY 2006	

P:\IT\Projects\SEAD25\SEAD25-26\Drawings\Construction Completion\23006-C4.dwg  
 Date Plotted: 2/2/2006 10:53:11 AM  
 Plotter: HP DesignJet 5000PS